

EASTON

Easton Gooseneck Lavatory Faucet

ELS260



SHOWN IN EASTON GOOSENECK LAVATORY FAUCET | ELS260

TECHNICAL DETAILS

Deck Thickness Maximum: 1 15/16"
 Deck Thickness Minimum: 3/8"
 Drain Depth Maximum: 2 1/4"
 Drain Depth Minimum: 1 1/2"
 Drain Hole Diameter: 1 1/2"
 Drain Style: Pop-Up
 Fittings Hole Diameter: 1 3/8"
 Handle Spread Maximum: 12"
 Handle Spread Minimum: 8"
 Handle Turn Angle: Quarter Turn
 Inlet Connection Size: 1/2"
 Inlet Connection Type: MALE WITH SUPPLY NUT
 Restricted Maximum Flow Rate: 1.2 gpm
 Valve Material: Ceramic
 Water Pressure Maximum: 85.0 psi
 Water Pressure Minimum: 20.0 psi
 Water Pressure Recommended: 45.0 psi

INSPIRATION

Rooted in classical Edwardian design, Easton is our most expansive collection—offering a comprehensive family of pieces that bring polished detail and timeless tradition to any setting. Revered for its exquisite proportions and impeccable scale, Easton is a trusted choice among designers.

CODES & STANDARDS

ELS260-F.RX, NSF/ANSI/CAN 61:Q < 1, NSF/ANSI/CAN 372, ASME A112.18.1/CSA B125.1, WaterSense(1.0GPM and 1.2GPM Only), CEC, DOE

PRODUCT FEATURES

Wave Lever Handles

Includes Universal Lift and Turn Drain (UNLD23) which fits 1-1/2" through 1-3/4" drain hole openings

Available in 1.2gpm (4.5L/min) flow rate.

Includes interchangeable indices, with the Waterworks logo installed as standard and a complementary set of "H" & "C" indices presented in a velvet pouch, allowing you to tailor the look to your space.

Stocked in Nickel and Brass

CERTIFICATIONS




PRODUCT (NOTES)

EASTON


ELS260

Easton Gooseneck Lavatory Faucet

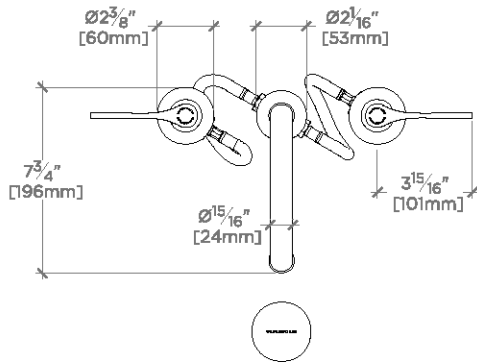


TOP VIEW

SCALE: $1\frac{1}{2}"=1'-0"$

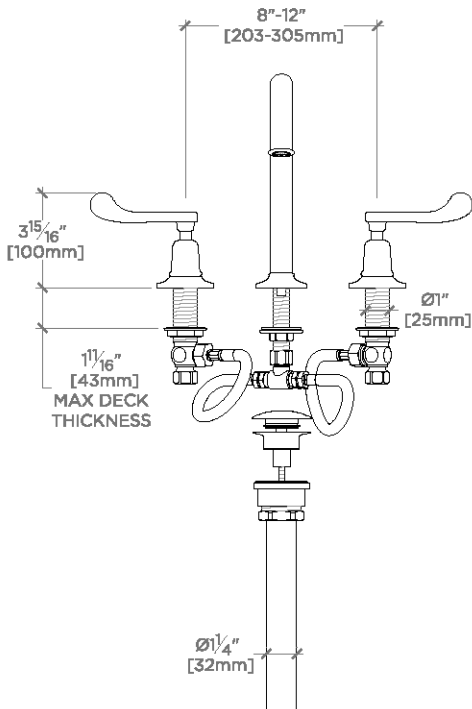

FRONT VIEW

SCALE: $1\frac{1}{2}"=1'-0"$

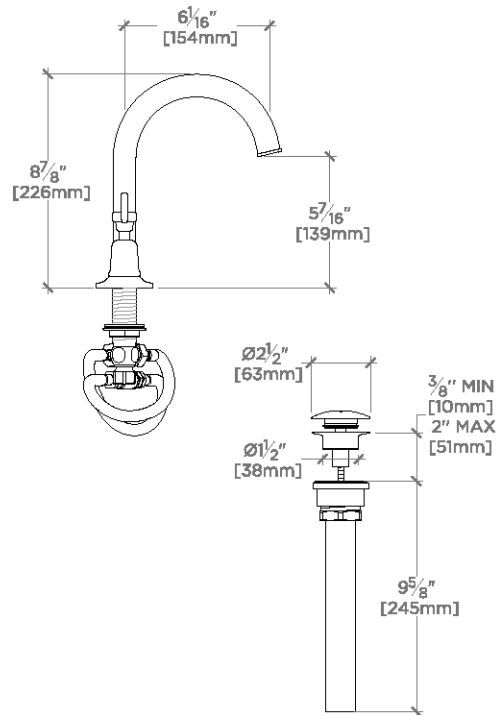

SIDE VIEW

SCALE: $1\frac{1}{2}"=1'-0"$