

EASTON

EAHS33

Easton Classic Handshower with Diverter and White Porcelain Lever Handle



SHOWN IN EASTON CLASSIC HANDSHOWER WITH DIVERTER AND WHITE PORCELAIN LEVER HANDLE | EAHS33

TECHNICAL DETAILS

ADA Compliance: No
 Adjustable Versus Fixed Spray: Fixed Spray
 Depth/Width: 6"
 Diameter Of Head: 3 1/16"
 Fittings Hole Diameter: 1 3/8"
 Handshower Spray Hose Length: 59"
 Height: 9 1/2"
 Inlet Connection Size: 1/2"
 Inlet Connection Type: 22mm Copper Compression
 Installation Type: Wall Mounted
 Integrated Diverter: N
 Length: 14"
 Pivot: N
 Primary Material: Brass
 Restricted Maximum Flow Rate: 2.5 gpm
 Suggested Application: Bath
 Water Pressure Maximum: 75.0 psi
 Water Pressure Minimum: 20.0 psi
 Water Pressure Recommended: 45.0 psi

INSPIRATION

Rooted in classical Edwardian design, Easton is our most expansive collection—offering a comprehensive family of pieces that bring polished detail and timeless tradition to any setting. Revered for its exquisite proportions and impeccable scale, Easton is a trusted choice among designers.

CODES & STANDARDS

ASME A112.18.1/CSA B125.1, Waterworks Handshowers use check valves compliant to ASME A112.18.3 for backflow protection. State of MA

PRODUCT FEATURES

Optional handle materials include porcelain and semi-precious stones.

The manufacturing process encompasses casting, turning, forging, hand-fitting and hand polishing.

The pillowed propeller on the cross handle makes the product fit comfortably in the hand.


Standard flow rate is 2.5gpm (9.5 L/min). Also available in high efficient flow options. Contact your sales associate or call 1 (800) 899-6757 for details.

CERTIFICATIONS




PRODUCT (NOTES)

Easton Classic Handshower with Diverter and White Porcelain Lever Handle

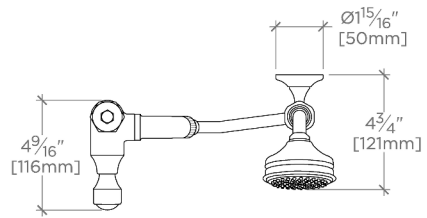


TOP VIEW

SCALE: 1/2"=1'-0"

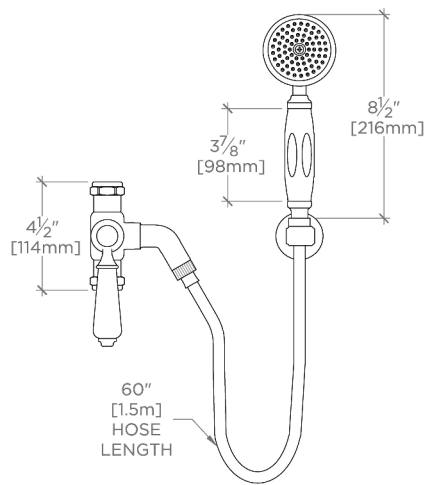

FRONT VIEW

SCALE: 1/2"=1'-0"

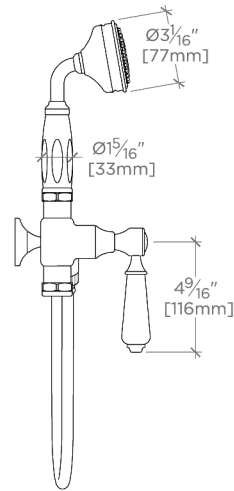

SIDE VIEW

SCALE: 1/2"=1'-0"