

BOND

BKM47D

Bond Union Series One Hole Gooseneck Bar Faucet with Enamel
Guilloche Lines Lever Handle



TECHNICAL DETAILS

Deck Thickness Maximum: 1 1/2"
Deck Thickness Minimum: 1/4"
Fittings Hole Diameter: 1 3/8"
Handle Turn Angle: Quarter Turn
Inlet Connection Size: 3/8"
Inlet Connection Type: Compression Connection Hoses
Restricted Maximum Flow Rate: 1.2 gpm
Spout Swivel: Y
Valve Material: Ceramic
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 25.0 psi
Water Pressure Recommended: 45.0 psi

INSPIRATION

Modern designs infused with rare soul and artistry. Explore our wide range of Bond bath and kitchen elements, from fittings to fixtures to hardware.

PRODUCT FEATURES

Lever Handle

Handle rotates toward the front to prevent contact with backsplash

Features Guilloche Lines combined with Enamel Handle


Stocked in Nickel and Brass

Available in 1.2gpm (4.5L/min) flow rate

BOND


BKM47D

Bond Union Series One Hole Gooseneck Bar Faucet with Enamel
Guilloche Lines Lever Handle



TOP VIEW



SCALE: 1 1/2"=1'-0"

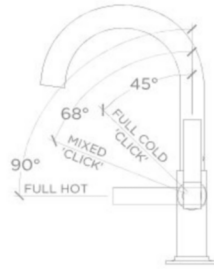


HANDLE OPERATION

SCALE: 1 1/2"=1'-0"

NOTE:
ADAPTER AND GASKET (x2)
INCLUDED - INTERNATIONAL
USE ONLY




NOT TO SCALE

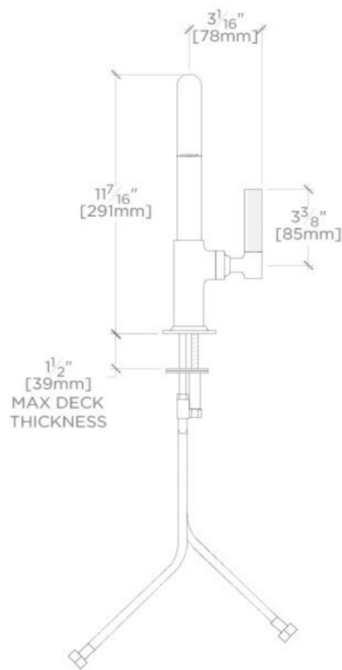

FRONT VIEW

SCALE: 1 1/2"=1'-0"

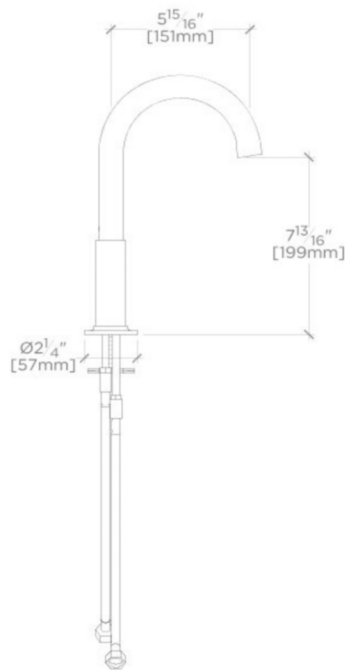

SIDE VIEW

SCALE: 1 1/2"=1'-0"