
Flyte

Flyte Volume Control with Cross Handle

FLVC40

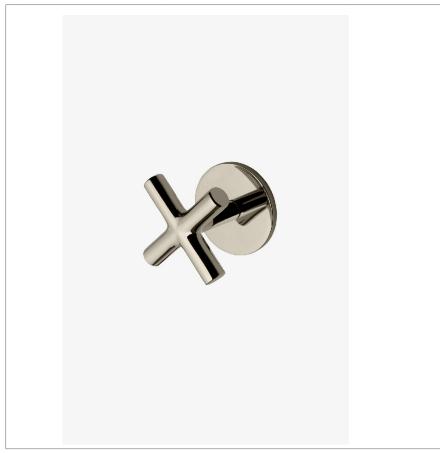

TECHNICAL DETAILS

ADA Compliance: Yes Depth/Width: 59 mm Escutcheon Primary Material: Brass Fittings Hole Diameter: 35 mm Height: 60 mm Integrated Diverter: N Integrated Spray: N Length: 60 mm Number Of Handles: One Pivot: N Primary Material: Brass Spout Swivel: N Spray Included In Unit: N Suggested Application: Bath

SHOWN IN FLYTE VOLUME CONTROL WITH CROSS HANDLE | FLVC40

INSPIRATION

Pure Modernism. Like minimalist works of art, the elegant proportions of these light, fluid elements bring sculptural reference to a room.

CODES & STANDARDS ASME A112.18.1/CSA B125.1, State of MA

PRODUCT FEATURES

Cross Handles

Used to Control Water Flow to a Single Waterway Outlet

Stocked in Chrome, Nickel, Brass and Matte Black

Requires rough valve, Sold separately: GUVC18/GUVC19 or GUVC16/GUVC17

CERTIFICATIONS



PRODUCT (NOTES)

Required 1/2" valve rough Hot -GUVC18 or Cold -GUVC19, sold separately.

Flyte Flyte Volume Control with Cross Handle

