


INSTALLATION GUIDELINES

ROBE HOOK


EASTON DOUBLE HOOK

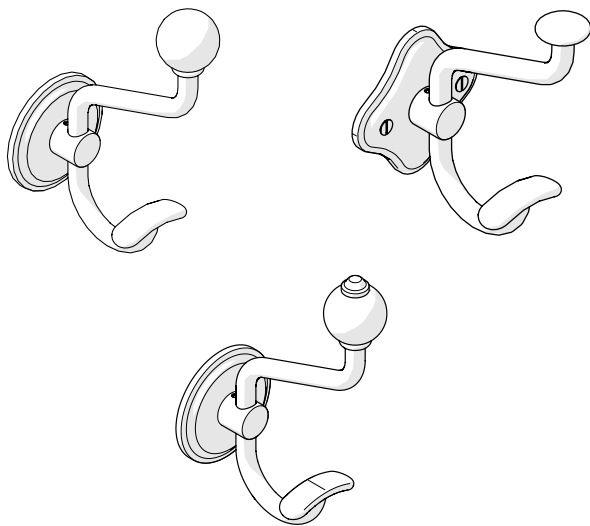


STYLES		
EARH02 [SHOWN]	ERH02C [SHOWN]	ERH02B [SHOWN]
ERH02R	ERH02V	ERH02W

IMPORTANT:

- To ensure this product is installed properly, you must read and follow these guidelines.
- The owner/user of this product must keep this information for further reference.
- This product must be installed by a professional licensed contractor. Inspect this product to ensure you have all the parts required for proper installation.
- DRYWALL ANCHORS for a typical drywall installation are provided. Do **NOT** use the ANCHORS if mounting directly onto wood blocking or a stud.
- If further assistance is required, please contact Product Support at 1-800-927-2120 Monday through Friday, 8am - 6pm EST.
- Refer to the separate Service Parts Documents for available replacement parts.

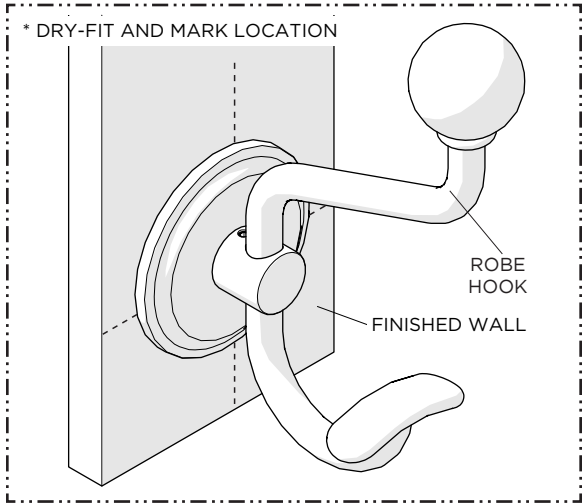


1. Dry-fit the ROBE HOOK to the FINISHED WALL and mark the ideal location.

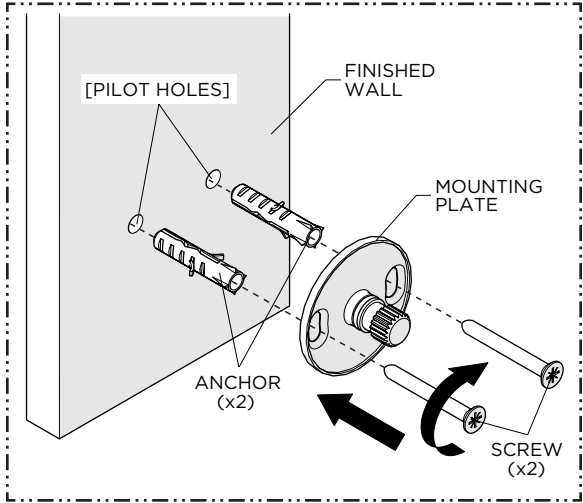


3. Using the previous marks as a reference, install the MOUNTING PLATE using the ANCHORS, if necessary, and SCREWS provided.

NOTE: Ensure the MOUNTING PLATE is in the proper orientation.

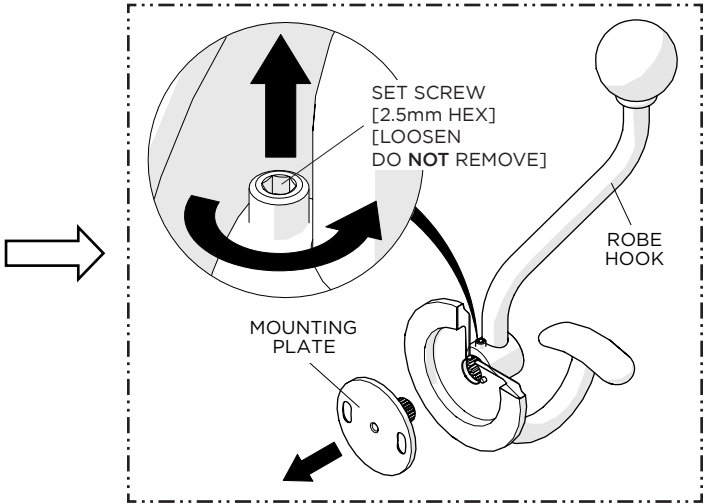

2. Loosen, but do **NOT** remove, the SET SCREW on the top of the ROBE HOOK END using a 2.5mm HEX and remove the MOUNTING PLATE.

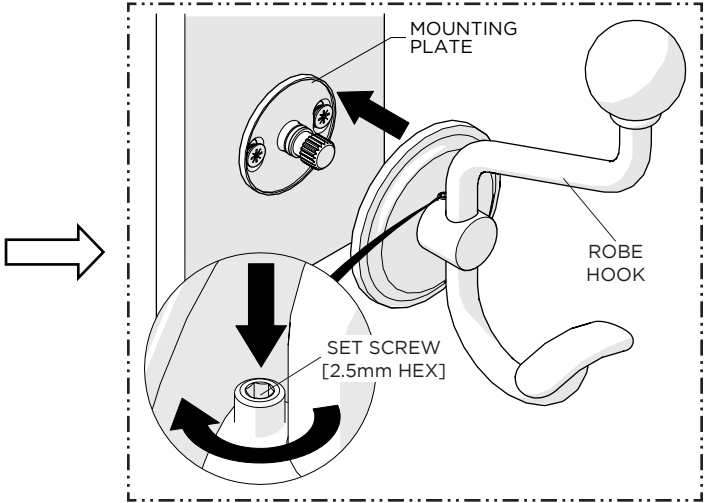

4. Slide the ROBE HOOK onto the MOUNTING PLATE then thread and securely tighten the SET SCREW using 2.5mm HEX.