


Flyte

FLTS80

Flyte Wall Mounted Tub Spout

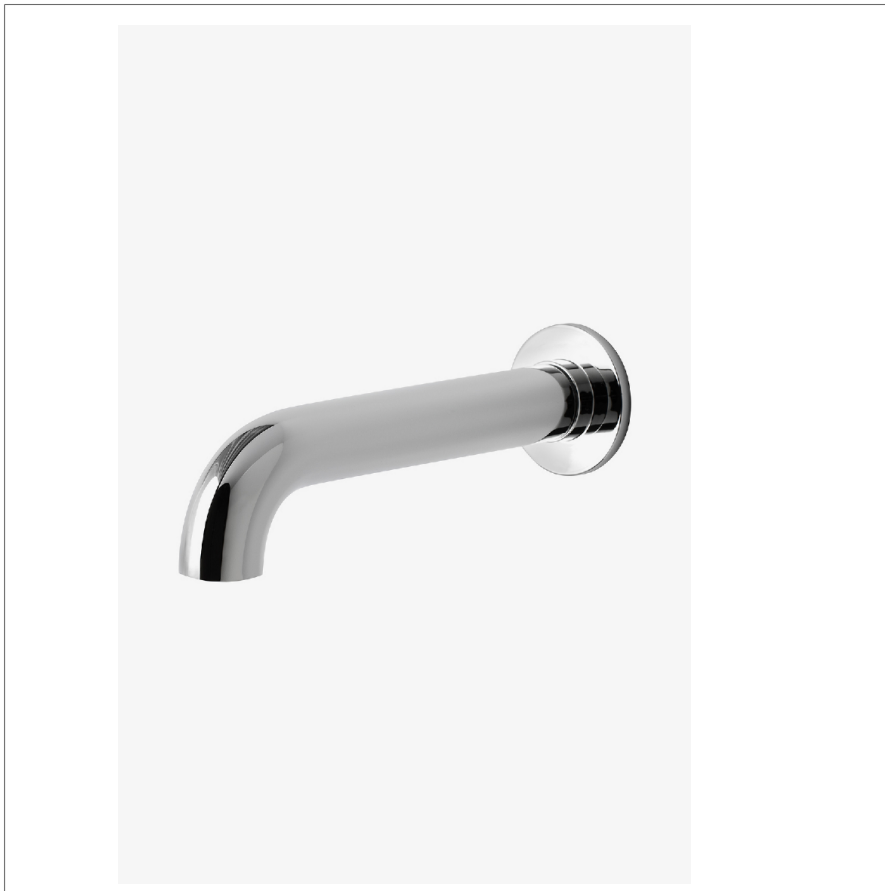

SHOWN IN FLYTE WALL MOUNTED TUB SPOUT | FLTS80

TECHNICAL DETAILS

ADA Compliance: Yes
 Adjustable Versus Fixed Spray: Fixed Spray
 Depth/Width: 202 mm
 Escutcheon Primary Material: Brass
 Fittings Hole Diameter: 32 mm
 Height: 70 mm
 Inlet Connection Size: 1/2"
 Inlet Connection Type: Female NPT
 Installation Type: Wall Mounted
 Integrated Diverter: N
 Integrated Spray: N
 Length: 60 mm
 Number Of Holes: One Hole
 Pivot: N
 Primary Material: Brass
 Spout Swivel: N
 Spray Included In Unit: N
 Suggested Application: Bath
 Water Pressure Maximum: 6.0 bar
 Water Pressure Minimum: 1.5 bar
 Water Pressure Recommended: 3.0 bar

INSPIRATION

Pure Modernism. Like minimalist works of art, the elegant proportions of these light, fluid elements bring sculptural reference to a room.

CODES & STANDARDS

ASME A112.18.1/CSA B125.1, CEC, State of MA

PRODUCT FEATURES

Wall Mounted

Stocked in Chrome, Nickel, Brass and Matte Black

Unrestricted Flow for Tub Spout

CERTIFICATIONS




PRODUCT (NOTES)


Flyte

FLTS80


Flyte Wall Mounted Tub Spout

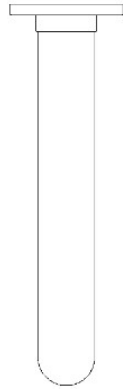

TOP VIEW SCALE: 3"=1'-0"



FRONT VIEW SCALE: 3"=1'-0"

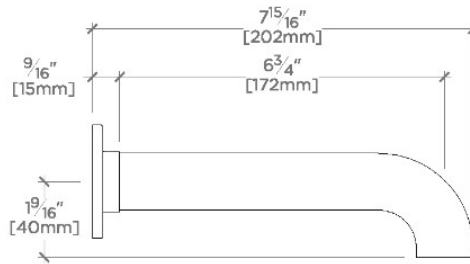

SIDE VIEW SCALE: 3"=1'-0"