

Bond

BKM47D

Bond Union One Hole Gooseneck Bar Faucet with Enamel
Guilloche Lines Lever Handle



SHOWN IN BOND UNION ONE HOLE GOOSENECK BAR FAUCET WITH ENAMEL GUILLOCHE LINES LEVER HANDLE | BKM47D

TECHNICAL DETAILS

ADA Compliance: Yes
 Deck Thickness Maximum: 38 mm
 Deck Thickness Minimum: 6 mm
 Fittings Hole Diameter: 35 mm
 Handle Turn Angle: Quarter Turn
 Inlet Connection Size: 3/8"
 Inlet Connection Type: Compression Connection
 Hoses
 Restricted Maximum Flow Rate: 4.5 liters/min
 Spout Swivel: Y
 Valve Material: Ceramic
 Water Pressure Maximum: 6.0 bar
 Water Pressure Minimum: 1.5 bar
 Water Pressure Recommended: 3.0 bar

INSPIRATION

Bond draws inspiration from the Aesthetic Movement, rare vintage lighters, and modern industrial design. The result is a contemporary collection with a soulful quality that inhabits the full range of modern style, from austere minimalism to warm contemporary.

CODES & STANDARDS

BKM47DX, NSF/ANSI/CAN 61:Q < 1, NSF/ANSI/CAN 372, ASME A112.18.1/CSA B125.1, CEC, State of MA, NOM-012, WRAS

PRODUCT FEATURES

Lever Handle

Handle rotates toward the front to prevent contact with backsplash

Features Guilloche Lines combined with Enamel Handle

Stocked in Nickel and Brass

Available in 1.2gpm (4.5L/min) flow rate

CERTIFICATIONS




PRODUCT (NOTES)


Bond

BKM47D

Bond Union One Hole Gooseneck Bar Faucet with Enamel
Guilloche Lines Lever Handle





TOP VIEW SCALE: 1 1/2"=1'-0"




HANDLE OPERATION SCALE: 1 1/2"=1'-0"


NOTE:
ADAPTER AND GASKET (x2)
INCLUDED INTERNATIONAL USE
ONLY



ADAPTER NOT TO SCALE

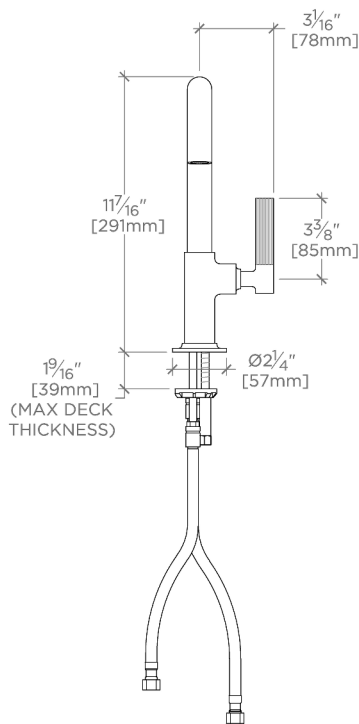

FRONT VIEW SCALE: 1 1/2"=1'-0"

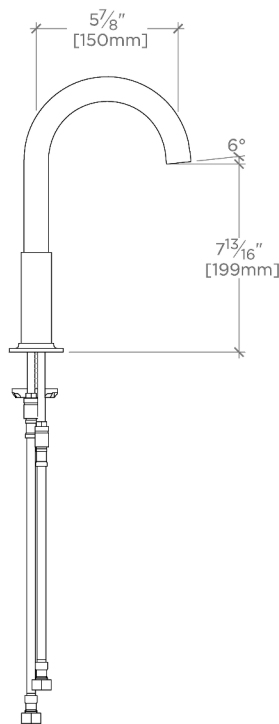

SIDE VIEW SCALE: 1 1/2"=1'-0"