



ESTB. 1978

WATERWORKS

Camino



Incorporating the inherent texture and natural characteristics of volcanic basalt, Camino is suited to multiple applications across wet and dry environments. A bold, expressive palette brings together vibrant color and material depth, while the glaze variation lends a distinct, organic character.



ESTB. 1978

WATERWORKS

Camino

FIELD TILE



FIELD TILE 2" X 4"
CIF024



FIELD TILE 2" X 8"
CIF028



FIELD TILE 4" X 4"
CIF044



FIELD TILE 4" X 8"
CIF048



FIELD TILE 8" X 8"
CIF088



ESTB. 1978

WATERWORKS

Camino

PALETTE



HICKORY

V5



CREMINI

V5




NETTLE

V5




SONORA

V5



OASIS

V5



BLUE CORAL

V5



OCEANIC

V5


^A See variation chart



ESTB. 1978

WATERWORKS

Camino

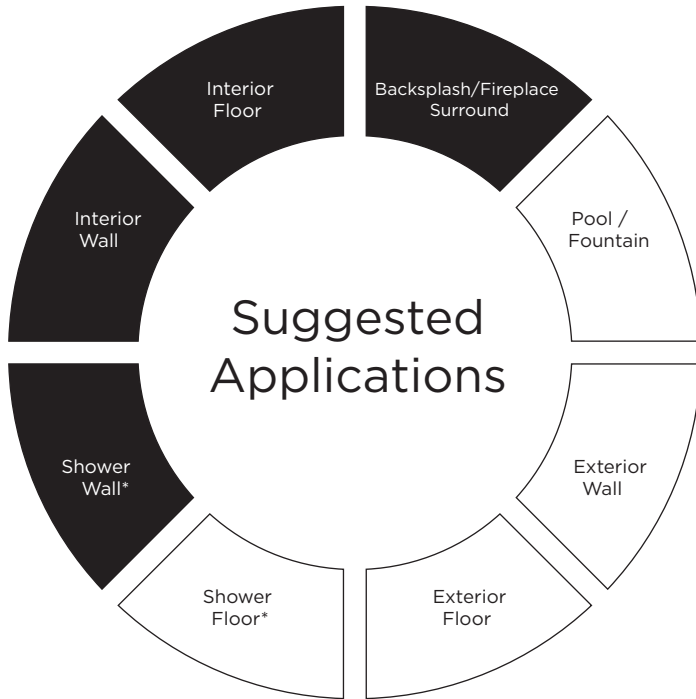

Recommended Use




Not Recommended Use

Application Notes


* Suitable for use in wet environments (Walls only) if properly installed, sealed, and maintained

Variation Level

V1




V2




V3



V4



V5



1. MINIMAL, IF ANY COLOR VARIATION

2. SLIGHT COLOR VARIATION CAN BE EXPECTED

3. A MEDIUM RANGE OF COLOR VARIATION IS TYPICAL; DARKER AND LIGHTER TONES ARE EVIDENT

4. CONSIDERABLE COLOR VARIATION IS TYPICAL; FROM DARKS TO LIGHTS AND SOME TONE CHANGES

5. EXTREME COLOR VARIATION CAN BE EXPECTED - THE RANGE IS OFTEN DIFFERING BUT COMPLEMENTARY

Thickness



*Nominal: +/- 1/8"

Suggested Grout Lines

1/8"

Installation / Maintenance

- WATERWORKS ASSUMES NO RESPONSIBILITY FOR INSTALLATION
- Installation constitutes acceptance.
- Tile should be installed by a licensed and experienced tile setter.
- Refer to TCNA (Tile Council of North America) or ANSI standards for installation guidelines.
- All tile must be inspected PRIOR to installation.
- Dry lay tile prior to installation to allow for blending of color variation.
- Tile should be sealed PRIOR to grouting. Dark grout can stain crackle tiles.
- Waterworks recommends a grouted test panel prior to installation to understand final appearance of grouted material.
- Seal grout joints after installation and maintain regularly.