



ESTB. 1978

WATERWORKS

Terranostra



Handmade in Italy using ancient techniques, Terranostra brings natural clay's expressive character to wall and floor installations. Choose from two finishes — Naturale, smooth with subtle movement, and Sabbiato, raw and deeply textural.



ESTB. 1978

WATERWORKS

Terranostra

FIELD TILE



FIELD TILE 4" x 4" x 3/4"
TNF044



FIELD TILE 4" x 8" x 3/4"
TNF048



FIELD TILE 8" x 8" X 3/4"
TNF088



FIELD TILE 8" x 16" x 1"
TNF816



FIELD TILE 16" x 16" x 1"
TNF616



ESTB. 1978

WATERWORKS

Terranostra

PALETTE



NEVI NATURALE V4



NEVI SABBATO V4



IMPALA NATURALE V4



IMPALA SABBATO V4



CHAI NATURALE V4



CHAI SABBATO V4



FORTO NATURALE V4



FORTO SABBATO V4



WHITE SAGE NATURALE V4



WHITE SAGE SABBATO V4



GRIGIO NATURALE V4



GRIGIO SABBATO V4



CARBON NATURALE V4



CARBON SABBATO V4


^A See variation chart
JULY 2026



ESTB. 1978

WATERWORKS

Terranostra

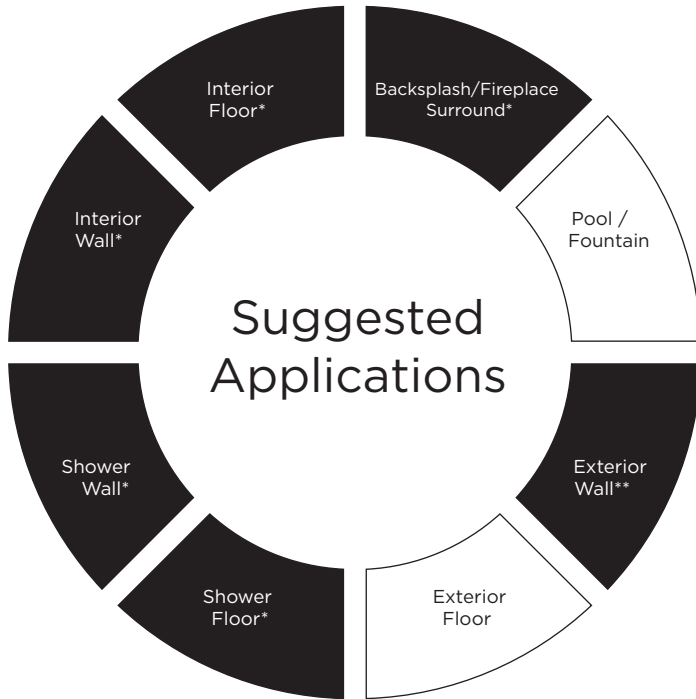

Recommended Use




Not Recommended Use

Application Notes


- * Suitable for use if properly installed, sealed, and waxed
- ** Suitable for use in Exterior wall if properly installed and sealed. No wax needed

Variation Level

V1




V2



V3



V4



V5



1. MINIMAL, IF ANY COLOR VARIATION
2. SLIGHT COLOR VARIATION CAN BE EXPECTED
3. A MEDIUM RANGE OF COLOR VARIATION IS TYPICAL; DARKER AND LIGHTER TONES ARE EVIDENT
4. CONSIDERABLE COLOR VARIATION IS TYPICAL; FROM DARKS TO LIGHTS AND SOME TONE CHANGES
5. EXTREME COLOR VARIATION CAN BE EXPECTED - THE RANGE IS OFTEN DIFFERING BUT COMPLEMENTARY

Thickness



3/4" to 1"*

*Nominal: +/- 1/8"

Suggested Grout Lines

1/8"

Installation / Maintenance

- WATERWORKS ASSUMES NO RESPONSIBILITY FOR INSTALLATION
- Installation constitutes acceptance.
- Tile should be installed by a licensed and experienced tile setter.
- Refer to TCNA (Tile Council of North America) or ANSI standards for installation guidelines.
- All tile must be inspected PRIOR to installation.
- Dry lay tile prior to installation to allow for blending of color variation.
- Tile should be sealed PRIOR to grouting. Dark grout can stain crackle tiles.
- Waterworks recommends a grouted test panel prior to installation to understand final appearance of grouted material.
- Seal grout joints after installation and maintain regularly.
- Terracotta requires waxing as part of its installation and maintenance. Please consult your installer for specific waxing recommendations and care instructions