### BOND

## BXT17D

Bond Union Series Wall Mounted Exposed Tub Filler with Handshower and Enamel Guilloche Lines Lever Handles



# TECHNICAL DETAILS

Diameter Of Legs Tubes: 1 1/4" Fittings Hole Diameter: 1 3/8" Handle Spread Maximum: 8" Handle Spread Minimum: 8" Handle Turn Angle: Quarter Turn Handshower Spray Hose Length: 59" Inlet Connection Size: 3/4" Inlet Connection Type: Male NPT Inlet Supply Spread Maximum: 12 1/2" Inlet Supply Spread Minimum: 12 1/2" Integrated Diverter: Y Number Of Holes: Two Hole Primary Material: Brass Spout Swivel: N Spray Included In Unit: Y Valve Material: Ceramic Water Pressure Maximum: 85.0 psi Water Pressure Minimum: 20.0 psi Water Pressure Recommended: 45.0 psi

SHOWN IN BOND UNION SERIES WALL MOUNTED EXPOSED TUB FILLER WITH HANDSHOWER AND ENAMEL GUILLOCHE LINES LEVER HANDLES | BXT17D

#### **INSPIRATION**

Modern designs infused with rare soul and artistry. Explore our wide range of Bond bath and kitchen elements, from fittings to fixtures to hardware.

### CODES & STANDARDS

ASME A112.18.1/CSA B125.1, CEC, State of MA

**PRODUCT FEATURES** 

Lever Handles

Diverter handle allows bather to move water from spout to handshower. Handshower features 2-1/8" head with rubber nozzles. Features Guilloche Lines combined with Enamel Handle

Stocked in Nickel and Brass

Unrestricted flow for tub spout. Handshower available in 1.75gpm (6.6L/min) flow rate

CERTIFICATIONS




PRODUCT (NOTES)


### BOND

## BXT17D

Bond Union Series Wall Mounted Exposed Tub Filler with Handshower and Enamel Guilloche Lines Lever Handles

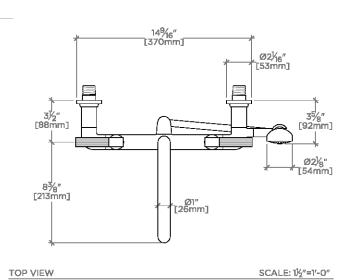



\* 2 ADAPTERS SUPPLIED INTERNATIONAL USE ONLY



BSPP ADAPTER <sup>†</sup>

NOT TO SCALE

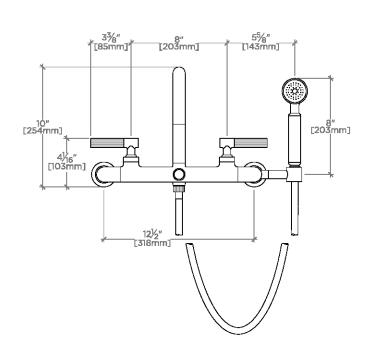

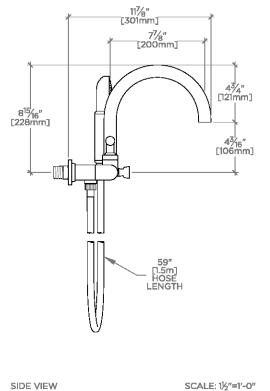

FRONT VIEW

SCALE: 1½"=1'-0"

SCALE: 1½"=1'-0"