

DASH

DSXS20

Dash Exposed Thermostatic Shower System with 8" Shower Head and Metal Cross Handles



SHOWN IN DASH EXPOSED THERMOSTATIC SHOWER SYSTEM WITH 8" SHOWER HEAD AND METAL CROSS HANDLES | DSXS20

TECHNICAL DETAILS

ADA Compliance: Yes
 Adjustable Versus Fixed Spray: Fixed Spray
 Diameter Of Head: 7 3/4"
 Diameter Of Legs Tubes: 1 1/8"
 Escutcheon Primary Material: Brass
 Fittings Hole Diameter: 1 1/8"
 Flow Restriction Options: 2.5, 2.0, 1.75, 1.5
 Handle Spread Maximum: 5 11/16"
 Handle Spread Minimum: 5 11/16"
 Handle Turn Angle: Quarter Turn
 Handshower Spray Hose Length: 59"
 Inlet Connection Size: 3/4"
 Inlet Connection Type: Copper Compression
 Inlet Supply Spread Maximum: 11 5/8"
 Inlet Supply Spread Minimum: 11 1/8"
 Installation Type: Wall Mounted
 Integrated Diverter: N
 Integrated Spray: N
 Number Of Handles: Two
 Number Of Holes: Two Hole
 Pivot: Y
 Primary Material: Brass
 Suggested Application: Bath
 Valve Material: Wax Element
 Water Pressure Maximum: 85.0 psi
 Water Pressure Minimum: 20.0 psi
 Water Pressure Recommended: 45.0 psi

INSPIRATION

An imaginative blend of art and function, Dash pays homage to design elements of the 1930s with pared-down shapes, softened curves and minimal details.

CODES & STANDARDS

CEC

PRODUCT FEATURES

Features an intergrated thermostatic shut-off valve

The Shower Riser is designed to be field cut to accommodate varying shower heights

Stocked in Nickel, Chrome, Unlacquered Brass, and Matte Nickel finishes

Standard flow rate is 2.5gpm (9.5 L/min). Also available in high efficient flow options. Contact your sales associate or call 1 (800) 899-6757 for details.


CERTIFICATIONS

PRODUCT (NOTES)

DASH


DSXS20

Dash Exposed Thermostatic Shower System with 8" Shower Head and Metal Cross Handles

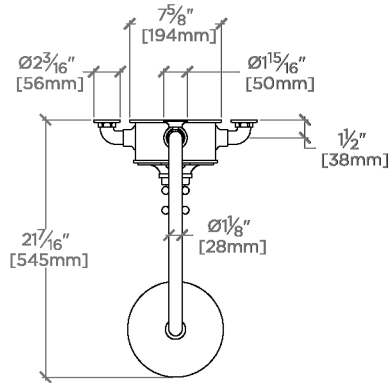


TOP VIEW

SCALE: $\frac{3}{4}"=1'-0"$

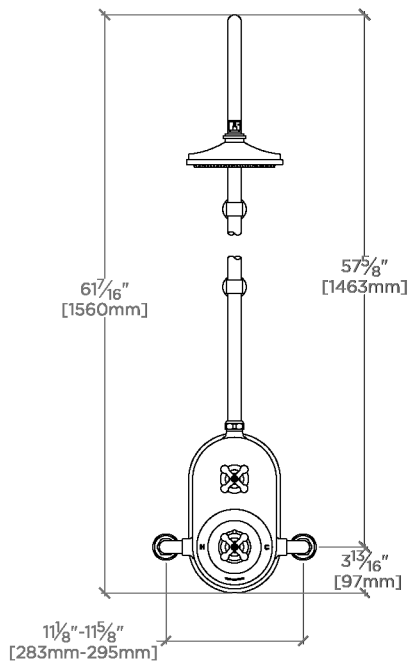

FRONT VIEW

SCALE: $\frac{3}{4}"=1'-0"$

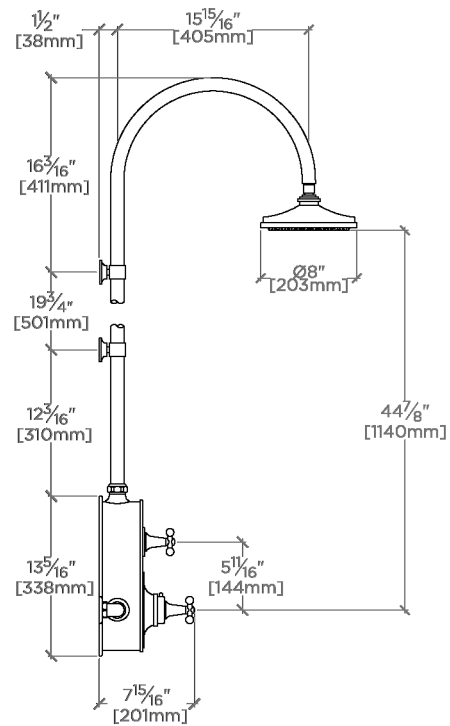

SIDE VIEW

SCALE: $\frac{3}{4}"=1'-0"$