

REGULATOR

RGXT40

Regulator Exposed Deck Mounted Tub Filler with Handshower and Black Wheel Handles



TECHNICAL DETAILS

Adjustable versus Fixed Spray: Fixed
Deck Thickness Maximum: 64 mm
Deck Thickness Minimum: 6 mm
Fittings Hole Diameter: 35 mm
Flow Restriction Options: 2.5, 2.0, 1.75, 1.5, 0.92
Handle Turn Angle: Quarter Turn
Handshower / Spray Hose Length: 1.5 m
Depth / Width: 300 mm
Height: 505 mm
Inlet Connection Size: 3/4"
Inlet Connection Type: Male BSPP
Inlet Supply Spread Maximum: 203 mm
Inlet Supply Spread Minimum: 203 mm
Integrated Diverter: Y
Integrated Spray: Y
Length: 314 mm
Primary Material: Brass
Suggested Application: Bath
Water Pressure Maximum: 6.0 bar
Water Pressure Minimum: 1.5 bar
Water Pressure Recommended: 3.0 bar

INSPIRATION

A play on industrial controls from the early 1900s, when pride was lavished on parts. Translated to handcrafted, fittings project rugged beauty through powerful, detailed shapes.

PRODUCT FEATURES

Matte Black Wheel

Includes Required Unions for Mounting

Exposed Tub Fillers feature a unique shut-off and diverter valve inside the decorative valve body. Handshower features anti-drip technology.


Stocked in Nickel, Chrome and Unlacquered Brass

Stocked in 2.5gpm (9.5 L/min) and 1.75gpm (6.6 L/min) for handshower. State of California requires 1.75gpm (6.6 L/min) to comply with their water conservation requirements. Other flow options are available to order, contact your sales associate or call 1 (800) 899-6757 for details.

REGULATOR


RGXT40

Regulator Exposed Deck Mounted Tub Filler with Handshower and Black Wheel Handles

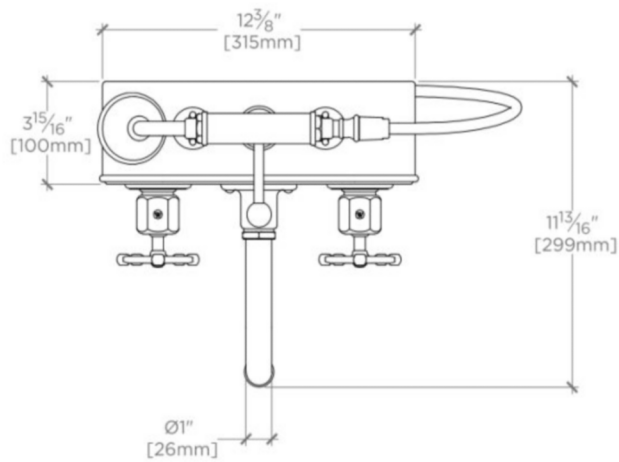


TOPVIEW

SCALE: 1 1/2"=1'-0"

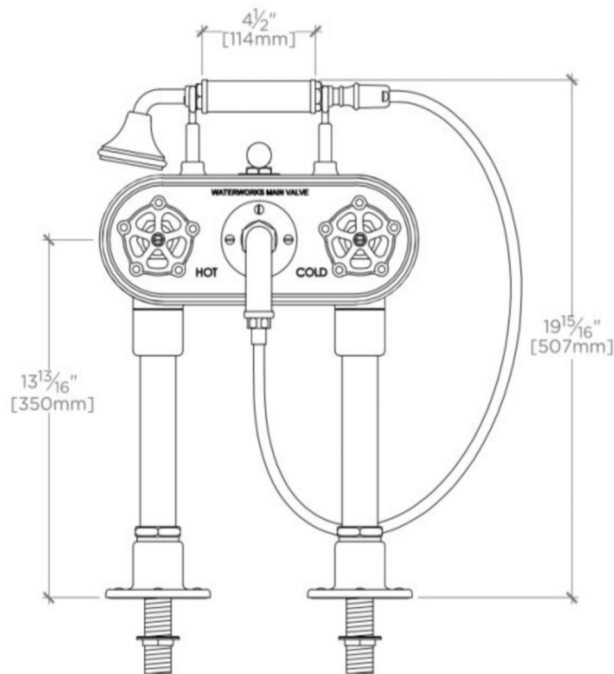

FRONT VIEW

SCALE: 1 1/2"=1'-0"

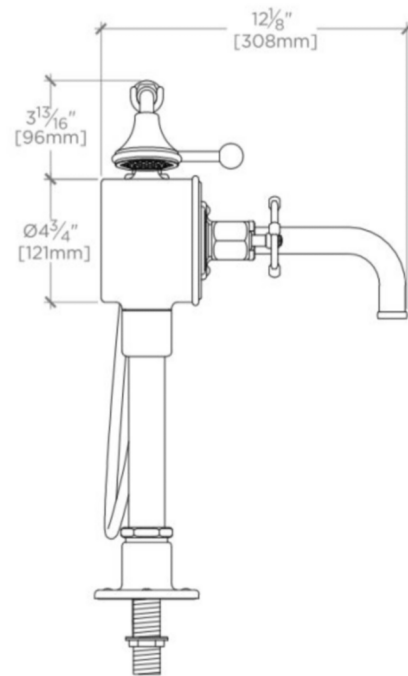

SIDE VIEW

SCALE: 1 1/2"=1'-0"