

Universal

GU3TDV

Universal Three Way Diverter Valve for Thermostatic Shower Systems



SHOWN IN UNIVERSAL THREE WAY DIVERTER VALVE FOR THERMOSTATIC SHOWER SYSTEMS | GU3TDV

TECHNICAL DETAILS

Fittings Hole Diameter: 51 mm
Handle Turn Angle: Full Turn
Inlet Connection Size: 1/2"
Inlet Connection Type: Male G/BSPP
Outlet Connection Size: 1/2"
Outlet Connection Type: Male G/BSPP
Primary Material: Brass
Valve Material: Ceramic
Water Pressure Maximum: 6.0 bar
Water Pressure Minimum: 1.5 bar
Water Pressure Recommended: 3.0 bar

INSPIRATION

Our Universal collection features timeless designs complementing any of our Waterworks. With a wide range of product, from fittings to accessories, Universal adds exquisite proportion and balance to any environment.

CODES & STANDARDS

PRODUCT FEATURES

For use with Thermostatic systems with three-way diverter valve trims

1/2" NPT male inlet and outlets with 60 degree turn functionality

16 gpm (gallons per minute) unrestricted maximum flow at 60 psi

Custom tile guard ensures precise tiling, while providing accessibility in servicing the valve.

Made in Europe of Brass Construction

CERTIFICATIONS


PRODUCT (NOTES)

Universal


GU3TDV

Universal Three Way Diverter Valve for Thermostatic Shower Systems


ADAPTER(S) PACKAGED SEPARATELY		
ADAPTER	DESCRIPTION	QTY
UNUK03	1/2" NPT FEMALE x 1/2" MALE BSPP ADAPTER	4

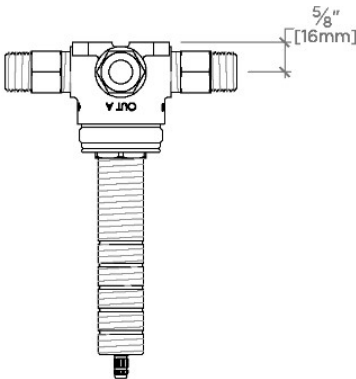

TOP VIEW SCALE: 3"=1'-0"

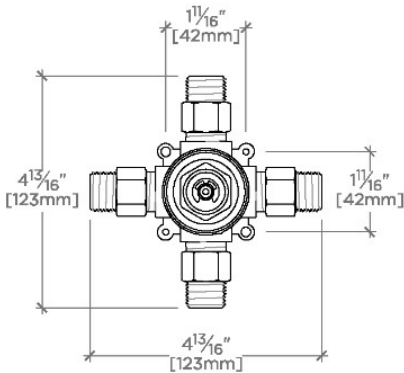

FRONT VIEW SCALE: 3"=1'-0"



SIDE VIEW SCALE: 3"=1'-0"