
### DASH

# DSXS50

Dash Exposed Thermostatic Shower System with 8" Shower Head, Handshower, Metal Lever Diverter Handle and Metal Cross Handles

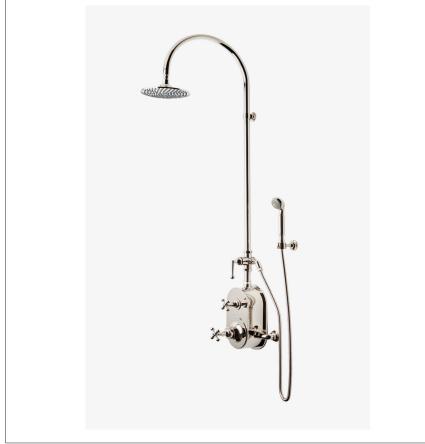

#### SHOWN IN DASH EXPOSED THERMOSTATIC SHOWER SYSTEM WITH 8" SHOWER HEAD, HANDSHOWER, METAL LEVER

#### **INSPIRATION**

A blend of art and function, Dash pays homage to design elements of the 1930s with pared-down shapes, softened curves and minimal details.

#### **PRODUCT FEATURES**

Features an intergrated thermostatic shut-off valve

The Shower Riser is designed to be field cut to accommodate varying shower heights

The Exposed diverter body can be installed with the handshower elbow on the right or the left

Stocked in Nickel, Chrome, Unlacquered Brass, and Matte Nickel finishes

Standard flow rate is 2.5gpm (9.5 L/min). Also available in high efficient flow options. Contact your sales associate or call 1 (800) 899-6757 for details.

### TECHNICAL DETAILS

Adjustable versus Fixed Spray: Fixed Spray Diameter of Head: 197 mm Diameter of Legs / Tubes: 29 mm Escutcheon Primary Material: Brass Fittings Hole Diameter: 29 mm Flow Restriction Options: Shower Head: 2.5, 2.0, 1.75, 1.5 and Handshower: 2.5, 2.2, 2.0, 1.75, 1.5, 1.2, 0.92 Handle Spread Maximum: 144 mm Handle Spread Minimum: 144 mm Handle Turn Angle: Quarter Turn Handshower / Spray Hose Length: 1.5 m Inlet Connection Size: 3/4" Inlet Connection Type: Copper Compression Inlet Supply Spread Maximum: 295 mm Inlet Supply Spread Minimum: 283 mm Installation Type: Wall Mounted Integrated Diverter: Y Integrated Spray: N Number of Handles: Three Number of Holes: Two Hole Pivot: Y Primary Material: Brass Spray Included in Unit: Y Suggested Application: Bath Valve Material: Wax Element Water Pressure Maximum: 6.0 bar Water Pressure Minimum: 1.5 bar Water Pressure Recommended: 3.0 bar

## DASH

### DSXS50

Dash Exposed Thermostatic Shower System with 8" Shower Head, Handshower, Metal Lever Diverter Handle and Metal Cross Handles

