

HENRY

HNA820

Henry 20" Wall Mounted Gooseneck Shower Arm



SHOWN IN HENRY 20" WALL MOUNTED GOOSENECK SHOWER ARM | HNA820

TECHNICAL DETAILS

Fittings Hole Diameter: 1 1/4"
 Inlet Connection Size: 1/2"
 Inlet Connection Type: Female Straight Threads with Rubber Washer
 Integrated Diverter: N
 Outlet Connection Size: 1/2"
 Outlet Connection Type: MALE NPT
 Primary Material: Brass
 Water Pressure Maximum: 85.0 psi
 Water Pressure Minimum: 20.0 psi
 Water Pressure Recommended: 45.0 psi

INSPIRATION

Influenced by the connection of industry and art Henry easily transitions between modern, traditional, utilitarian and classic settings.

CODES & STANDARDS

HNA820X, ASME A112.18.1/CSA B125.1, CEC(1.5GPM & 1.75GPM Only), WaterSense(1.5GPM, 1.75GPM & 2.0GPM Only), DOE

PRODUCT FEATURES

Made of Brass

Shower arms can be partnered with a variety of showerheads (sold separately)

Stocked in Brass, Chrome, Nickel and Dark Nickel

CERTIFICATIONS




PRODUCT (NOTES)


HENRY

HNA820


Henry 20" Wall Mounted Gooseneck Shower Arm

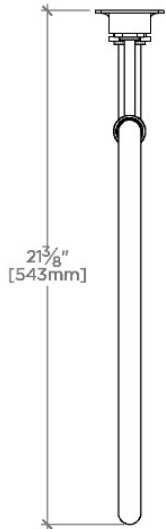

TOP VIEW SCALE: 1/2"=1'-0"

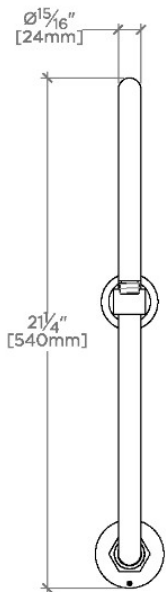

FRONT VIEW SCALE: 1/2"=1'-0"

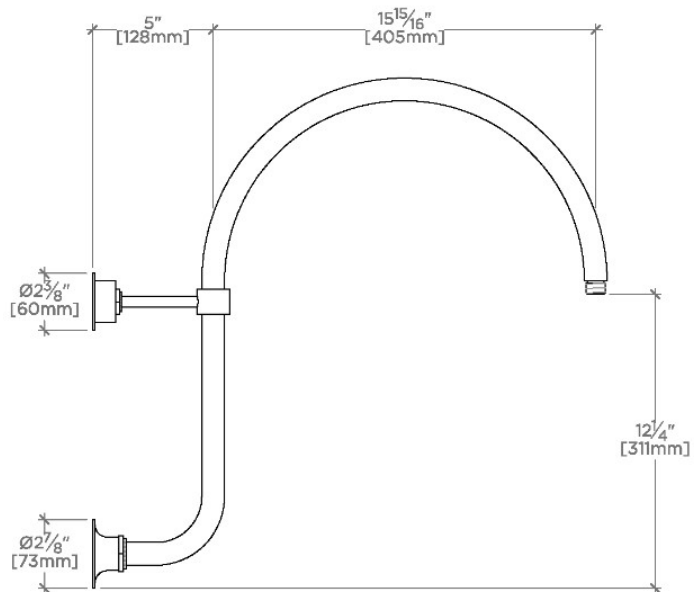

SIDE VIEW SCALE: 1/2"=1'-0"