

UNIVERSAL

USA820

Universal 20" Wall Mounted Gooseneck Shower Arm



SHOWN IN UNIVERSAL 20" WALL MOUNTED GOOSENECK SHOWER ARM | USA820

TECHNICAL DETAILS

Fittings Hole Diameter: 1 1/4"
 Inlet Connection Size: 1/2"
 Inlet Connection Type: Female Straight Threads with Rubber Washer
 Integrated Diverter: N
 Outlet Connection Size: 1/2"
 Outlet Connection Type: MALE NPT
 Primary Material: Brass
 Water Pressure Maximum: 85.0 psi
 Water Pressure Minimum: 20.0 psi
 Water Pressure Recommended: 45.0 psi

INSPIRATION

Featuring enduring designs that complement any Waterworks element, this collection spans fittings to accessories, bringing exquisite proportion and balance to any environment.

CODES & STANDARDS

USA820X, ASME A112.18.1/CSA B125.1, State of MA, WRAS

PRODUCT FEATURES

Made of Brass

Shower arms can be partnered with a variety of showerheads (sold separately)

Stocked in Brass, Chrome and Nickel

CERTIFICATIONS




PRODUCT (NOTES)


UNIVERSAL

USA820


Universal 20" Wall Mounted Gooseneck Shower Arm

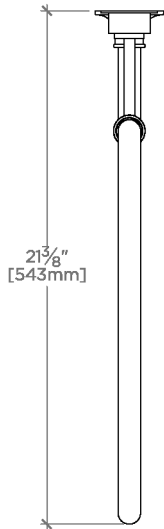

TOP VIEW SCALE: 1 1/2"=1'-0"

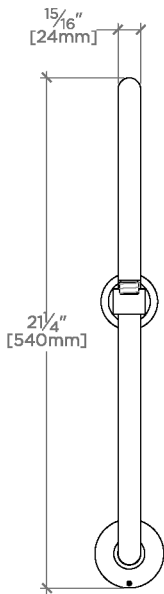

FRONT VIEW SCALE: 1 1/2"=1'-0"

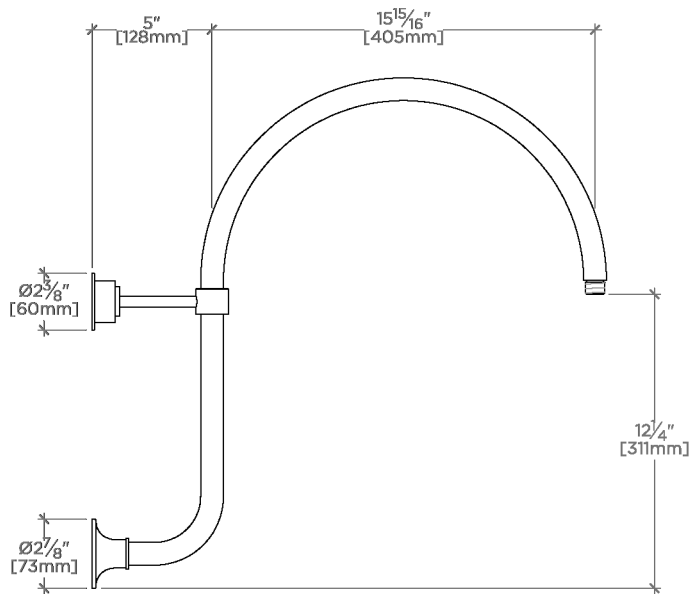

SIDE VIEW SCALE: 1 1/2"=1'-0"