


LUDLOW

LDHS25

Ludlow Volta Handshower on Hook

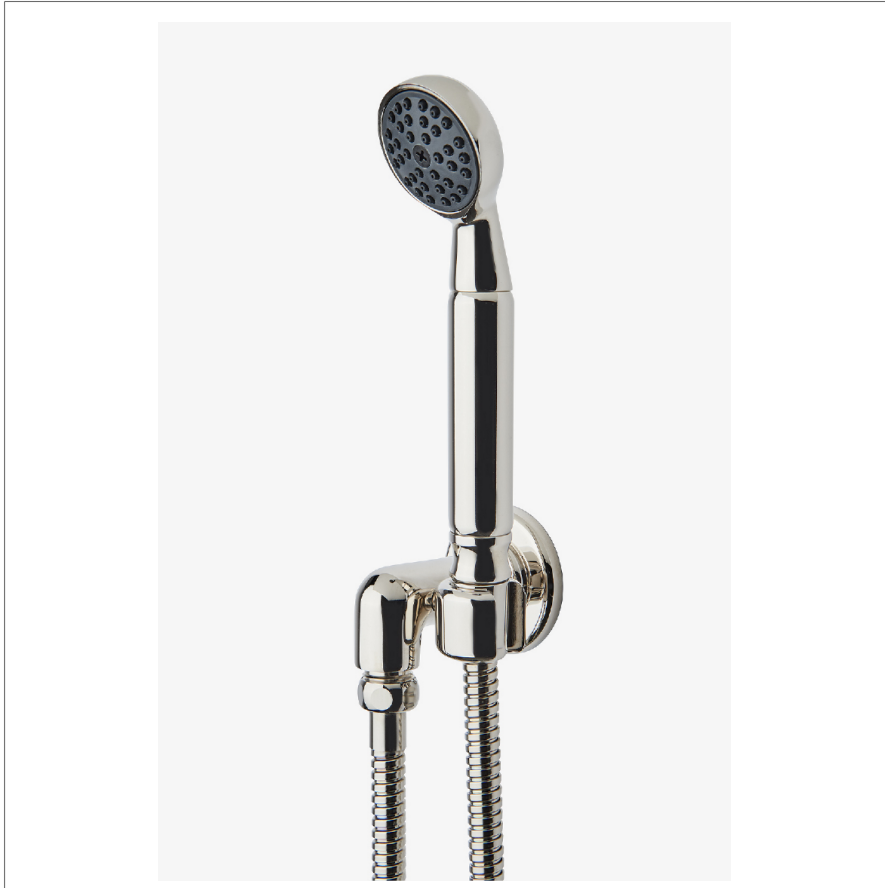

SHOWN IN LUDLOW VOLTA HANDSHOWER ON HOOK | LDHS25

TECHNICAL DETAILS

ADA Compliance: When installed per ADA guidelines
Adjustable Versus Fixed Spray: Fixed Spray
Fittings Hole Diameter: 1 3/8"
Handshower Spray Hose Length: 60"
Inlet Connection Size: 1/2"
Inlet Connection Type: Female NPT
Integrated Diverter: N
Pivot: N
Primary Material: Brass
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 20.0 psi
Water Pressure Recommended: 45.0 psi

INSPIRATION

Our fresh take on American industrial design comes in two styles, both of them clean-lined and distinct to Waterworks.

CODES & STANDARDS

LDHS25X, ASME A112.18.1/CSA B125.1, WaterSense(1.5gpm and 1.75gpm Only), Waterworks Handshowers use check valves compliant to ASME A112.18.3 for backflow protection. CEC, State of MA

PRODUCT FEATURES

Handshower design features metal handle with round spray pattern, a 2" Head, Rubber Nozzles for easy clean & drip reduction system
BSPP Threaded Adapter included for International Plumbing Installations.

Stocked in a Chrome, Nickel and Brass

Available in 1.75gpm (6.6L/min) flow rate

CERTIFICATIONS



PRODUCT (NOTES)

LUDLOW

Ludlow Volta Handshower on Hook

LDHS25

