

ViaWorks 3/4" Thermostatic Valve with 7" Tile Guard



SHOWN IN VIAWORKS 3/4" THERMOSTATIC VALVE WITH 7" TILE GUARD | GU78TH

TECHNICAL DETAILS

Depth/Width: 89 mm
Fittings Hole Diameter: 178 mm
Height: 133 mm
Inlet Connection Size: 3/4"
Inlet Connection Type: Female G/BSPP
Length: 165 mm
Outlet Connection Size: 3/4"
Outlet Connection Type: Female G/BSPP
Primary Material: Brass
Suggested Application: Bath
Valve Material: Bi-metal strip
Water Pressure Maximum: 6.0 bar
Water Pressure Minimum: 1.5 bar
Water Pressure Recommended: 3.0 bar

INSPIRATION

The ViaWorks collection encompasses all Waterworks valves, which are just as impeccably engineered as our legendary fittings and the finest the industry has to offer in terms of performance, features and functionality. ViaWorks valves are engineered with more than three generations of bath and kitchen expertise, each with installers and lifelong service in mind.

CODES & STANDARDS

Code # GUSV78: ASME A112.18.1 / CSA B125.1, State of Ma

PRODUCT FEATURES

Integrated anti-scald protection.

3/4" inlet and outlet connections. Integrated check valves guarantee there is no crossover of hot or cold water.

16 gpm (gallons per minute) unrestricted maximum flow at 60 psi


Flows water to up to six shower components simultaneously. Unique flush plate to clear construction debris before thermostatic cartridge is installed.

Designed exclusively for the .25 Thermostatic Control Valve Trim

CERTIFICATIONS


PRODUCT (NOTES)

ViaWorks 3/4" Thermostatic Valve with 7" Tile Guard

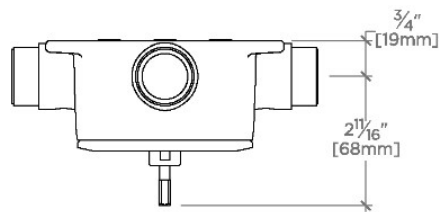


TOP VIEW

SCALE: 3"=1'-0"

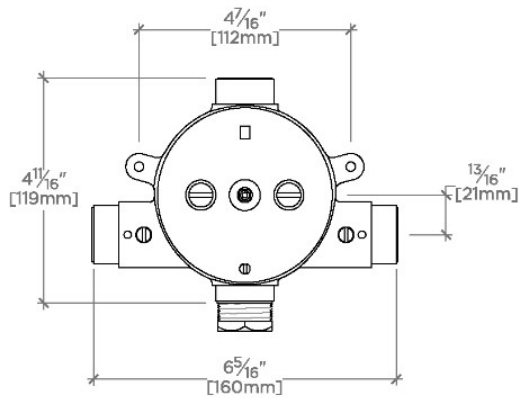

FRONT VIEW

SCALE: 3"=1'-0"



SIDE VIEW

SCALE: 3"=1'-0"