

Flyte

FLS200

Flyte 10" Rain Showerhead with 6" Ceiling Mounted Shower Arm



SHOWN IN FLYTE 10" RAIN SHOWERHEAD WITH 6" CEILING MOUNTED SHOWER ARM | FLS200

TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed
 Fittings Hole Diameter: 32 mm
 Flow Restriction Options: 1.5, 1.75, 2.0
 Inlet Connection Size: 1/2"
 Inlet Connection Type: Male NPT
 Pivot: Y
 Primary Material: Brass
 Restricted Maximum Flow Rate: 6.6 liters/min
 Water Pressure Maximum: 6.0 bar
 Water Pressure Minimum: 1.5 bar
 Water Pressure Recommended: 3.0 bar

INSPIRATION

Pure Modernism. Like minimalist works of art, the elegant proportions of these light, fluid elements bring sculptural reference to a room.

CODES & STANDARDS

FLS200X, ASME A112.18.1/CSA B125.1, CEC(1.5GPM & 1.75GPM Only), WaterSense(1.5GPM, 1.75GPM & 2.0GPM Only), DOE, State of MA

PRODUCT FEATURES

- Made of Brass
- Features a swivel 10" rain showerhead with easy clean rubber nozzles
- Includes a 6" ceiling mounted shower arm
- Stocked in Brass, Chrome, Nickel and Matte Nickel
- Rain showerhead available in 1.75gpm (6.6L/min) flow rate

CERTIFICATIONS




PRODUCT (NOTES)

Flyte

FLS200


Flyte 10" Rain Showerhead with 6" Ceiling Mounted Shower Arm

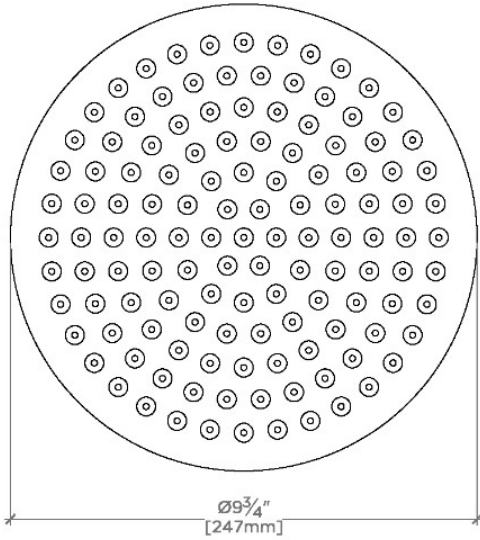

CEILING VIEW


SCALE: 3"=1'-0"

STYLE NO.	DIM "A"	DIM "B"
FLS200	10 ⁵ / ₁₆ " [261mm]	6 ⁹ / ₁₆ " [167mm]
ISS200		
FLS201	16 ⁵ / ₁₆ " [414mm]	12 ⁹ / ₁₆ " [319mm]
ISS201		
FLS202	22 ⁵ / ₁₆ " [566mm]	18 ⁹ / ₁₆ " [472mm]
ISS202		

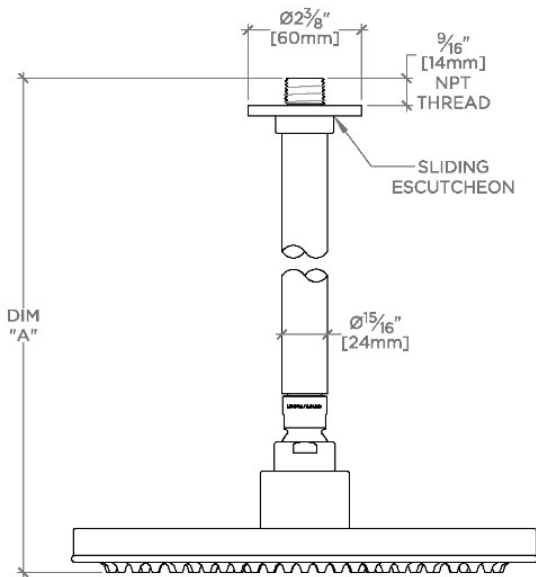

FRONT VIEW

SCALE: 3"=1'-0"

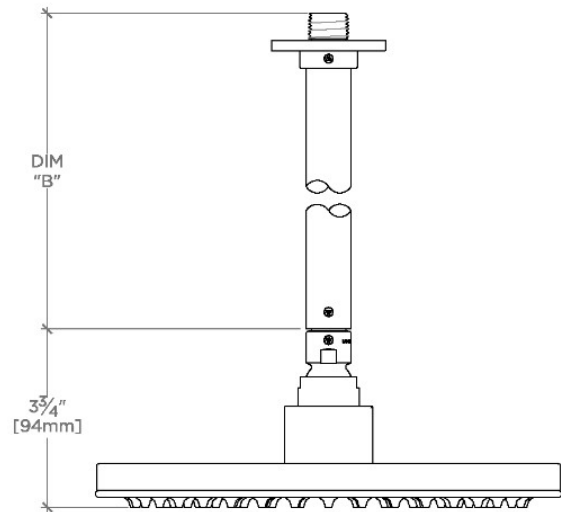

SIDE VIEW

SCALE: 3"=1'-0"