EASTON

ELS2R3

Easton Gooseneck Lavatory Faucet with Royal Delft Polychrome Floral Handles



SHOWN IN EASTON GOOSENECK LAVATORY FAUCET WITH ROYAL DELFT POLYCHROME FLORAL HANDLES | ELS2R3

TECHNICAL DETAILS

Deck Thickness Maximum: 49 mm
Deck Thickness Minimum: 10 mm
Drain Depth Maximum: 57 mm
Drain Depth Minimum: 38 mm
Drain Hole Diameter: 38 mm
Drain Style: Pop-Up
Fittings Hole Diameter: 35 mm
Handle Spread Maximum: 305 mm
Handle Spread Minimum: 203 mm
Handle Turn Angle: Quarter Turn
Inlet Connection Size: 1/2"
Inlet Connection Type: MALE WITH SUPPLY NUT
Restricted Maximum Flow Rate: 4.5 liters/min
Valve Material: Ceramic
Water Pressure Maximum: 6.0 bar
Water Pressure Minimum: 1.5 bar
Water Pressure Recommended: 3.0 bar

INSPIRATION

Rooted in classical Edwardian design, Easton is our most expansive collection—offering a comprehensive family of pieces that bring polished detail and timeless tradition to any setting. Revered for its exquisite proportions and impeccable scale, Easton is a trusted choice among designers.

CODES & STANDARDS

ELS2R3-F.RX, NSF/ANSI/CAN 61:Q < 1, NSF/ANSI/CAN 372, ASME A112.18.1/CSA B125.1, WaterSense(1.0GPM and 1.2GPM Only), CEC, DOE

PRODUCT FEATURES

Royal Delft Handpainted Earthenware Lever Handles

Includes Universal Lift and Turn Drain (UNLD23) which fits 1-1/2" through 1-3/4" drain hole openings

Available in 1.2gpm (4.5L/min) flow rate.

Includes interchangeable indices, with the Waterworks logo installed as standard and a complementary set of "H" & "C" indices presented in a velvet pouch, allowing you to tailor the look to your space.
Stocked in Nickel and Brass


CERTIFICATIONS

PRODUCT (NOTES)


EASTON

ELS2R3


Easton Gooseneck Lavatory Faucet with Royal Delft Polychrome Floral Handles

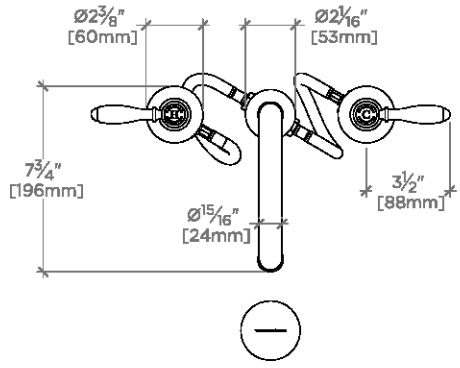

TOP VIEW SCALE: 1½"=1'-0"

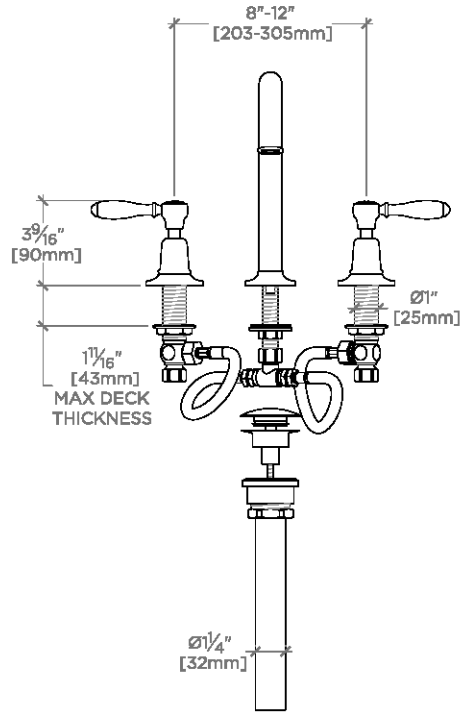

FRONT VIEW SCALE: 1½"=1'-0"

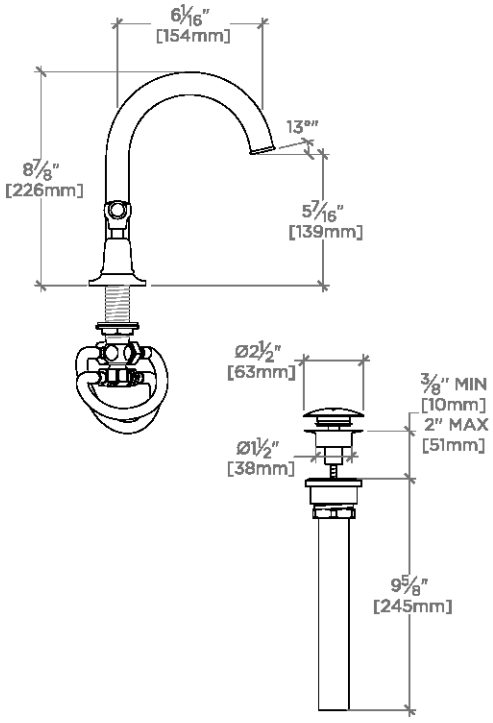

SIDE VIEW SCALE: 1½"=1'-0"