

## VIAWORKS

GUTH48

ViaWorks 3/4" Thermostatic Valve with Integrated Volume Control with 5 3/4" Spread



SHOWN IN VIAWORKS 3/4" THERMOSTATIC VALVE WITH INTEGRATED VOLUME CONTROL WITH 5 3/4" SPREAD | GUTH48

### TECHNICAL DETAILS

Inlet Connection Size: 3/4"  
Inlet Connection Type: Female NPT  
Outlet Connection Size: 3/4"  
Outlet Connection Type: Female NPT  
Primary Material: Brass  
Suggested Application: Bath  
Valve Material: Bi-metal Strip/Ceramic  
Water Pressure Maximum: 85.0 psi  
Water Pressure Minimum: 20.0 psi  
Water Pressure Recommended: 45.0 psi

### INSPIRATION

The ViaWorks collection encompasses all Waterworks valves, which are just as impeccably engineered as our legendary fittings and the finest the industry has to offer in terms of performance, features and functionality. ViaWorks valves are engineered with more than three generations of bath and kitchen expertise, each with installers and lifelong service in mind.

### CODES & STANDARDS

### PRODUCT FEATURES

Integrated anti-scald protection.

3/4" inlet and outlet connections.

16 gpm (gallons per minute) unrestricted maximum flow at 60 psi

Unique flush plate to clear construction debris before thermostatic cartridge is installed

Made in Europe of Brass Construction


### CERTIFICATIONS

### PRODUCT (NOTES)

## VIAWORKS


GUTH48

ViaWorks 3/4" Thermostatic Valve with Integrated Volume Control with 5 3/4" Spread

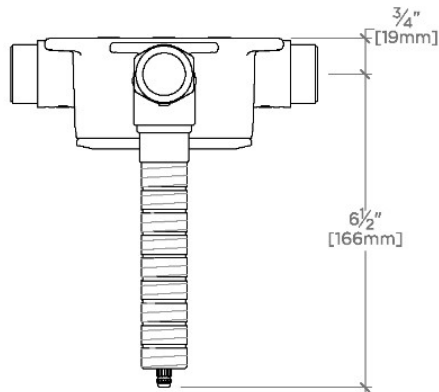


TOP VIEW

SCALE: 3"=1'-0"

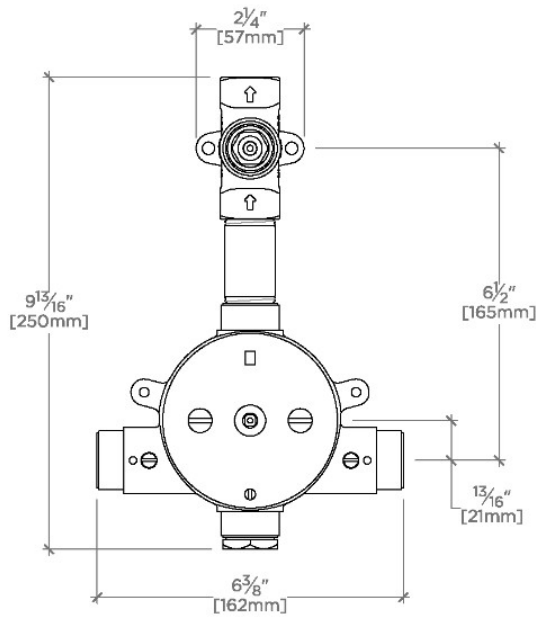

FRONT VIEW

SCALE: 3"=1'-0"

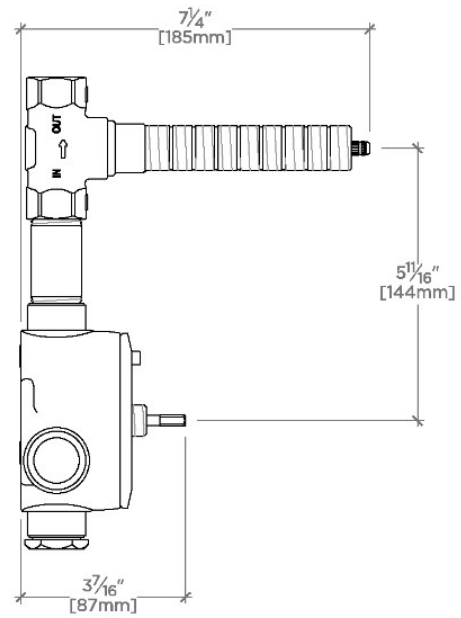

SIDE VIEW

SCALE: 3"=1'-0"