
Foro FRS161

Foro 6" Showerhead with 12" Ceiling Mounted Shower Arm

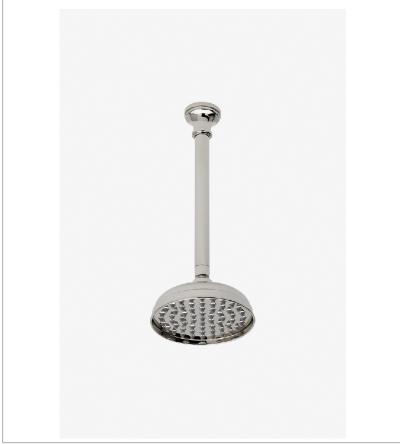

TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed Fittings Hole Diameter: 32 mm Flow Restriction Options: 1.5, 1.75, 2.0 Inlet Connection Size: 1/2" Inlet Connection Type: Male NPT Pivot: Y Primary Material: Brass

Restricted Maximum Flow Rate: 6.6 liters/min Water Pressure Maximum: 6.0 bar

Water Pressure Minimum: 1.5 bar Water Pressure Recommended: 3.0 bar

SHOWN IN FORO 6" SHOWERHEAD WITH 12" CEILING MOUNTED SHOWER ARM | FRS161

INSPIRATION

A mix of historical references, including finely etched vintage silver, come together in this twist on classical design - a wonderfully elegant formal statement.

CODES & STANDARDS

FRS161X, ASME A112.18.1/CSA B125.1, CEC(1.5GPM & 1.75GPM Only), WaterSense(1.5GPM, 1.75GPM & 2.0GPM Only), DOE, State of MA

PRODUCT FEATURES

Made of Brass

Features a swivel 6" showerhead with easy clean rubber nozzles

Includes a 12" ceiling mounted shower arm

Stocked in Brass, Chrome, Nickel and Matte Nickel

Showerhead available in 1.75gpm (6.6L/min) flow rate

CERTIFICATIONS





PRODUCT (NOTES)

Foro FRS161

Foro 6" Showerhead with 12" Ceiling Mounted Shower Arm

