




ESTB. 1978

WATERWORKS

Bradbury

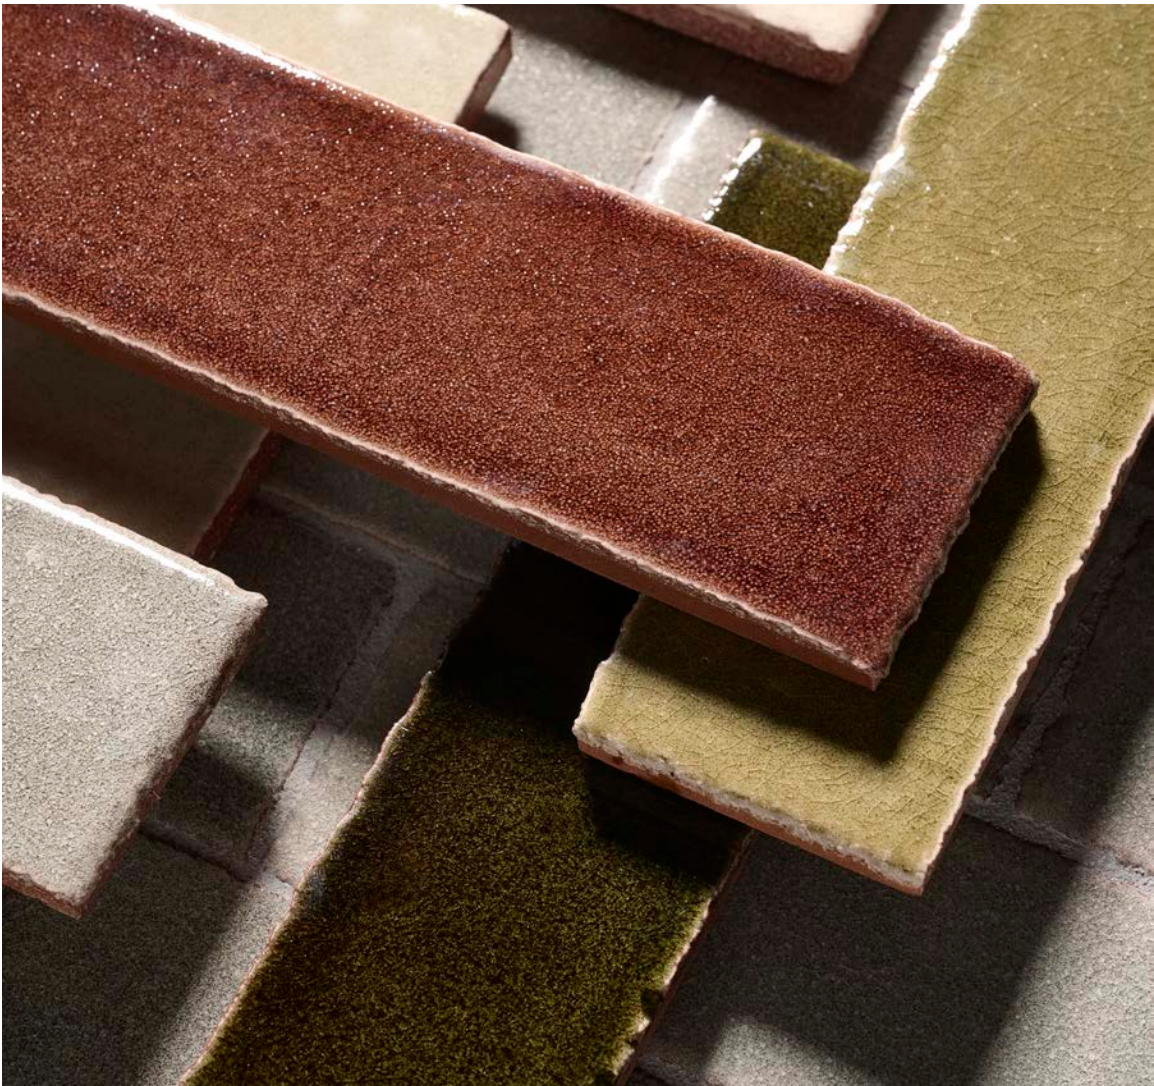

Inspired by the iconic Bradbury Building, a historic L.A. landmark built in 1892, this ceramic tile collection reimagines the rugged beauty of traditional glazed brick with a more refined, architectural sensibility. Crafted from fine red-body clay, each tile has a subtly irregular surface that enhances the depth and variation of the glaze. A curated palette of distinctive hues and dramatic large-scale trims brings texture, dimension, and timeless character to any interior.



ESTB. 1978

WATERWORKS

Bradbury

FIELD TILE



2 $\frac{3}{8}$ " X 8 $\frac{1}{4}$ " *
BRF028



3 $\frac{1}{8}$ " X 6 $\frac{1}{4}$ " *
BRF036



4 $\frac{1}{8}$ " X 8 $\frac{1}{4}$ " *
BRF048

ARCHITECTURAL ELEMENTS



BAR LINER
1" X 8 $\frac{1}{4}$ "
BRLN01



CHAIR RAIL
2 $\frac{3}{8}$ " X 8 $\frac{1}{4}$ "
BRRL01



CHISELED BASE
6 $\frac{1}{8}$ " X 8 $\frac{1}{4}$ "
BRBS01

* Coordinating single and corner glazed edges available



ESTB. 1978

WATERWORKS

Bradbury

PALETTE



Oatmeal

V5



Merino

V5



Capri

V5



Drizzle

V5



Brunette

V5



Moss

V5



Mocha

V5



Celadon

V5



Tawny

V5



Gravel

V5

* See variation chart on page 4



** Surface texture is inherent in the material; glazes may crackle



ESTB. 1978

WATERWORKS

Bradbury

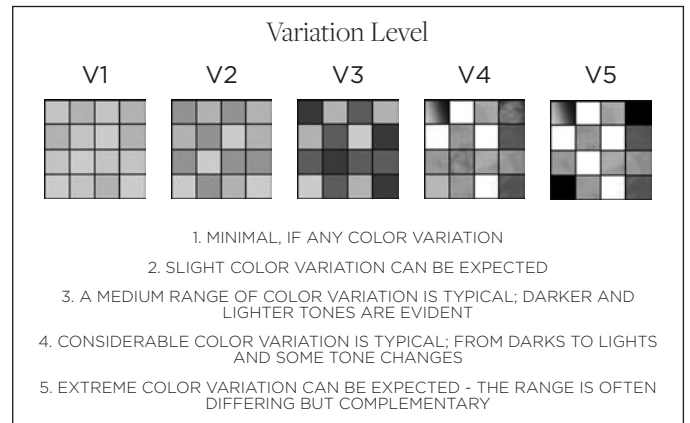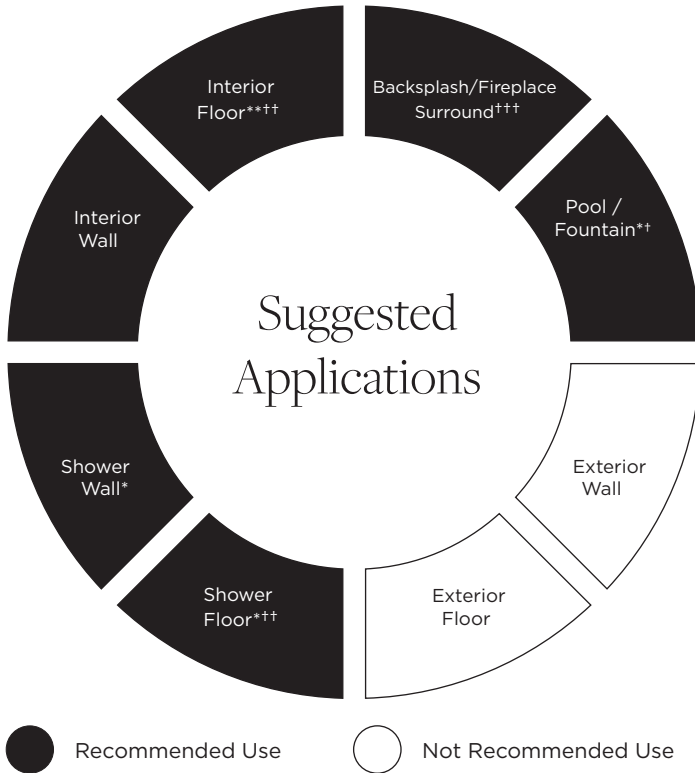

**PLEASE REFER TO COLLECTION TEARSHEET
FOR VARIATION LEVEL BY COLOR.**

**SAMPLING IS RECOMMENDED TO UNDERSTAND
VARIATION OF MATERIAL**

Product Variation

Color, size and surface variation is an inherent characteristic of our handmade tile and should be expected. Refer to our color variation ranking for further details. Please inquire for additional information.

Application Notes

* Suitable for use in wet environments, including steam showers, if properly installed, sealed, and maintained

** Suitable for light traffic floor ONLY

† Suitable above waterline in tropical/subtropical climates only

† † Small format ONLY (2x4 ONLY)

Installation / Maintenance

- WATERWORKS ASSUMES NO RESPONSIBILITY FOR INSTALLATION
- Installation constitutes acceptance.
- Tile should be installed by a licensed and experienced tile setter.
- Refer to TCNA (Tile Council of North America) or ANSI standards for installation guidelines.
- All tile must be inspected PRIOR to installation.
- Dry lay tile prior to installation to allow for blending of color variation.
- Tile should be sealed PRIOR to grouting. Dark grout can stain crackle tile.
- Waterworks recommends a grouted test panel prior to installation to understand final appearance of grouted materials
- Re-seal tile and grout after installation and maintain regularly.

