


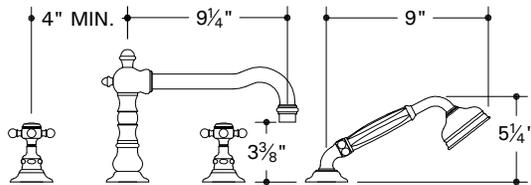


- JUTU19** (cross handles and metal handshower)
- JUTU20** (metal lever handles and handshower)
- JUTU21** (white porcelain lever handles and handshower)
- JUTU23** (black porcelain lever handles and handshower-MTO)

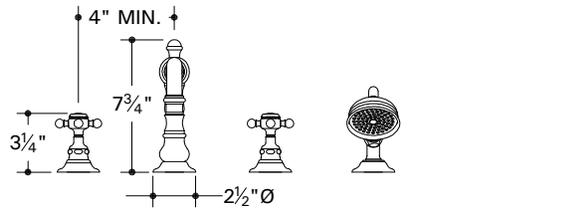

- When you screw the escutcheon onto the deck valve body, expose several threads above it. Next, screw valve cover down until it seats. Then move the escutcheon up until it loosely meets the bottom of the cover. Finally, tighten bottom lock nut to secure valve to deck.
- Once the spout is securely mounted, install the flexible hoses between the spout and valve bodies using the gaskets provided.
- Connect the handshower hose to the anti-scald protection device located at the base of the spout's tee.
- **NOTE:** The anti-scald protection device will stop the flow of water exceeding a temperature of 115 degrees Fahrenheit.
- After installation, unscrew and remove the aerator assembly. Carefully open the hot and cold valves fully to flush out any debris in the supply lines. Once the lines have been flushed, close the valves and reinstall the aerator assembly.
- **IMPORTANT:** It is necessary to check for leaks and proper function of mixer prior to being enclosed.

If further assistance is required, please contact Product Support at 1-800-927-2120 (8am - 7pm EST).

- Use only a protected, smooth-jawed, or strap wrench on any finished surface.
- For proper installation, the deck surface should be installed prior to mounting the mixer.
- It is recommended that an access panel be provided for future service.
- Check the specification (left) for drilling holes sizes and suggested centers.
- Run 3/4" supply lines for maximum water flow.
- Accessible shut-off valves, which will facilitate servicing, are recommended for the hot and cold feed lines.
- To remove trim from the valve body, pull out index assembly (held in place by friction o-ring), exposing the screw for the handle. The cover and escutcheon should be hand tight.
- **DO NOT** use putty on deck fittings. Upper and lower washers are provided.

These guidelines have been prepared for the professional contractor to aid in the installation of: **JULIA CONCEALED DECK MOUNTED TUB FILLER WITH HANDSHOWER, CROSS HANDLES (JUTU19) & LEVER HANDLES (JUTU20, JUTU21, JUTU23)** All dimensions are based on original specification and are subject to change and variation. Please consult your Design Associate for current specifications.

W A T E R W O R K S