

R.W. ATLAS

RWKM50

R.W. Atlas Three Hole High Profile Kitchen Faucet with Metal Side Mount Lever Handles and Spray



SHOWN IN R.W. ATLAS THREE HOLE HIGH PROFILE KITCHEN FAUCET WITH METAL SIDE MOUNT LEVER HANDLES AND

TECHNICAL DETAILS

Adjustable versus Fixed Spray: Fixed Spray
Deck Thickness Maximum: 1 5/8"
Deck Thickness Minimum: 1/4"
Escutcheon Primary Material: Brass
Fittings Hole Diameter: 1 3/8"
Flow Restriction Options: 2.0, 1.75, 1.5
Handle Spread Maximum: 12"
Handle Spread Minimum: 8"
Handle Turn Angle: Quarter Turn
Handshower / Spray Hose Length: 49"
Depth / Width: 11 13/16"
Height: 10 3/16"
Inlet Connection Size: 1/2"
Inlet Connection Type: Male with Supply Nut
Length: 21 1/8"
Number of Handles: Two
Primary Material: Brass
Restricted Maximum Flow Rate: 2.2 gpm
Spout Swivel: Y
Spray Included in Unit: Y
Suggested Application: Bar, Kitchen, Laundry
Valve Material: Ceramic
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 20.0 psi
Water Pressure Recommended: 45.0 psi

INSPIRATION

Powerful shapes, genuine materials and unique aesthetic details. The original, impeccable vision of R.W. Atlas pairs American ingenuity with European craftsmanship.

PRODUCT FEATURES

Features side mount lever handles with tumbled barrels marked with an engraved H and C.
Integrated side spray allows for mixed water and features knurled detail on handle.
Meets or exceeds the Weighted Average Lead Requirements of 0.25%.
Standard flow rate is 2.2gpm (8.3 L/min) and State of California requires a maximum of 1.8gpm(6.8 L/min). Also available in high efficiency flow options. Contact a sales associate for details.

CERTIFICATIONS




WATERWORKS

R.W. ATLAS


RWKM50

R.W. Atlas Three Hole High Profile Kitchen Faucet with Metal Side Mount Lever Handles and Spray

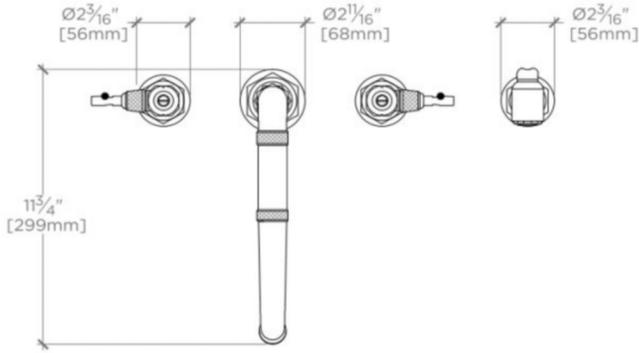


TOP VIEW

SCALE: $1\frac{1}{2}"=1'-0"$

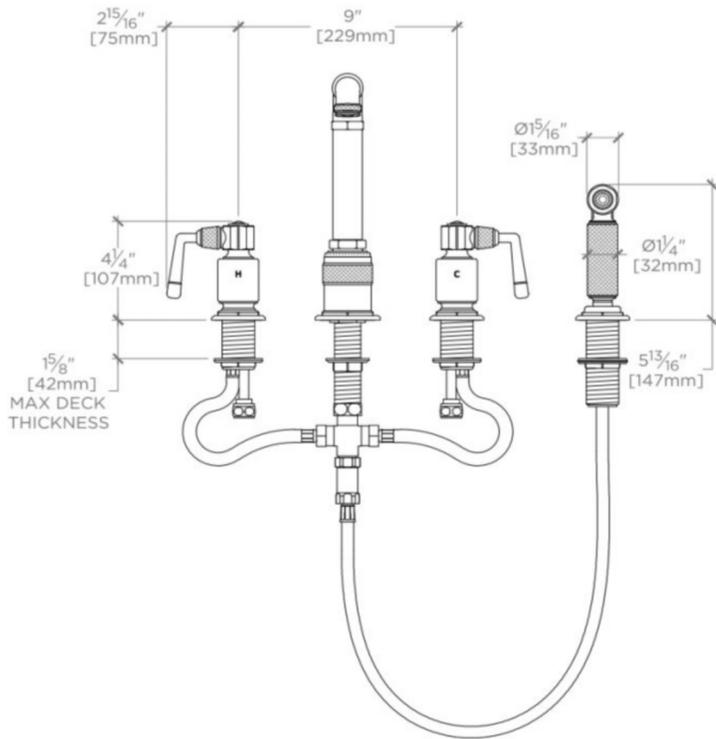

FRONT VIEW

SCALE: $1\frac{1}{2}"=1'-0"$

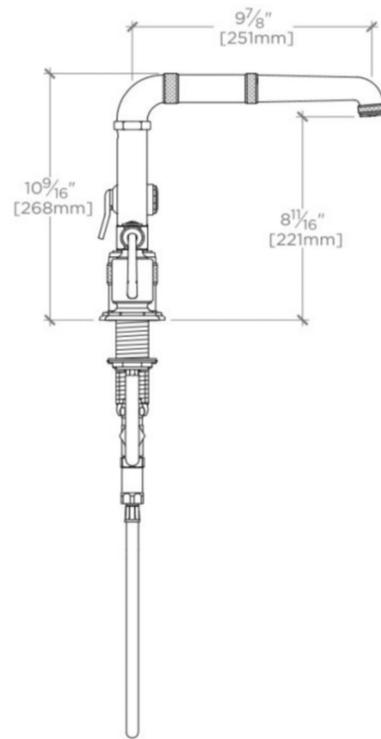

SIDE VIEW

SCALE: $1\frac{1}{2}"=1'-0"$