

## Bond

BKM120

Bond Solo Series One Hole Gooseneck Integrated Pull Spray Kitchen Faucet with Straight Lever Handle



SHOWN IN BOND SOLO SERIES ONE HOLE GOOSENECK INTEGRATED PULL SPRAY KITCHEN FAUCET WITH STRAIGHT LEVER HANDLE | BKM120

### TECHNICAL DETAILS

ADA Compliance: Yes  
 Adjustable Versus Fixed Spray: Adjustable  
 Deck Thickness Maximum: 57 mm  
 Deck Thickness Minimum: 6 mm  
 Fittings Hole Diameter: 38 mm  
 Handle Turn Angle: Tilt and Turn  
 Handshower Spray Hose Length: 1.5 m  
 Inlet Connection Size: 3/8"  
 Inlet Connection Type: Compression Connection  
 Hoses  
 Integrated Diverter: Y  
 Restricted Maximum Flow Rate: 6.6 liters/min  
 Spout Swivel: Y  
 Spray Included In Unit: Y  
 Valve Material: Ceramic  
 Water Pressure Maximum: 6.0 bar  
 Water Pressure Minimum: 1.5 bar  
 Water Pressure Recommended: 3.0 bar

### INSPIRATION

Modern designs infused with rare soul and artistry. Explore our wide range of Bond bath and kitchen elements, from fittings to fixtures to hardware.

### CODES & STANDARDS

BKM120X, NSF/ANSI/CAN 61:Q < 1, NSF/ANSI/CAN 372, ASME A112.18.1/CSA B125.1, State of MA

### PRODUCT FEATURES

Lever Handle

Two Function Integrated Pull Spray operated by a sliding button, switches from aerated stream to jet spray. The button returns to aerated stream when disengaged and remains in spray mode without holding down

Stocked in Chrome, Nickel, Brass and Dark Nickel

### CERTIFICATIONS




### PRODUCT (NOTES)

# WATERWORKS


## Bond

BKM120


Bond Solo Series One Hole Gooseneck Integrated Pull Spray  
Kitchen Faucet with Straight Lever Handle

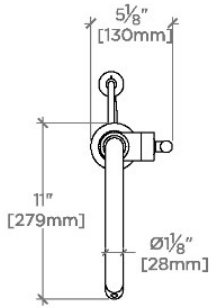


TOP VIEW SCALE: 1"=1'-0"

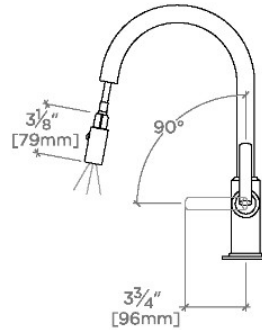


SPRAY AND HANDLE OPERATION SCALE: 1"=1'-0"

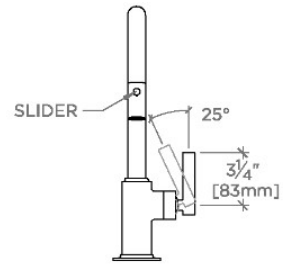

SCALE: 1"=1'-0"

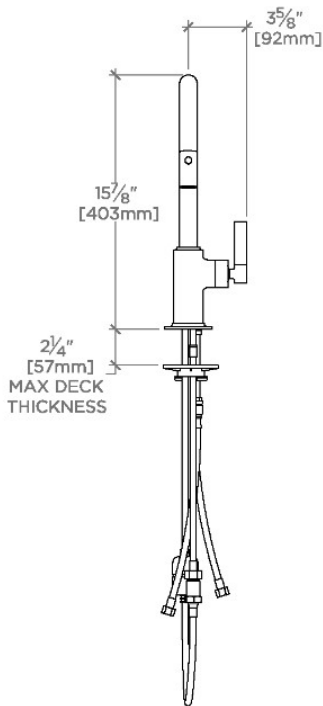


FRONT VIEW SCALE: 1"=1'-0"

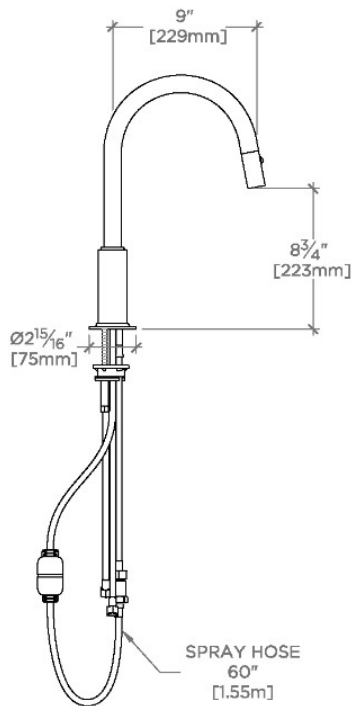

SIDE VIEW SCALE: 1"=1'-0"

NOTE:  
ADAPTER AND GASKET (x2) INCLUDED -  
INTERNATIONAL USE ONLY

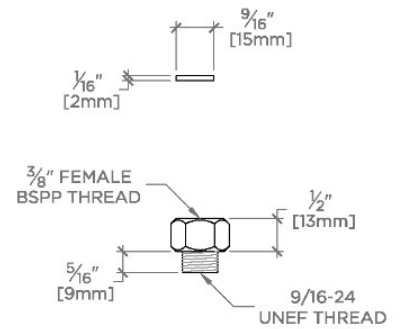

ADAPTER NOT TO SCALE