
Bond

BLS34B

Bond Tandem Series Wall Mounted Lavatory Faucet with Two-Tone Guilloche Lines Single Knob Handle

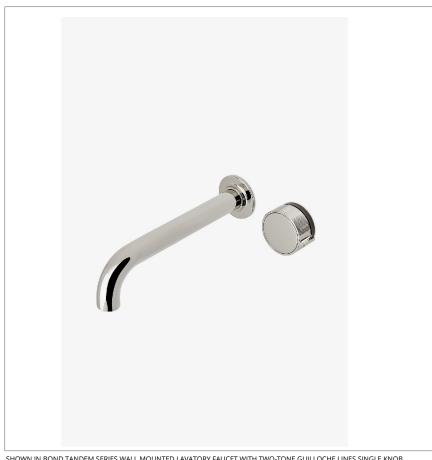

SHOWN IN BOND TANDEM SERIES WALL MOUNTED LAVATORY FAUCET WITH TWO-TONE GUILLOCHE LINES SINGLE KNOB HANDLE | BLS34B

INSPIRATION

Modern designs infused with rare soul and artistry. Explore our wide range of Bond bath and kitchen elements, from fittings to fixtures to hardware.

TECHNICAL DETAILS

ADA Compliance: Yes Drain Depth Maximum: 67 mm Drain Depth Minimum: 10 mm Drain Hole Diameter: 44 mm Drain Style: Push Touch Fittings Hole Diameter: 35 mm Flow Restriction Options: 1.2 Handle Turn Angle: Quarter Turn Inlet Connection Size: 1/2" Inlet Connection Type: Female NPT Number Of Holes: Two Hole Primary Material: Brass Restricted Maximum Flow Rate: 4.5 liters/min Spout Swivel: N Valve Material: Ceramic Water Pressure Maximum: 6.0 bar Water Pressure Minimum: 1.5 bar Water Pressure Recommended: 3.0 bar

CODES & STANDARDS

BLS34BX, NSF/ANSI/CAN 61:Q < 1, NSF/ANSI/CAN 372, ASME A112.18.1/CSA B125.1, CEC, State of MA

PRODUCT FEATURES

Knob Handle

Includes European size push touch drain

Features Two-Tone Knob Handle

Stocked in Nickel and Brass

Available in 1.2gpm (4.5L/min) flow rate; Requires rough valve, sold separately: GULV29

CERTIFICATIONS



PRODUCT (NOTES)

Bond

Bond Tandem Series Wall Mounted Lavatory Faucet with Two-Tone Guilloche Lines Single Knob Handle

