



PORTLANDIA features a harmonious blend of terrazzo and solid cement tiles. Handcrafted by Italian artisans in a range of sizes and finishes, they give walls and floors a cool, urbane look.



SOLID FIELD TILE



4" X 4" \* POFO44



8" X 8" \* POFO88





### WATERWORKS

## Portlandia

### SOLID PALETTE



















<sup>\*\*</sup> Available in Honed Finish Only



### TERRAZZO PICCOLO FIELD TILE



8" X 8" \* POF88P






16" X 16" \*\* POF16P



#### TERRAZZO PICCOLO FIELD TILE

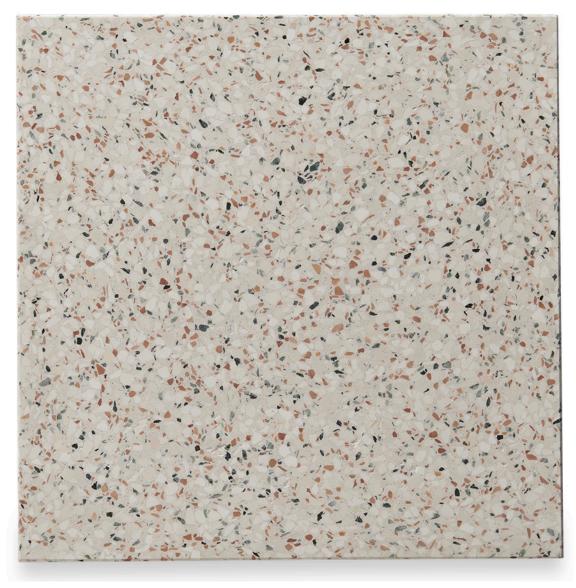

24" X 24" \*\* POF24P

\*\*3/4" thick



### WATERWORKS

# Portlandia

### TERRAZZO PICCOLO PALETTE





### TERRAZZO MEZZO FIELD TILE



16" X 16" \*\* POF16M



TERRAZZO MEZZO FIELD TILE



24" X 24" \*\* POF24M

\*\* 3/4" thick



#### TERRAZZO MEZZO PALETTE


















### TERRAZZO ARMONIA FIELD TILE



16" X 16" \*\* POF16A



#### TERRAZZO ARMONIA FIELD TILE




24" X 24" \*\* POF24A

\*\*3/4" thick




#### TERRAZZO ARMONIA PALETTE











Ellsworth\*\*


Flint\*\*

Suffield\*\*



### WATERWORKS

### Portlandia

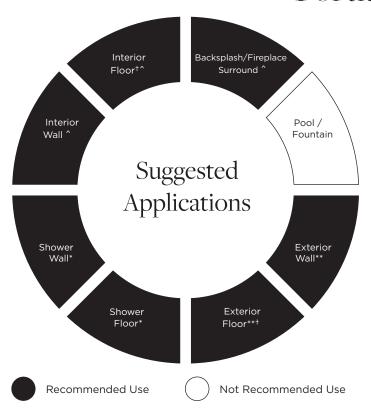


### **Application Notes**

- \* Suitable for use in wet environments, including steam showers, if properly installed, sealed, and maintained
- \*\* All styles suitable for exterior use in tropical/subtropical climate. Piccolo, Armonia, Liscia and Mezzo are suitable for use in feeze/thaw climates.
- <sup>†</sup> For commercial applications, please inquire
- ^ Suitable applications for Portlandia Instock

### Installation / Maintenance

- $\bullet$  WATERWORKS ASSUMES NO RESPONSIBILITY FOR INSTALLATION
- Installation constitutes acceptance.
- Tile should be installed by a licensed and experienced tile setter.
- Refer to TCNA (Tile Council of North America) or ANSI standards for installation guidelines.
- All tile must be inspected PRIOR to installation.
- Dry lay tile prior to installation to allow for blending of color variation.
- Tile should be sealed PRIOR to grouting. Dark grout can stain crackle tile.
- Waterworks recommends a grouted test panel prior to installation to understand final appearance of grouted materials
- Re-seal tile and grout after installation and maintain regularly.

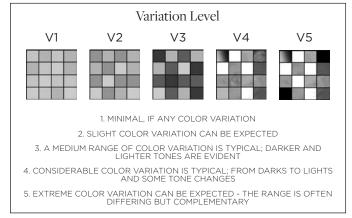

### PLEASE REFER TO COLLECTION TEARSHEET FOR VARIATION LEVEL BY COLOR.

#### SAMPLING IS RECOMMENDED TO UNDERSTAND VARIATION OF MATERIAL


#### **Product Variation**


Color, size and surface variation is an inherent characteristic of our cement tile and should be expected. Refer to our color variation ranking for further details. Please inquire for additional information.

### Custom Opportunities Available

Minimums and extended lead-times may apply.

Please contact your local Waterworks showroom or our direct sales team at 800.899.6757.







#### INSTOCK TERRAZZO PALETTE



16" x 16" \*\*