

UNIVERSAL

UNSH08

Universal Recessed Ceiling Mounted 7 3/4" Shower Rose



SHOWN IN UNIVERSAL RECESSED CEILING MOUNTED 7 3/4" SHOWER ROSE| UNSH08

TECHNICAL DETAILS

Adjustable versus Fixed Spray: Fixed Spray
Diameter of Head: 197 mm
Flow Restriction Options: 2.5, 2.0, 1.75, 1.5
Depth / Width: 152 mm
Height: 114 mm
Inlet Connection Size: 1/2"
Inlet Connection Type: Female Thread
Installation Type: Ceiling Mounted
Integrated Diverter: N
Interior / Exterior Application: Interior Only
Length: 152 mm
Pivot: N
Primary Material: Brass
Suggested Application: Bath
Water Pressure Maximum: 6.0 bar
Water Pressure Minimum: 1.5 bar
Water Pressure Recommended: 3.0 bar

INSPIRATION

Our Universal collection features timeless designs complementing any of our Waterworks. With a wide range of product, from fittings to accessories, Universal adds exquisite proportion and balance to any environment.

CODES & STANDARDS

Code # : ASME A112.18.1 / CSA B125.1, Certified with CEC

PRODUCT FEATURES

Provides an excellent option for low bathroom ceilings by utilizing every inch 6" shower rose delivers a soft, rainfall of water that is soothing and refreshing. Stocked in 2.5gpm (9.5 L/min) and 1.75gpm (6.6 L/min). State of California requires 1.75gpm (6.6 L/min) to comply with their water conservation requirements. Other flow options are available to order, contact your sales associate or call 1 (800) 899-6757 for details.

CERTIFICATIONS




PRODUCT (NOTES)

Showerhead only.


UNIVERSAL

UNSH08


Universal Recessed Ceiling Mounted 7 3/4" Shower Rose

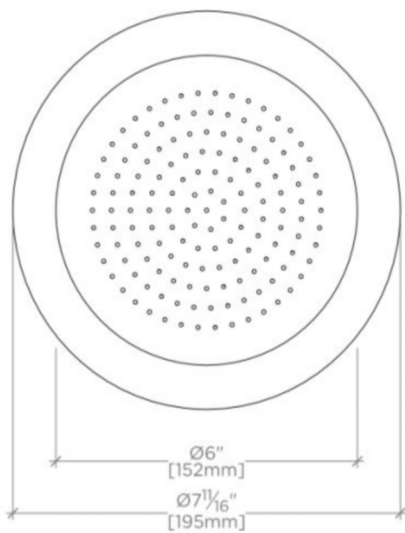

CEILING VIEW SCALE: 3"=1'-0"

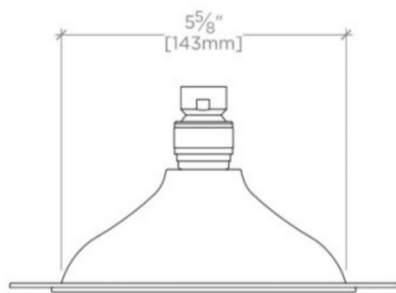

FRONT VIEW SCALE: 3"=1'-0"

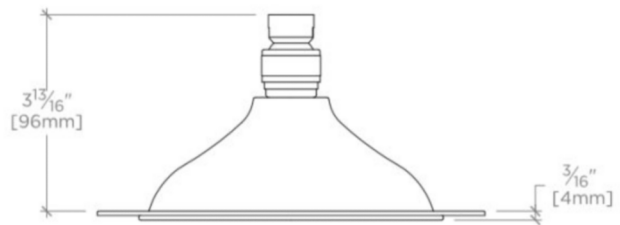

SIDE VIEW SCALE: 3"=1'-0"