


## BOND

## BKM22D

Bond Union Series Gooseneck Kitchen Faucet and Spray with Enamel Guilloche Lines Lever Handles

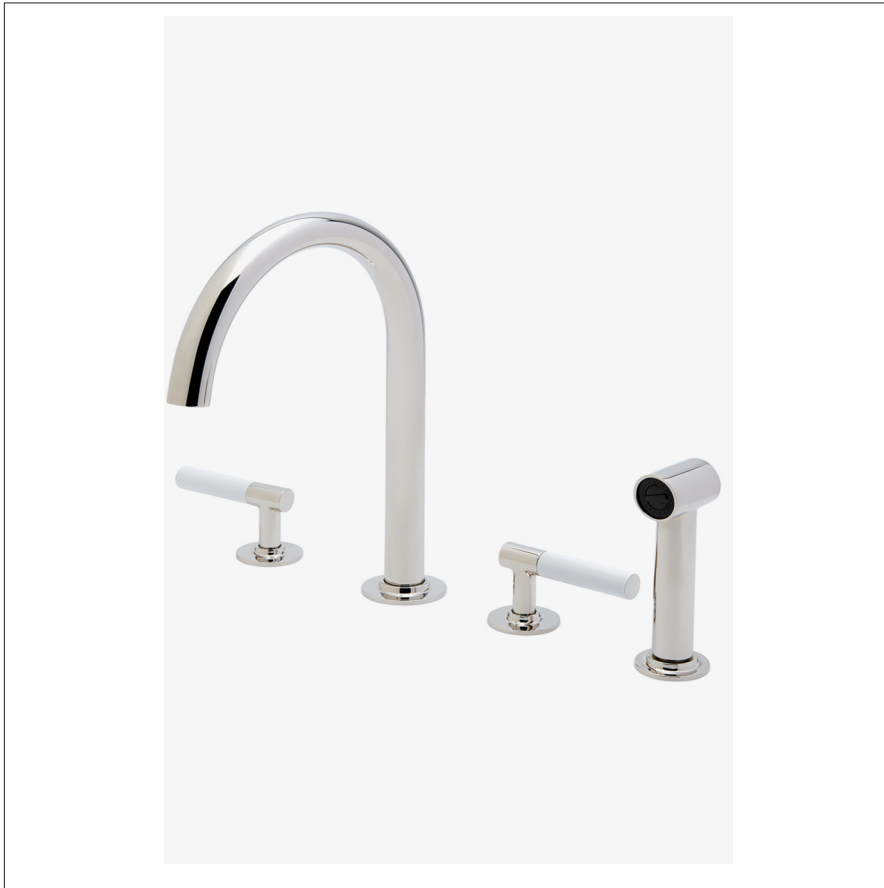

FILEDESCRIPTION

### TECHNICAL DETAILS

Deck Thickness Maximum: 37 mm  
Deck Thickness Minimum: 6 mm  
Fittings Hole Diameter: 35 mm  
Handle Turn Angle: Quarter Turn  
Handshower / Spray Hose Length: 1.5 m  
Inlet Connection Size: 1/2"  
Inlet Connection Type: Male with Supply Nut  
Integrated Diverter: Y  
Restricted Maximum Flow Rate: 6.6 liters/min  
Spout Swivel: Y  
Spray Included in Unit: Y  
Valve Material: Ceramic  
Water Pressure Maximum: 6.0 bar  
Water Pressure Minimum: 1.5 bar  
Water Pressure Recommended: 3.0 bar

### INSPIRATION

Modern designs infused with rare soul and artistry. Explore our wide range of Bond bath and kitchen elements, from fittings to fixtures to hardware.

### PRODUCT FEATURES

Lever Handles

Powerful Side spray with push button activation

Features Guilloche Lines combined with Enamel Handles

Stocked in Nickel and Brass


Available in 1.75gpm (6.6L/min) flow rate

# WATERWORKS

## BOND


## BKM22D

Bond Union Series Gooseneck Kitchen Faucet and Spray with Enamel Guilloche Lines Lever Handles

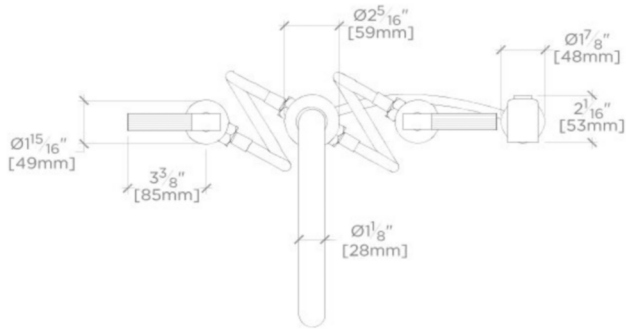


TOP VIEW

SCALE: 1 $\frac{1}{2}"$ =1'-0"

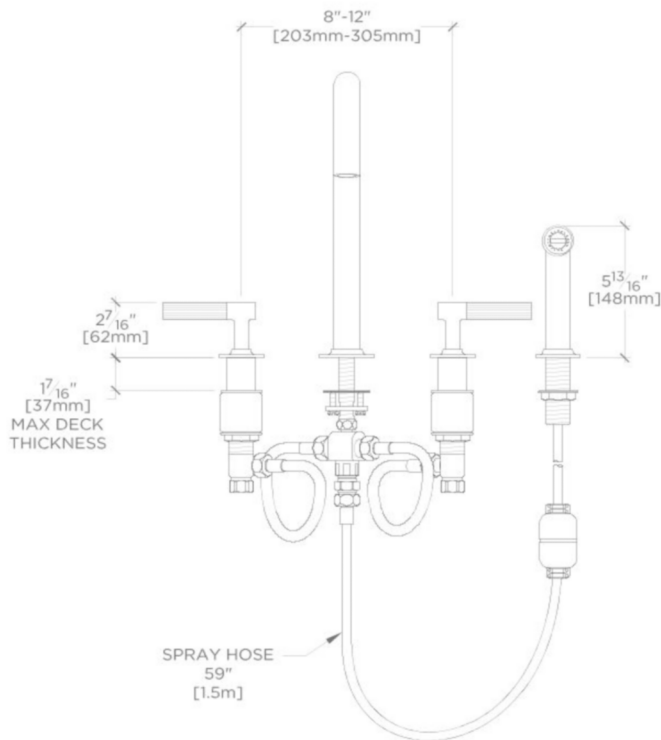

FRONT VIEW

SCALE: 1 $\frac{1}{2}"$ =1'-0"

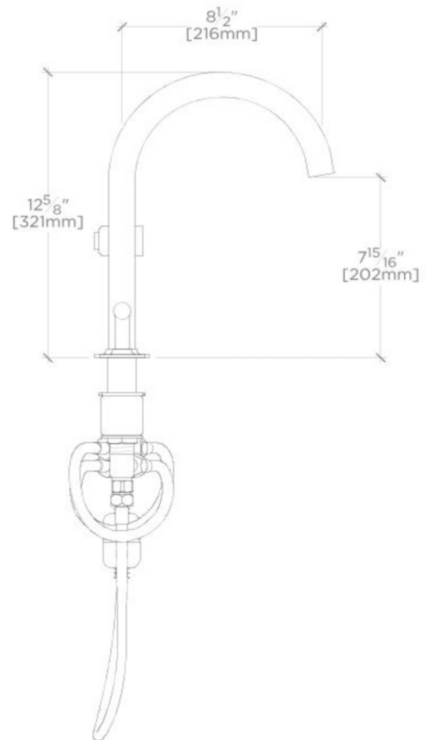

SIDE VIEW

SCALE: 1 $\frac{1}{2}"$ =1'-0"