

Bond

BKM22A

Bond Tandem Gooseneck Kitchen Faucet and Spray with Guilloche Lines Lever Handles



SHOWN IN BOND TANDEM GOOSENECK KITCHEN FAUCET AND SPRAY WITH GUILLOCHE LINES LEVER HANDLES | BKM22A

TECHNICAL DETAILS

ADA Compliance: Yes
 Deck Thickness Maximum: 37 mm
 Deck Thickness Minimum: 6 mm
 Fittings Hole Diameter: 35 mm
 Handle Turn Angle: Quarter Turn
 Handshower Spray Hose Length: 1.5 m
 Inlet Connection Size: 1/2"
 Inlet Connection Type: Male with Supply Nut
 Integrated Diverter: Y
 Restricted Maximum Flow Rate: 6.6 liters/min
 Spout Swivel: Y
 Spray Included In Unit: Y
 Valve Material: Ceramic
 Water Pressure Maximum: 6.0 bar
 Water Pressure Minimum: 1.5 bar
 Water Pressure Recommended: 3.0 bar

INSPIRATION

Bond draws inspiration from the Aesthetic Movement, rare vintage lighters, and modern industrial design. The result is a contemporary collection with a soulful quality that inhabits the full range of modern style, from austere minimalism to warm contemporary.

CODES & STANDARDS

BKM22AX, NSF/ANSI/CAN 61:Q < 1, NSF/ANSI/CAN 372, ASME A112.18.1/CSA B125.1, CEC, State of MA

PRODUCT FEATURES

- Lever Handles
- Powerful Side spray with push button activation
- Features Linear Guilloche Etching Handles
- Stocked in Nickel and Brass
- Available in 1.75gpm (6.6L/min) flow rate

CERTIFICATIONS




PRODUCT (NOTES)

Bond


BKM22A

Bond Tandem Gooseneck Kitchen Faucet and Spray with
Guilloche Lines Lever Handles

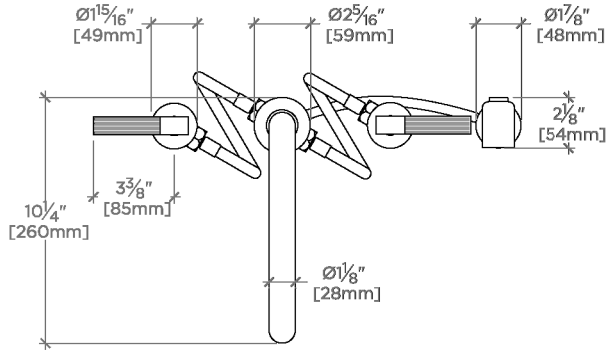


TOP VIEW

SCALE: 1 1/2"=1'-0"

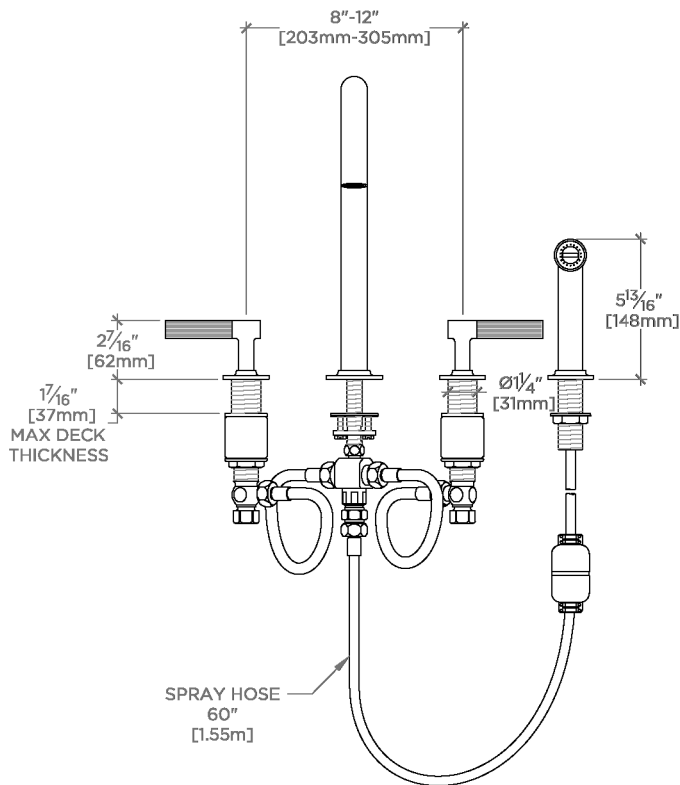

FRONT VIEW

SCALE: 1 1/2"=1'-0"

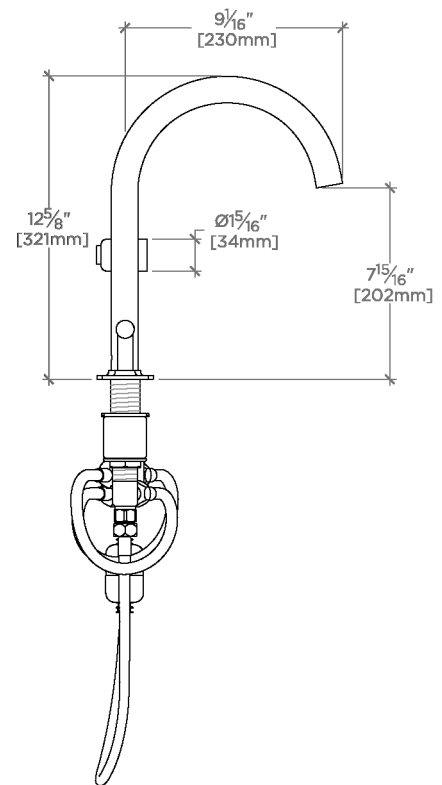

SIDE VIEW

SCALE: 1 1/2"=1'-0"