

.25

PTLS05

.25 Low Profile Three Hole Wall Mounted Lavatory Faucet with Metal Cross Handles



SHOWN IN .25 LOW PROFILE THREE HOLE WALL MOUNTED LAVATORY FAUCET WITH METAL CROSS HANDLES | PTLS05

INSPIRATION

.25 is the ultimate in utilitarian elegance: A simple and understated design that is equally functional and beautiful.

PRODUCT FEATURES

Uses a simple pop-up drain that is closed and opened by pushing down on the stopper. Does not use a lift rod to operate the drain stopper.

The cross handle's anthropomorphic form is not only gentle in its execution, but also welcome to the touch.

Available in 1.2gpm (4.5L/min) flow rate

TECHNICAL DETAILS

ADA Compliance: Yes
Adjustable Versus Fixed Spray: Fixed Spray
Depth/Width: 7 1/2"
Drain Assembly Materials: Brass
Drain Depth Maximum: 1 3/4"
Drain Depth Minimum: 1 1/4"
Drain Hole Diameter: 1 3/4"
Drain Style: Push Touch
Escutcheon Primary Material: Brass
Flow Restriction Options: 1.2
Handle Spread Maximum: 8"
Handle Spread Minimum: 8"
Handle Turn Angle: Quarter Turn
Height: 2 1/2"
Inlet Connection Size: 1/2"
Inlet Connection Type: Copper Sweat
Inlet Supply Spread Maximum: 8"
Inlet Supply Spread Minimum: 8"
Installation Type: Wall Mounted
Length: 10 3/8"
Number Of Handles: Two
Number Of Holes: Three Hole
Primary Material: Brass
Restricted Maximum Flow Rate: 1.2 gpm
Spout Swivel: N
Suggested Application: Bath
Valve Material: Ceramic
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 20.0 psi
Water Pressure Recommended: 45.0 psi

CODES & STANDARDS

PTLS05X, NSF/ANSI/CAN 61:Q < 1, NSF/ANSI/CAN 372, ASME A112.18.1/CSA B125.1, CEC, State of MA

CERTIFICATIONS




PRODUCT (NOTES)

Requires Valve, sold separately.

.25


PTLS05

.25 Low Profile Three Hole Wall Mounted Lavatory Faucet
with Metal Cross Handles

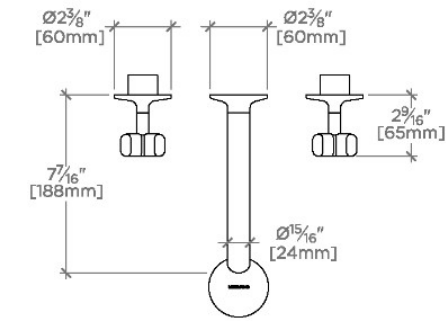


TOP VIEW

SCALE: 1 1/2"=1'-0"

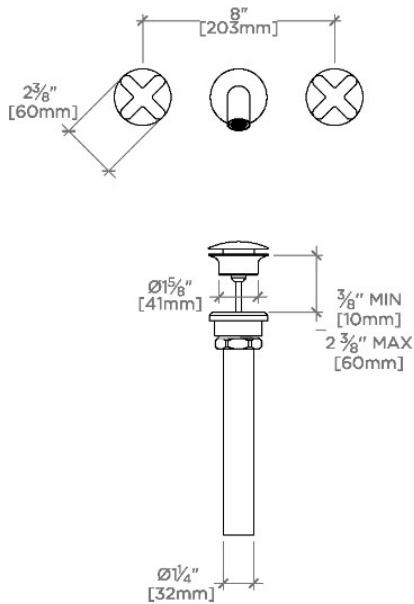

FRONT VIEW

SCALE: 1 1/2"=1'-0"

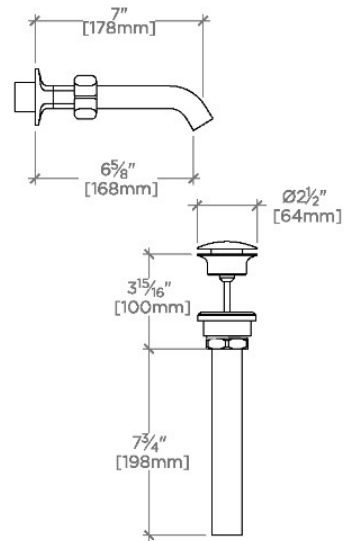

SIDE VIEW

SCALE: 1 1/2"=1'-0"