

## BOND

BKM220

Bond Solo Series Gooseneck Kitchen Faucet and Spray with Straight Lever Handles



SHOWN IN BOND SOLO SERIES GOOSENECK KITCHEN FAUCET AND SPRAY WITH STRAIGHT LEVER HANDLES | BKM220

### TECHNICAL DETAILS

ADA Compliance: Yes  
 Deck Thickness Maximum: 1 7/16"  
 Deck Thickness Minimum: 1/4"  
 Fittings Hole Diameter: 1 3/8"  
 Handle Turn Angle: Quarter Turn  
 Handshower Spray Hose Length: 59"  
 Inlet Connection Size: 1/2"  
 Inlet Connection Type: Male with Supply Nut  
 Integrated Diverter: Y  
 Restricted Maximum Flow Rate: 1.75 gpm  
 Spout Swivel: Y  
 Spray Included In Unit: Y  
 Valve Material: Ceramic  
 Water Pressure Maximum: 85.0 psi  
 Water Pressure Minimum: 25.0 psi  
 Water Pressure Recommended: 45.0 psi

### INSPIRATION

Modern designs infused with rare soul and artistry. Explore our wide range of Bond bath and kitchen elements, from fittings to fixtures to hardware.

### CODES & STANDARDS

BKM220X, NSF/ANSI/CAN 61:Q < 1, NSF/ANSI/CAN 372, ASME A112.18.1/CSA B125.1, CEC, State of MA

### PRODUCT FEATURES

Lever Handles

Powerful Side spray with push button activation

Stocked in Chrome, Nickel, Brass and Dark Nickel

### CERTIFICATIONS




### PRODUCT (NOTES)

# WATERWORKS

## BOND


BKM220

Bond Solo Series Gooseneck Kitchen Faucet and Spray with  
Straight Lever Handles

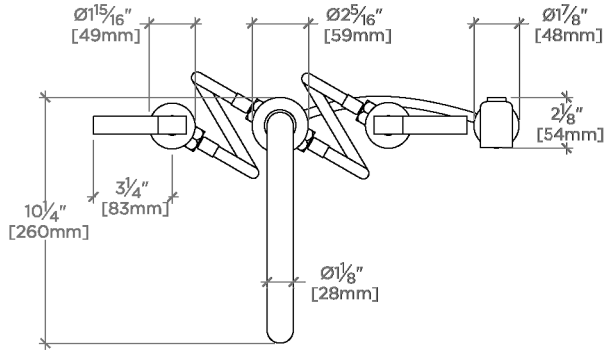


TOP VIEW

SCALE:  $\frac{1}{2}"=1'-0"$

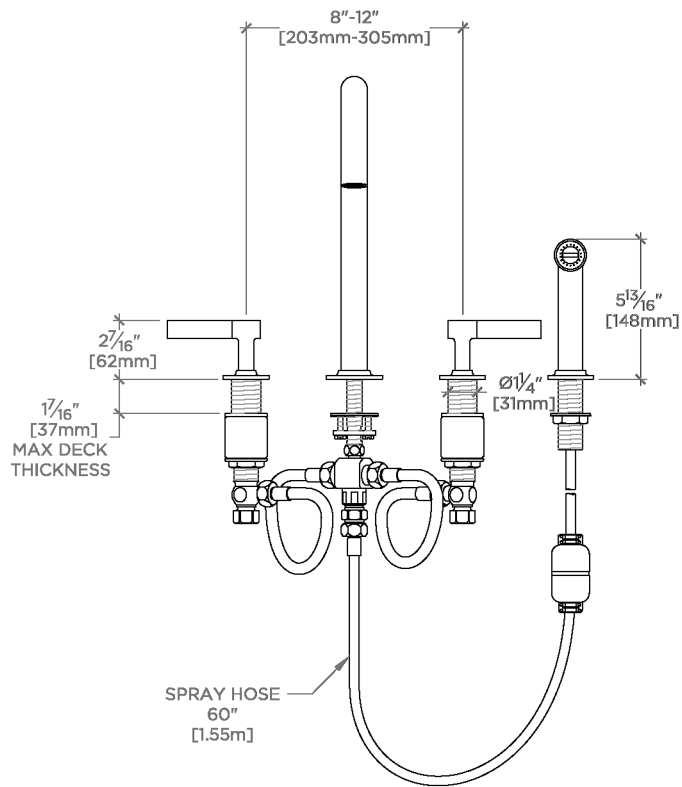

FRONT VIEW

SCALE:  $\frac{1}{2}"=1'-0"$

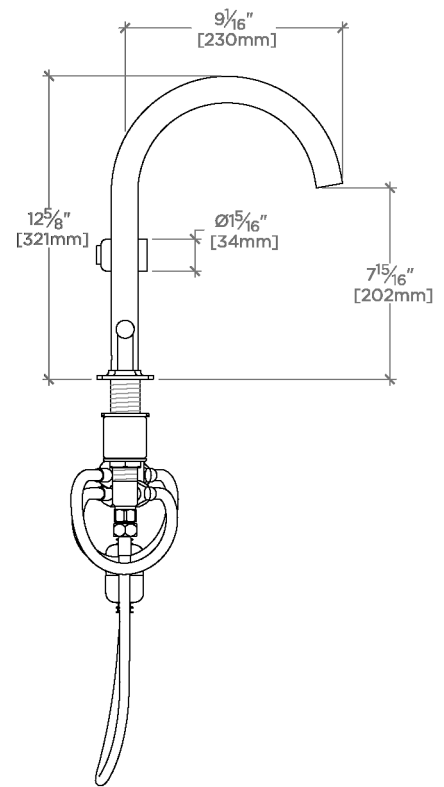

SIDE VIEW

SCALE:  $\frac{1}{2}"=1'-0"$