

HENRY

Henry Handshower On Bar

HNHS10



SHOWN IN HENRY HANDSHOWER ON BAR | HNHS10

INSPIRATION

Influenced by the connection of industry and art Henry easily transitions between modern, traditional, utilitarian and classic settings.

PRODUCT FEATURES

Features a Fixed Spray Pattern

Adjustable 24" bar allows for ease in determining the desired height of Handshower

Stocked in Chrome, Nickel, Brass and Dark Nickel

Available in 1.75gpm (6.6L/min) Flow Rate

TECHNICAL DETAILS

ADA Compliance: When installed per ADA guidelines
Adjustable Versus Fixed Spray: Fixed Spray
Depth/Width: 4 9/16"
Escutcheon Primary Material: Brass
Fittings Hole Diameter: 1 1/4"
Flow Restriction Options: 2.5, 2.2, 2.0, 1.75, 1.5, 0.92
Handshower Spray Hose Length: 59"
Height: 24"
Inlet Connection Size: 1/2"
Inlet Connection Type: Female NPT
Integrated Diverter: N
Pivot: Y
Primary Material: Brass
Suggested Application: Bath
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 20.0 psi
Water Pressure Recommended: 45.0 psi

CODES & STANDARDS

HNHS10X, ASME A112.18.1/CSA B125.1, Waterworks Handshowers use check valves compliant to ASME A112.18.3 for backflow protection. CEC, State of MA

CERTIFICATIONS




PRODUCT (NOTES)

HENRY


Henry Handshower On Bar

HNHS10

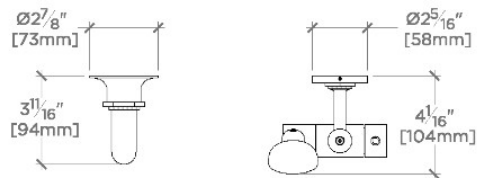


TOP VIEW

SCALE: $1\frac{1}{2}"=1'-0"$

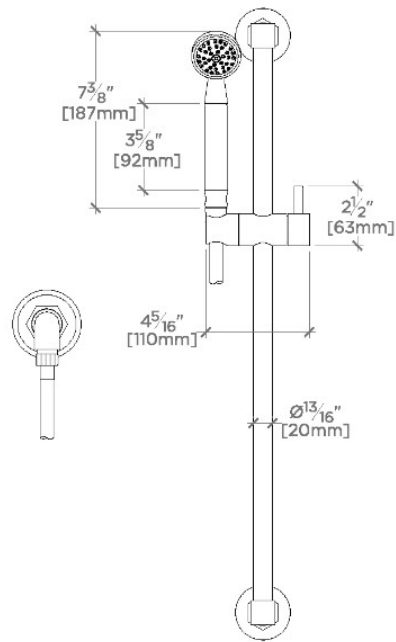

FRONT VIEW

SCALE: $1\frac{1}{2}"=1'-0"$

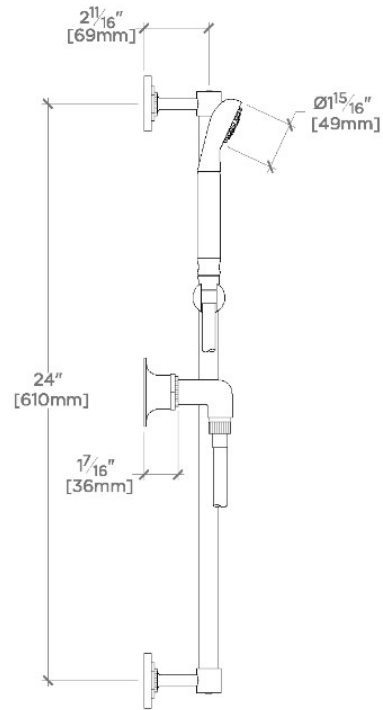

SIDE VIEW

SCALE: $1\frac{1}{2}"=1'-0"$