

BOND

BLS22A

Bond Tandem Series Gooseneck Lavatory Faucet with Guilloche Lines Lever Handles



TECHNICAL DETAILS

ADA Compliance: Yes
Deck Thickness Maximum: 43 mm
Deck Thickness Minimum: 6 mm
Drain Depth Maximum: 67 mm
Drain Hole Diameter: 44 mm
Drain Style: Push Touch
Fittings Hole Diameter: 35 mm
Handle Spread Maximum: 305 mm
Handle Spread Minimum: 203 mm
Handle Turn Angle: Quarter Turn
Drain Depth Minimum: 10 mm
Inlet Connection Size: 1/2"
Inlet Connection Type: Male with Supply Nut
Number of Holes: Three Hole
Primary Material: Brass
Restricted Maximum Flow Rate: 4.5 liters/min
Spout Swivel: N
Valve Material: Ceramic
Water Pressure Maximum: 6.0 bar
Water Pressure Minimum: 1.5 bar
Water Pressure Recommended: 3.0 bar

INSPIRATION

The Bond Collection: Modern bath designs infused with rare soul and artistry. Explore a range of statement-making elements: fittings, washstands, mirrors and more.

PRODUCT FEATURES

Lever Handles

Includes European size push touch drain

Features Linear Guilloche Etching Handles


Stocked in Nickel and Brass

Available in 1.2gpm (4.5L/min) flow rate

BOND


BLS22A

Bond Tandem Series Gooseneck Lavatory Faucet with Guilloche Lines Lever Handles

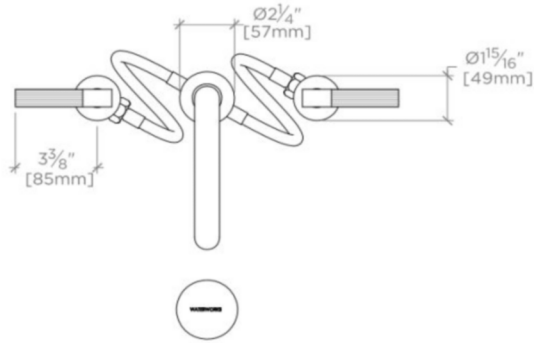


TOP VIEW

SCALE: $\frac{1}{2}"=1'-0"$

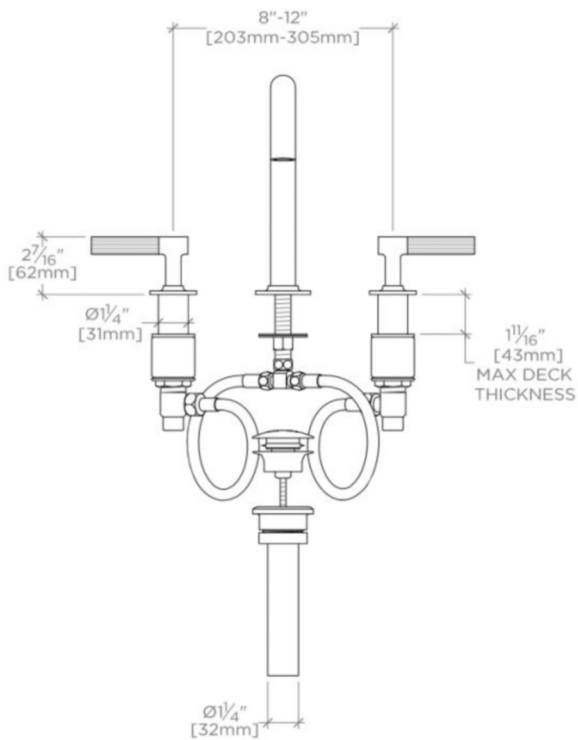

FRONT VIEW

SCALE: $\frac{1}{2}"=1'-0"$

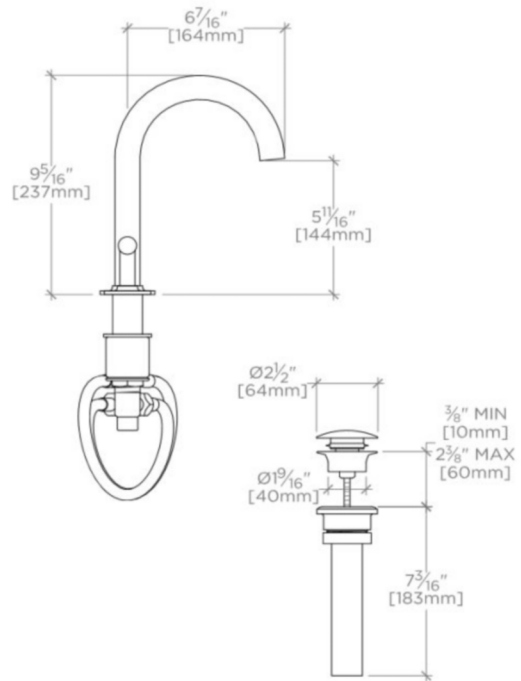

SIDE VIEW

SCALE: $\frac{1}{2}"=1'-0"$