


## BOND

BKM22S

Bond Rally Series Gooseneck Kitchen Faucet and Spray with Lever Handles

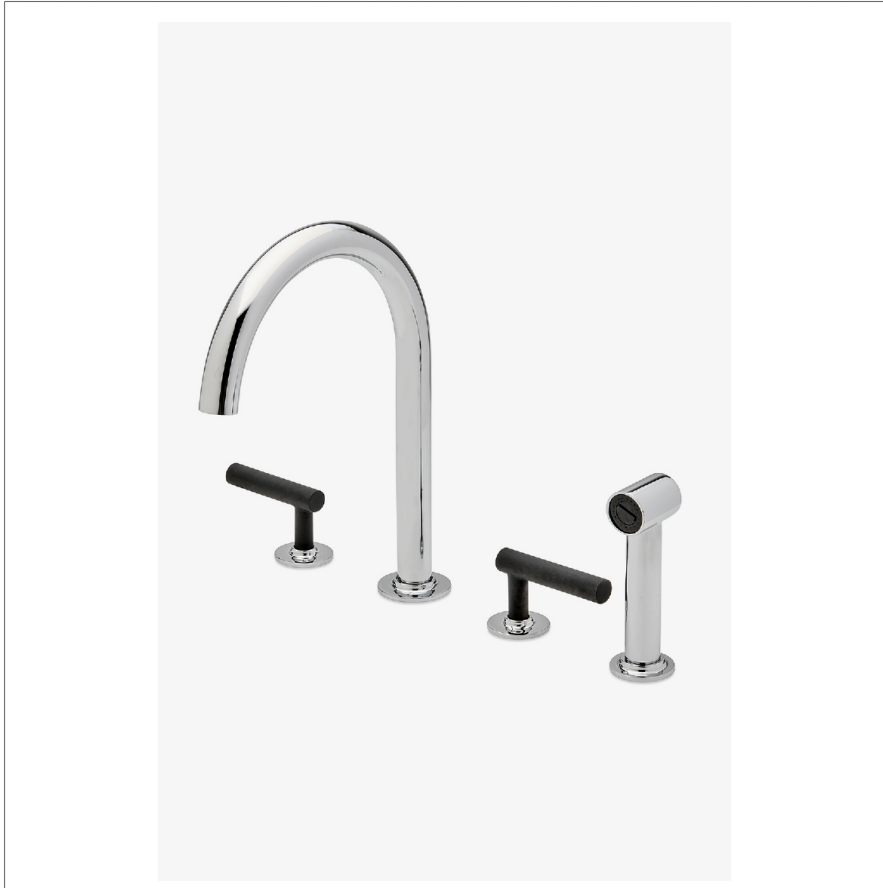

SHOWN IN BOND RALLY SERIES GOOSENECK KITCHEN FAUCET AND SPRAY WITH LEVER HANDLES | BKM22S

### TECHNICAL DETAILS

ADA Compliance: Yes  
 Deck Thickness Maximum: 1 7/16"  
 Deck Thickness Minimum: 1/4"  
 Fittings Hole Diameter: 1 3/8"  
 Handle Turn Angle: Quarter Turn  
 Handshower Spray Hose Length: 59"  
 Inlet Connection Size: 1/2"  
 Inlet Connection Type: Male with Supply Nut  
 Integrated Diverter: Y  
 Restricted Maximum Flow Rate: 1.75 gpm  
 Spout Swivel: Y  
 Spray Included In Unit: Y  
 Valve Material: Ceramic  
 Water Pressure Maximum: 85.0 psi  
 Water Pressure Minimum: 25.0 psi  
 Water Pressure Recommended: 45.0 psi

### INSPIRATION

Modern designs infused with rare soul and artistry. Explore our wide range of Bond bath and kitchen elements, from fittings to fixtures to hardware.

### CODES & STANDARDS

BKM22SX, NSF/ANSI/CAN 61:Q < 1, NSF/ANSI/CAN 372, ASME A112.18.1/CSA B125.1, CEC, State of MA

### PRODUCT FEATURES

- Lever Handles
- Powerful Side spray with push button activation
- Features a Sport Black Finish, smooth and velvety to the touch
- Stocked in Chrome/Sport Black

### CERTIFICATIONS




### PRODUCT (NOTES)

# WATERWORKS

## BOND


BKM22S

Bond Rally Series Gooseneck Kitchen Faucet and Spray with  
Lever Handles

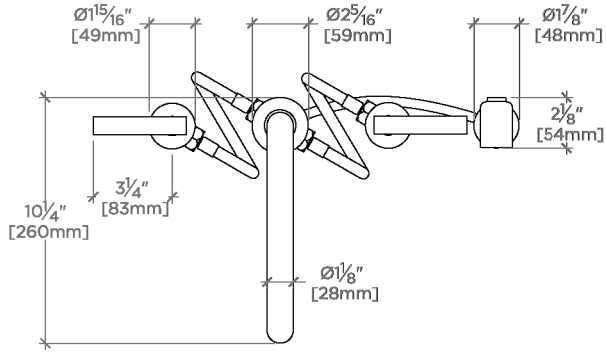


TOP VIEW

SCALE: 1 1/2"=1'-0"

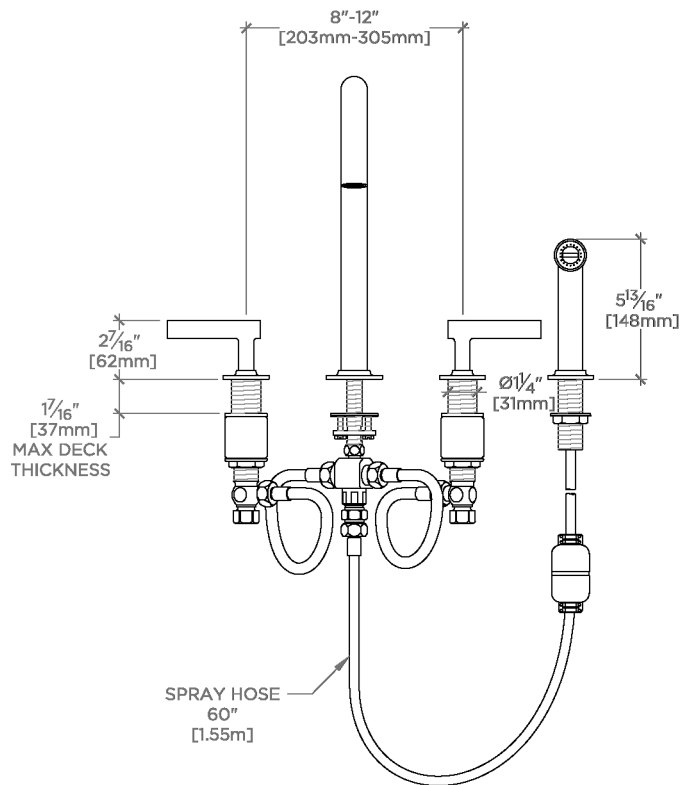

FRONT VIEW

SCALE: 1 1/2"=1'-0"

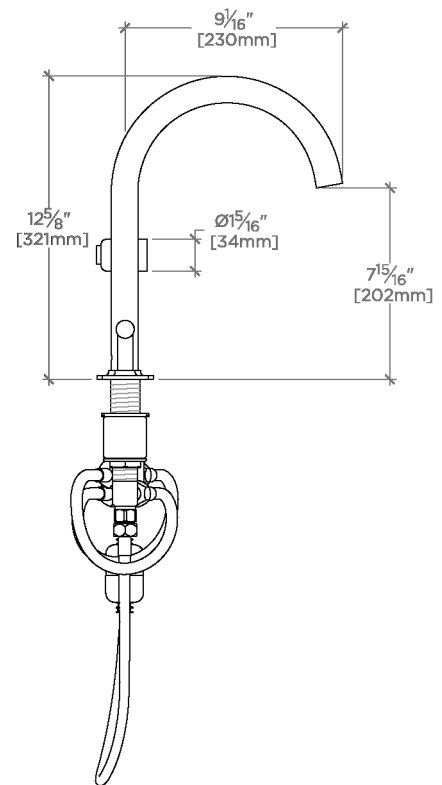

SIDE VIEW

SCALE: 1 1/2"=1'-0"