

Bond

BKM22S

Bond Rally Series Gooseneck Kitchen Faucet and Spray with Lever Handles



SHOWN IN BOND RALLY SERIES GOOSENECK KITCHEN FAUCET AND SPRAY WITH LEVER HANDLES | BKM22S

TECHNICAL DETAILS

ADA Compliance: Yes
 Deck Thickness Maximum: 37 mm
 Deck Thickness Minimum: 6 mm
 Fittings Hole Diameter: 35 mm
 Handle Turn Angle: Quarter Turn
 Handshower Spray Hose Length: 1.5 m
 Inlet Connection Size: 1/2"
 Inlet Connection Type: Male with Supply Nut
 Integrated Diverter: Y
 Restricted Maximum Flow Rate: 6.6 liters/min
 Spout Swivel: Y
 Spray Included In Unit: Y
 Valve Material: Ceramic
 Water Pressure Maximum: 6.0 bar
 Water Pressure Minimum: 1.5 bar
 Water Pressure Recommended: 3.0 bar

INSPIRATION

Modern designs infused with rare soul and artistry. Explore our wide range of Bond bath and kitchen elements, from fittings to fixtures to hardware.

CODES & STANDARDS

BKM22SX, NSF/ANSI/CAN 61:Q < 1, NSF/ANSI/CAN 372, ASME A112.18.1/CSA B125.1, CEC, State of MA

PRODUCT FEATURES

Lever Handles

Powerful Side spray with push button activation

Features a Sport Black Finish, smooth and velvety to the touch

Stocked in Chrome/Sport Black

CERTIFICATIONS




PRODUCT (NOTES)

WATERWORKS

Bond


BKM22S

Bond Rally Series Gooseneck Kitchen Faucet and Spray with
Lever Handles

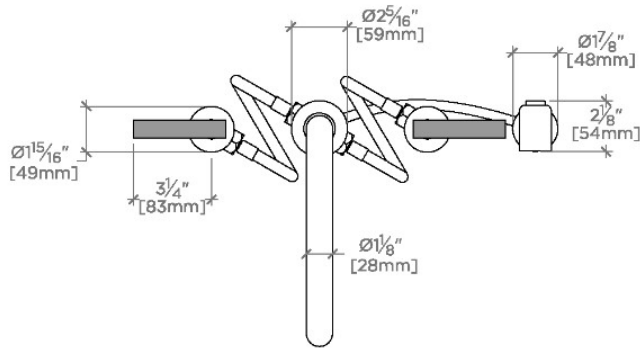


TOP VIEW

SCALE: $1\frac{1}{2}"=1'-0"$

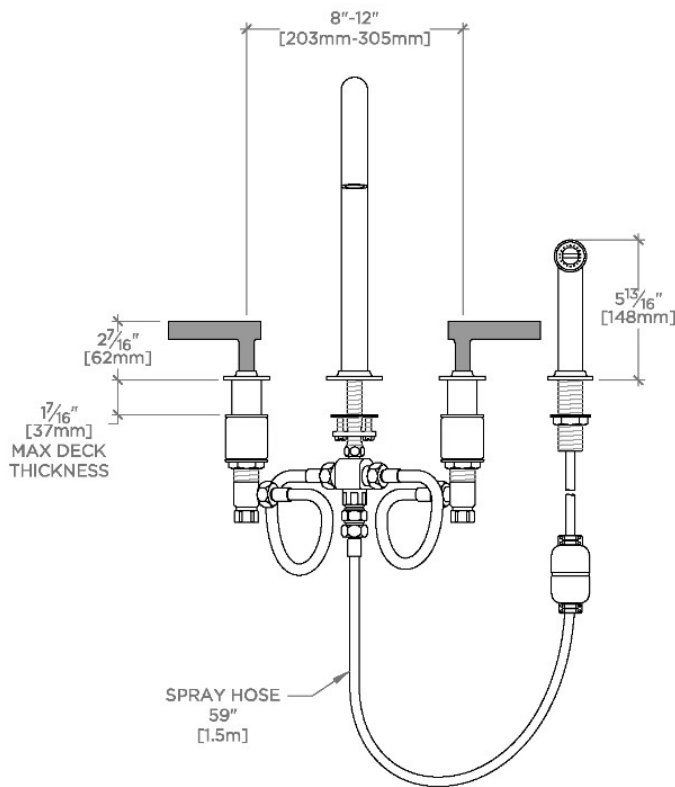

FRONT VIEW

SCALE: $1\frac{1}{2}"=1'-0"$

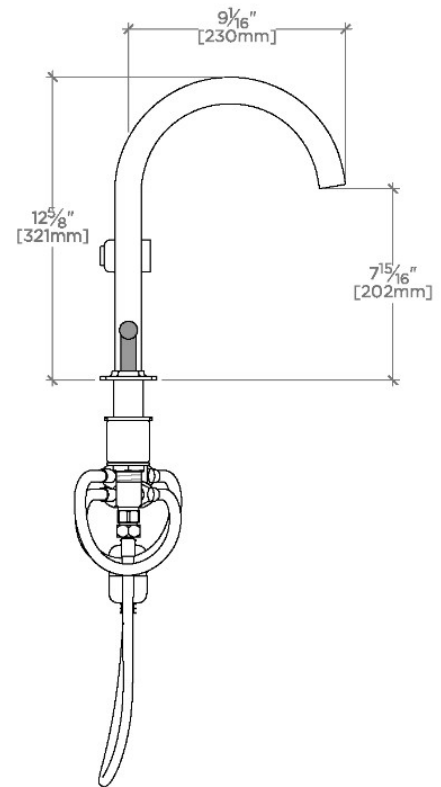

SIDE VIEW

SCALE: $1\frac{1}{2}"=1'-0"$