

Bond

BKM220

Bond Solo Series Gooseneck Kitchen Faucet and Spray with Straight Lever Handles



SHOWN IN BOND SOLO SERIES GOOSENECK KITCHEN FAUCET AND SPRAY WITH STRAIGHT LEVER HANDLES | BKM220

TECHNICAL DETAILS

ADA Compliance: Yes
 Deck Thickness Maximum: 37 mm
 Deck Thickness Minimum: 6 mm
 Fittings Hole Diameter: 35 mm
 Handle Turn Angle: Quarter Turn
 Handshower Spray Hose Length: 1.5 m
 Inlet Connection Size: 1/2"
 Inlet Connection Type: Male with Supply Nut
 Integrated Diverter: Y
 Restricted Maximum Flow Rate: 6.6 liters/min
 Spout Swivel: Y
 Spray Included In Unit: Y
 Valve Material: Ceramic
 Water Pressure Maximum: 6.0 bar
 Water Pressure Minimum: 1.5 bar
 Water Pressure Recommended: 3.0 bar

INSPIRATION

Modern designs infused with rare soul and artistry. Explore our wide range of Bond bath and kitchen elements, from fittings to fixtures to hardware.

CODES & STANDARDS

BKM220X, NSF/ANSI/CAN 61:Q < 1, NSF/ANSI/CAN 372, ASME A112.18.1/CSA B125.1, CEC, State of MA

PRODUCT FEATURES

Lever Handles

Powerful Side spray with push button activation

Stocked in Chrome, Nickel, Brass and Dark Nickel

CERTIFICATIONS




PRODUCT (NOTES)

WATERWORKS

Bond


BKM220

Bond Solo Series Gooseneck Kitchen Faucet and Spray with Straight Lever Handles

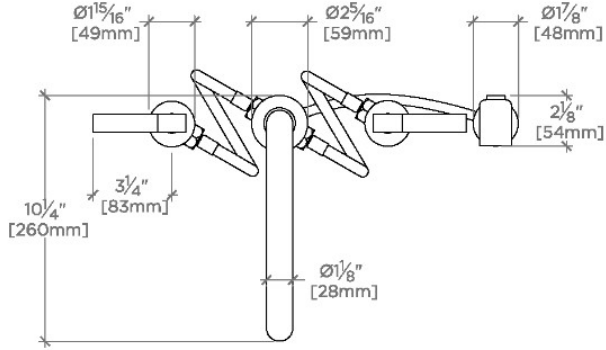


TOP VIEW

SCALE: $\frac{1}{2}$ "=1'-0"

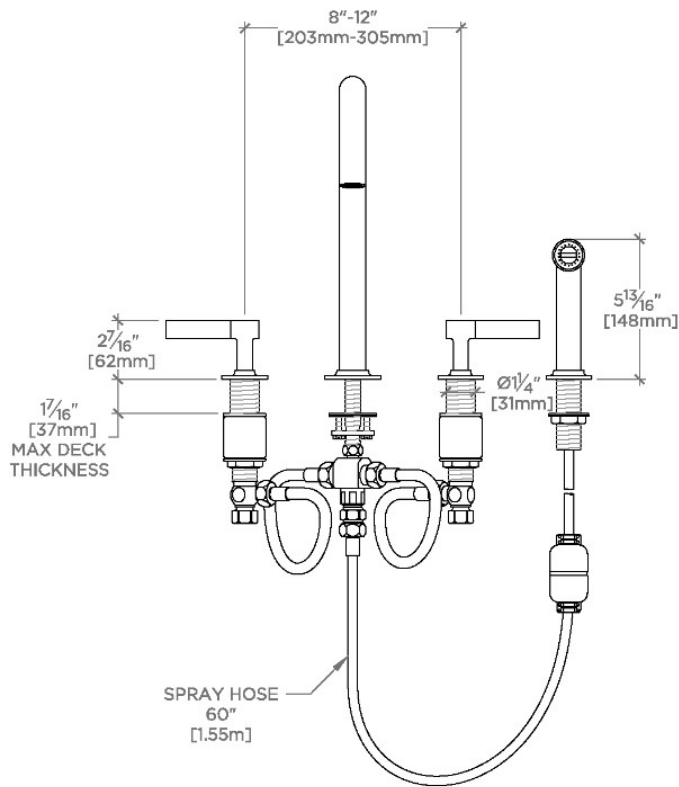

FRONT VIEW

SCALE: $\frac{1}{2}$ "=1'-0"

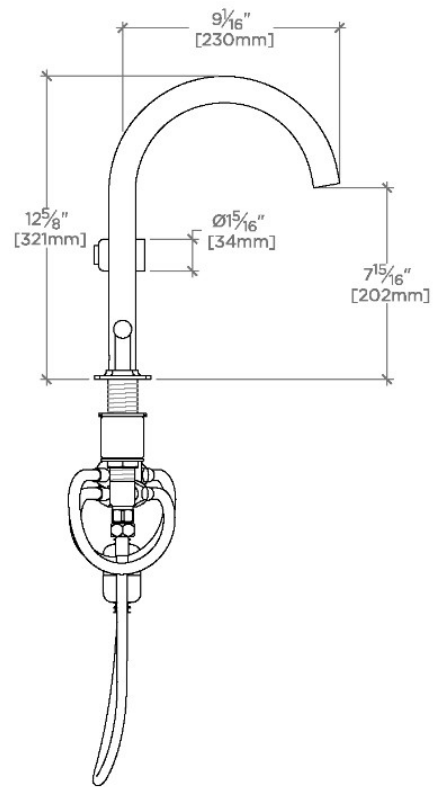

SIDE VIEW

SCALE: $\frac{1}{2}$ "=1'-0"