
Etoile ETS129

Etoile 12" Rain Showerhead with 22" Wall Mounted 90 Degree Shower Arm

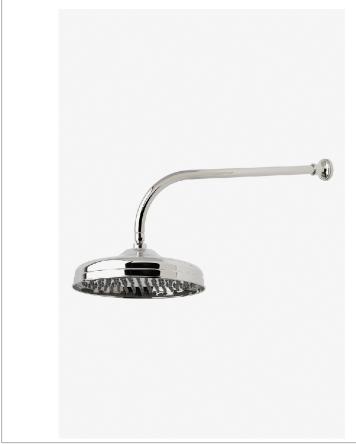

TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed Fittings Hole Diameter: 32 mm Flow Restriction Options: 1.5, 1.75, 2.0 Inlet Connection Size: 1/2" Inlet Connection Type: Male NPT Pivot: Y Primary Material: Brass

Restricted Maximum Flow Rate: 6.6 liters/min Water Pressure Maximum: 6.0 bar Water Pressure Minimum: 1.5 bar Water Pressure Recommended: 3.0 bar

SHOWN IN ETOILE 12" RAIN SHOWERHEAD WITH 22" WALL MOUNTED 90 DEGREE SHOWER ARM | ETS129

INSPIRATION

Defined elegance. Etoile has a European sophistication with a timeless sense of chic.

CODES & STANDARDS

ETS129X, ASME A112.18.1/CSA B125.1, CEC(1.5GPM & 1.75GPM Only), WaterSense(1.5GPM, 1.75GPM & 2.0GPM Only), DOE, State of MA

PRODUCT FEATURES

Made of Brass

Features a swivel 12" rain showerhead with easy clean rubber nozzles

Includes a 22" wall mounted 90 degree shower arm

Stocked in Brass, Chrome, Nickel and Matte Nickel

Rain showerhead available in 1.75gpm (6.6L/min) flow rate

CERTIFICATIONS






PRODUCT (NOTES)

Etoile ETS129

Etoile 12" Rain Showerhead with 22" Wall Mounted 90 Degree Shower Arm

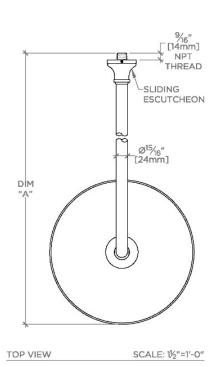

| STYLE NO. | DIM "A" | DIM "B" |
|-----------|---|--|
| ETS128 | 24 ⁵ / ₈ " [625mm] | 18 ⁹ / ₁₆ " [472mm] |
| FRS128 | | |
| JUS128 | | |
| ETS129 | 28 ⁵ / ₈ " [727mm] | 22 ⁹ / ₁₆ " [573mm] |
| FRS129 | | |
| JUS129 | | |

