

HENRY

HNLS70

Henry Wall Mounted Lavatory Faucet with Lever Handles



SHOWN IN HENRY WALL MOUNTED LAVATORY FAUCET WITH LEVER HANDLES | HNLS70

TECHNICAL DETAILS

ADA Compliance: Yes
 Drain Depth Maximum: 2 5/8"
 Drain Depth Minimum: 3/8"
 Drain Hole Diameter: 1 3/4"
 Drain Style: Push Touch
 Fittings Hole Diameter: 1 3/8"
 Flow Restriction Options: 1.0 , 1.2 , 1.5 , 1.75, 2.2
 Handle Spread Maximum: 8"
 Handle Spread Minimum: 8"
 Inlet Connection Size: 1/2"
 Inlet Connection Type: Female NPT
 Suggested Application: Bath
 Water Pressure Maximum: 85.0 psi
 Water Pressure Minimum: 20.0 psi
 Water Pressure Recommended: 45.0 psi

INSPIRATION

Influenced by the connection of industry and art Henry easily transitions between modern, traditional, utilitarian and classic settings.

CODES & STANDARDS

NSF/ANSI/CAN 61:Q < 1, CEC, State of MA

PRODUCT FEATURES

Includes European push touch style drain.


Meets or exceeds the Weighted Average Lead Requirements of 0.25%.

Standard flow rate is 2.2gpm (8.3 L/min) and State of California requires 1.2gpm(4.5 L/min). Also available in other flow options. Contact a sales associate for details.

CERTIFICATIONS


PRODUCT (NOTES)

Henry Wall Mounted Lavatory Faucet with Lever Handles

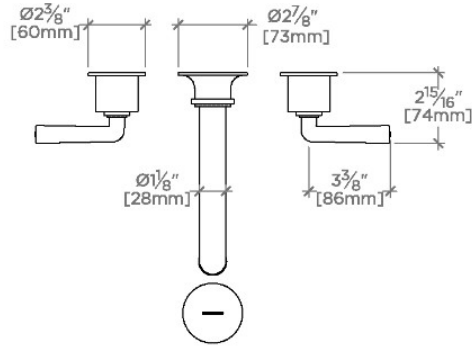


TOP VIEW

SCALE: 1 1/2"=1'-0"

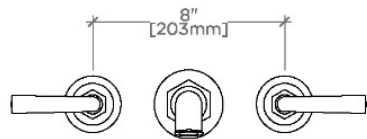

FRONT VIEW

SCALE: 1 1/2"=1'-0"

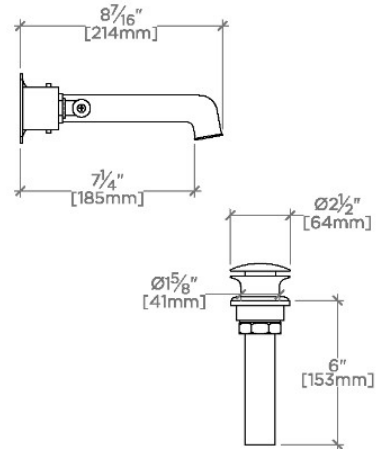

SIDE VIEW

SCALE: 1 1/2"=1'-0"