

Bond

BKM22D

Bond Union Series Gooseneck Kitchen Faucet and Spray with Enamel Guilloche Lines Lever Handles



SHOWN IN BOND UNION SERIES GOOSENECK KITCHEN FAUCET AND SPRAY WITH ENAMEL GUILLOCHE LINES LEVER HANDLES | BKM22D

TECHNICAL DETAILS

ADA Compliance: Yes
 Deck Thickness Maximum: 37 mm
 Deck Thickness Minimum: 6 mm
 Fittings Hole Diameter: 35 mm
 Handle Turn Angle: Quarter Turn
 Handshower Spray Hose Length: 1.5 m
 Inlet Connection Size: 1/2"
 Inlet Connection Type: Male with Supply Nut
 Integrated Diverter: Y
 Restricted Maximum Flow Rate: 6.6 liters/min
 Spout Swivel: Y
 Spray Included In Unit: Y
 Valve Material: Ceramic
 Water Pressure Maximum: 6.0 bar
 Water Pressure Minimum: 1.5 bar
 Water Pressure Recommended: 3.0 bar

INSPIRATION

Modern designs infused with rare soul and artistry. Explore our wide range of Bond bath and kitchen elements, from fittings to fixtures to hardware.

CODES & STANDARDS

BKM22DX, NSF/ANSI/CAN 61:Q < 1, NSF/ANSI/CAN 372, ASME A112.18.1/CSA B125.1, CEC, State of MA

PRODUCT FEATURES

- Lever Handles
- Powerful Side spray with push button activation
- Features Guilloche Lines combined with Enamel Handles
- Stocked in Nickel and Brass
- Available in 1.75gpm (6.6L/min) flow rate

CERTIFICATIONS




PRODUCT (NOTES)

WATERWORKS

Bond


BKM22D

Bond Union Series Gooseneck Kitchen Faucet and Spray with Enamel Guilloche Lines Lever Handles

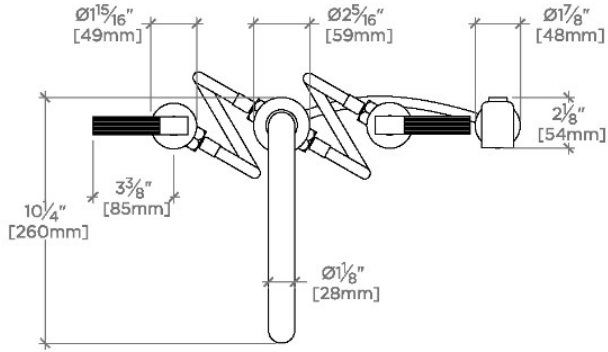


TOP VIEW

SCALE: $\frac{1}{2}$ "=1'-0"

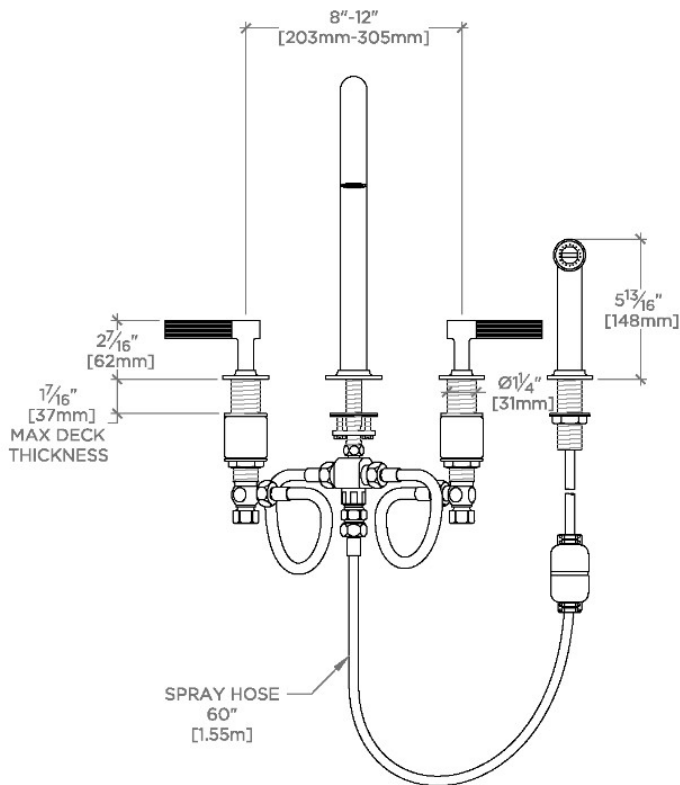

FRONT VIEW

SCALE: $\frac{1}{2}$ "=1'-0"

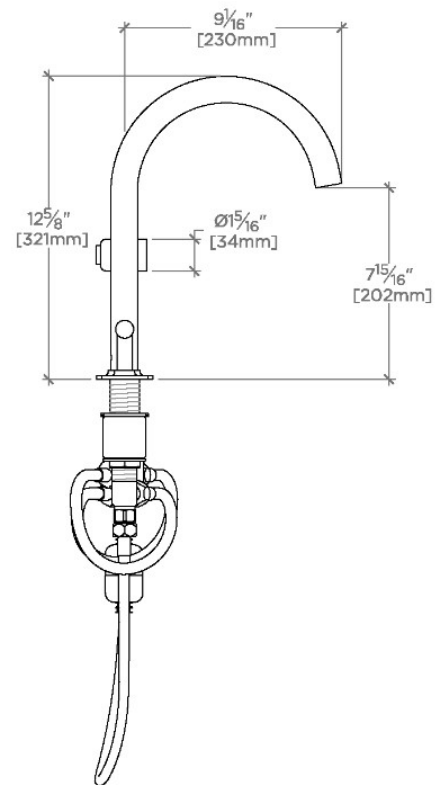

SIDE VIEW

SCALE: $\frac{1}{2}$ "=1'-0"