

UNIVERSAL

Universal Spray Bar

UN76BS



SHOWN IN UNIVERSAL SPRAY BAR| UNBS76

TECHNICAL DETAILS

Adjustable versus Fixed Spray: Fixed Spray
Diameter of Head: 30 mm
Escutcheon Primary Material: Brass
Fittings Hole Diameter: 38 mm
Handshower / Spray Hose Length: 1.5 m
Depth / Width: 95 mm
Height: 610 mm
Inlet Connection Size: 1/2"
Inlet Connection Type: Male G/BSPP
Installation Type: Wall Mounted
Integrated Diverter: N
Length: 64 mm
Pivot: N
Primary Material: Brass
Restricted Maximum Flow Rate: 9.5 liters/min
Suggested Application: Bath
Water Pressure Maximum: 5.0 bar
Water Pressure Minimum: 1.5 bar
Water Pressure Recommended: 3.0 bar

INSPIRATION

Our Universal collection features timeless designs complementing any of our Waterworks. With a wide range of product, from fittings to accessories, Universal adds exquisite proportion and balance to any environment.

CODES & STANDARDS

Code # : ASME A112.18.1, CSA B125, IAPMO, State of MA

PRODUCT FEATURES


Invigorating streams of water are delivered through 18 spray jets
24" long spray bar pivots left to right
Flow rate regulated at 2.5 gallons per minute (gpm)

UNIVERSAL


Universal Spray Bar

UN76BS


Adapters Shipped Loose		
Adapter	Description	Quantity
UNUK04	1/2" NPT Male x 1/2" Male Nipple 50mm Long BSP	1




TOP VIEW SCALE: 1 1/2"=1'-0"

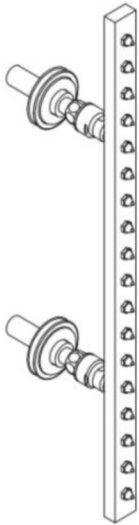

ISO VIEW SCALE: 1 1/2"=1'-0"

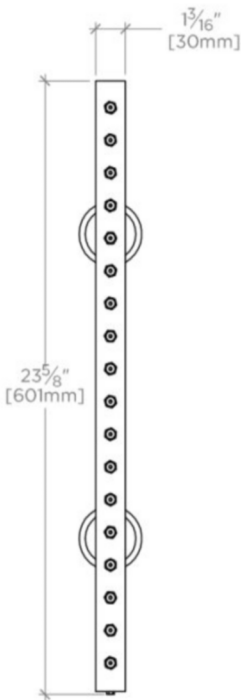

FRONT VIEW SCALE: 1 1/2"=1'-0"

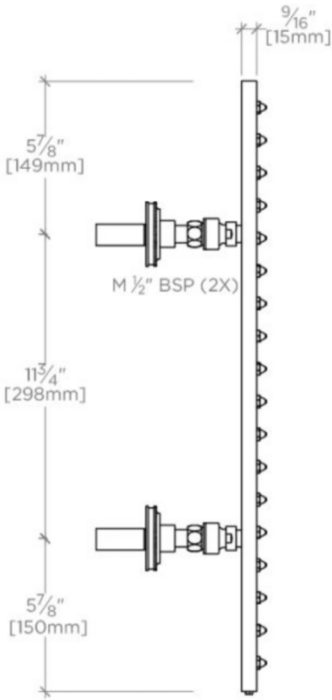

SIDE VIEW SCALE: 1 1/2"=1'-0"