



**STYLE No. DB2P10**  
Two Way for  
Pressure Balance



**STYLE No. DB3P10**  
Three Way for  
Pressure Balance



### SPECIFICATIONS:


Control Valve Rough-in Depth Maximum: 5-5/8" [143mm]  
Control Valve Rough-in Depth Minimum: 3-1/8" [79mm]  
Fitting Hole Diameter: Ø2-1/2" [64mm]

### REQUIRED PLUMBING DETAILS:


Universal Two Way Diverter Valve without Shutoff for  
Pressure Balance Shower Systems  
**STYLE No. GUDV23 (DB2P10) or,**

Universal Three Way Diverter Valve without Shutoff for  
Pressure Balance Shower Systems  
**STYLE No. GUDV65 (DB3P10)**

**STYLE No. DB2T10**  
Two Way for  
Thermostatic



**STYLE No. DB3T10**  
Three Way for  
Thermostatic



### SPECIFICATIONS:

Control Valve Rough-in Depth Maximum: 5-5/8" [143mm]  
Control Valve Rough-in Depth Minimum: 3-1/8" [79mm]  
Fitting Hole Diameter: Ø2-1/2" [64mm]

### REQUIRED PLUMBING DETAILS:

Universal Two Way Diverter Valve with Shutoff for  
Thermostatic Shower Systems  
**STYLE No. GUDV14 (DB2T10) or,**

Universal Three Way Diverter Valve with Shutoff for  
Thermostatic Shower Systems  
**STYLE No. GUDV66 (DB3T10)**

### IMPORTANT:


- To ensure this product is installed properly, you must read and follow these guidelines.
- The owner/user of this product must keep this information for future reference.
- This product must be installed by a professional licensed contractor and must be onsite prior to rough-in to allow the installer to visualize the installation.
- Be sure your installation conforms to federal state, and local codes. In the State of Massachusetts, all installations must comply with the rules and regulations set forth within 248 CMR.
- This product is intended to work with a Waterworks Universal Diverter Valve (SOLD SEPARATELY). Refer to the Installation Guidelines provided with the VALVE for complete rough-in installation details.
- Inspect this product to ensure you have all the parts required for proper installation. Use only a strap wrench or protected/smooth-jaw wrench on any finished surface.
- The use of certain plumber's putty may stain stone or tile surfaces.

### TRIM INSTALLATION:

- **WARNING:** If the VALVE is roughed in too shallow, the TRIM cannot be installed correctly.

1. Remove the TILE GUARD from the VALVE.

- See Figure - 01 for Steps 2 - 4.

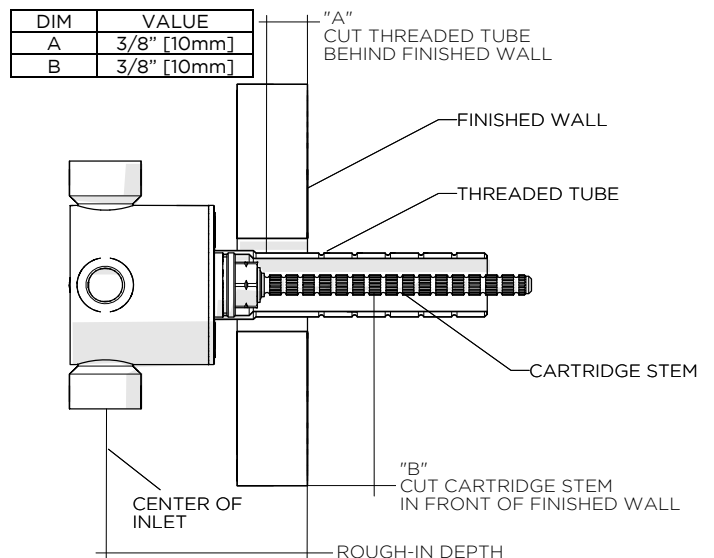

**FIGURE - 01**

These guidelines have been prepared for the professional contractor to aid in the installation of:  
**DECIBEL TWO & THREE WAY DIVERTER VALVE TRIM FOR PRESSURE BALANCE WITH MODERN DOT AND METAL LEVER HANDLE (STYLE No. DB2P10, DB3P10) & DECIBEL TWO & THREE WAY DIVERTER VALVE TRIM FOR THERMOSTATIC WITH MODERN DOT AND METAL LEVER HANDLE (STYLE No. DB2T10, DB3T10).**  
All dimensions are based on original specification and are subject to change and variation.  
Please consult your Design Associate for current specifications.

**WATERWORKS**  
STUDIO

2. Mark the THREADED TUBE as shown then remove and cut the TUBE.
3. Mark the CARTRIDGE STEM as shown then cut the STEM.
4. Thread the TUBE back onto the CARTRIDGE.

➤ See Figure - 02 for Steps 5 - 6.

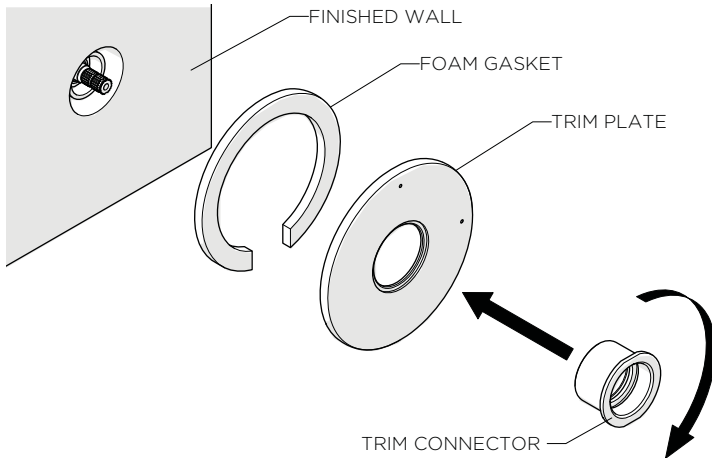


FIGURE - 02

5. Hold the TRIM PLATE against the finished wall in the desired orientation making sure the FOAM GASKET is securely attached.

**NOTE:** If desired, a bead of caulk or a clear silicone may be applied where the TRIM PLATE contacts the finished wall. The use of certain plumber's putty may stain stone or tile surfaces.

6. Thread the TRIM CONNECTOR onto the THREADED TUBE and securely tighten.

➤ See Figure - 03 for Step 7.

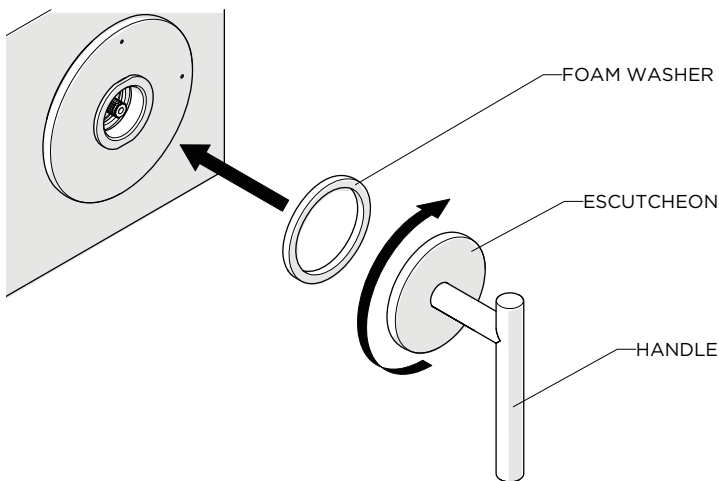


FIGURE - 03

7. Place the HANDLE onto the CARTRIDGE STEM in the desired orientation then thread the ESCUTCHEON into the TRIM CONNECTOR and securely tighten. Make Sure to use the FOAM WASHER provided.

**NOTE:** A FOAM WASHER for the ESCUTCHEON is provided. If desired, a bead of caulk or a clear silicone may be applied where the ESCUTCHEON contacts the finished wall. The use of certain plumber's putty may stain stone or tile surfaces.

## INSPECT INSTALLATION:

8. Turn on the water supply and operate the HANDLE to ensure it is functioning properly.
- If further assistance is required, please contact Product Support at 1-800-927-2120 Monday through Friday, 8am - 6pm EST.
- Refer to the separate Service Parts Documents for available replacement parts.

These guidelines have been prepared for the professional contractor to aid in the installation of:  
DECIBEL TWO & THREE WAY DIVERTER VALVE TRIM FOR PRESSURE BALANCE WITH MODERN DOT AND METAL LEVER HANDLE (STYLE No. DB2P10, DB3P10) & DECIBEL TWO & THREE WAY DIVERTER VALVE TRIM FOR THERMOSTATIC WITH MODERN DOT AND METAL LEVER HANDLE (STYLE No. DB2T10, DB3T10).  
All dimensions are based on original specification and are subject to change and variation.  
Please consult your Design Associate for current specifications.

WATERWORKS  
STUDIO