

HENRY

Henry 5 1/8" Shower Head, Arm and Flange

HNSH10



SHOWN IN HENRY 5 1/8" SHOWER HEAD, ARM AND FLANGE| HNSH10

TECHNICAL DETAILS

ADA Compliance: Yes
 Adjustable versus Fixed Spray: Adjustable Spray
 Diameter of Head: 5 1/8"
 Escutcheon Primary Material: Brass
 Fittings Hole Diameter: 1"
 Flow Restriction Options: 2.5, 2.0, 1.75, 1.5
 Depth / Width: 12 1/4"
 Height: 7"
 Inlet Connection Size: 1/2"
 Inlet Connection Type: Male NPT
 Installation Type: Wall Mounted
 Integrated Diverter: N
 Integrated Spray: N
 Length: 5 1/8"
 Pivot: Y
 Primary Material: Brass
 Spout Swivel: N
 Spray Included in Unit: N
 Suggested Application: Bath
 Water Pressure Maximum: 85.0 psi
 Water Pressure Minimum: 20.0 psi
 Water Pressure Recommended: 45.0 psi

INSPIRATION

Influenced by the connection of industry and art Henry easily transitions between modern, traditional, utilitarian and classic settings.

CODES & STANDARDS

Code # HNSH10X: Complies with ASME A112.18.1/CSA B125.1, ANSI A117.1 ADA & ASTM E 1621-05. Certified with IAPMO, cUPC, CEC & State of MA

PRODUCT FEATURES

The manufacturing process encompasses casting, turning, forging, hand-fitting and hand polishing.


Stocked in 2.5gpm (9.5 L/min) and 1.75gpm (6.6 L/min). State of California requires 1.75gpm (6.6 L/min) to comply with their water conservation requirements. Other flow options are available to order, contact your sales associate or call 1 (800) 899-6757 for details.




HENRY

HNSH10


Henry 5 1/8" Shower Head, Arm and Flange

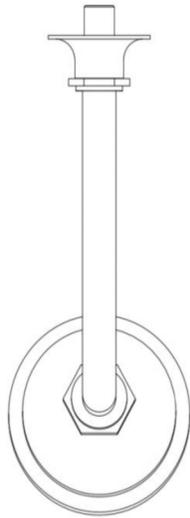

TOP VIEW SCALE: 3"=1'-0"



FRONT VIEW SCALE: 3"=1'-0"

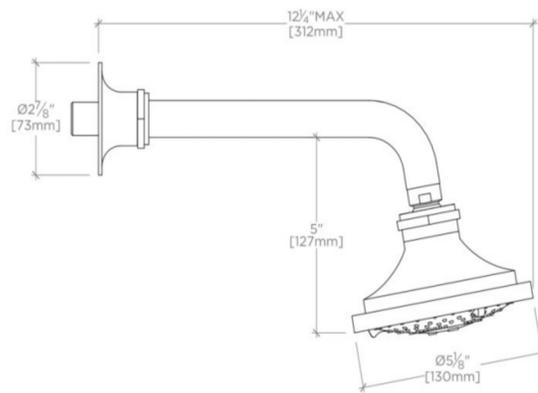

SIDE VIEW SCALE: 3"=1'-0"