

BOND

BNS265

Bond 6" Showerhead with 8" Wall Mounted 45 Degree Shower Arm



SHOWN IN BOND 6" SHOWERHEAD WITH 8" WALL MOUNTED 45 DEGREE SHOWER ARM | BNS265

TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed
 Fittings Hole Diameter: 1 1/4"
 Flow Restriction Options: 1.5, 1.75, 2.0
 Inlet Connection Size: 1/2"
 Inlet Connection Type: Female Straight Threads with Rubber Washer
 Pivot: Y
 Primary Material: Brass
 Restricted Maximum Flow Rate: 1.75 gpm
 Water Pressure Maximum: 85.0 psi
 Water Pressure Minimum: 20.0 psi
 Water Pressure Recommended: 45.0 psi

INSPIRATION

Modern designs infused with rare soul and artistry. Explore our wide range of Bond bath and kitchen elements, from fittings to fixtures to hardware.

CODES & STANDARDS

BNS265X, ASME A112.18.1/CSA B125.1, CEC(1.5GPM & 1.75GPM Only), WaterSense(1.5GPM, 1.75GPM & 2.0GPM Only), DOE, State of MA

PRODUCT FEATURES

Made of Brass

Features a swivel 6" showerhead with easy clean rubber nozzles

Includes a 8" wall mounted 45 degree shower arm

Stocked in Brass, Chrome and Nickel

Showerhead available in 1.75gpm (6.6L/min) flow rate

CERTIFICATIONS




PRODUCT (NOTES)

BOND

BNS265

Bond 6" Showerhead with 8" Wall Mounted 45 Degree Shower Arm

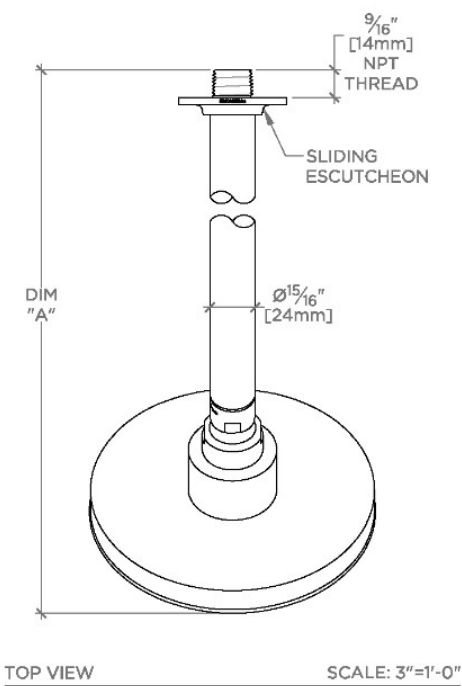

STYLE NO.	DIM "A"	DIM "B"
BNS265	12 13/16" [325mm]	8 1/4" [209mm]
BNS266	14 13/16" [376mm]	10 1/4" [260mm]

