

CANTEEN

CEKM30

Canteen One Hole Integrated Pull Spray Kitchen Faucet with Oak Lever Handle



TECHNICAL DETAILS

Adjustable versus Fixed Spray: Fixed
Deck Thickness Maximum: 2 1/4"
Deck Thickness Minimum: 1/4"
Escutcheon Primary Material: Brass
Fittings Hole Diameter: 2 1/8"
Flow Restriction Options: 2.0, 1.75, 1.5
Handle Turn Angle: Quarter Turn Each Way
Depth / Width: 11 5/16"
Height: 11 15/16"
Inlet Connection Size: 3/8"
Inlet Connection Type: Compression Connector Hoses
Installation Type: Deck Mounted
Integrated Diverter: Y
Length: 5 15/16"
Number of Holes: One Hole
Primary Material: Brass
Restricted Maximum Flow Rate: 2.2 gpm
Spout Swivel: Y
Spray Included in Unit: Y
Suggested Application: Bar, Kitchen, Laundry
Valve Material: Ceramic
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 30.0 psi
Water Pressure Recommended: 45.0 psi

INSPIRATION

The traditional kitchen faucet, elevated into a luxurious, heavy-built product. Inspired by the clean simplicity of vintage water pumps, Canteen is sized for drama, with a tall, industrial-elegant spout and durable, handcrafted oak levers. This original, innovative silhouette brings character and dimension to a kitchen.

PRODUCT FEATURES

Inspired by the clean simplicity of vintage water pumps.

Features a tall, industrial-elegant spout and durable, handcrafted oak levers.

Single hole faucet with pull out spray.

Sprayer features a momentary spray button, when pressed it switches from stream to jet spray. Sprayer remains engaged while holding the button. When the button is released, the spray returns to stream.


Standard flow rate is 2.2gpm (8.3 L/min) and State of California requires a maximum of 1.8gpm(6.8 L/min). Also

WATERWORKS

CANTEEN


CEKM30

Canteen One Hole Integrated Pull Spray Kitchen Faucet with Oak
Lever Handle




TOP VIEW

SCALE: 1/2"=1'-0"

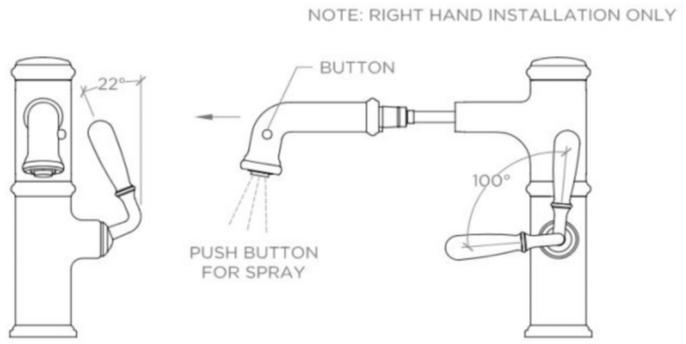


SPRAY AND HANDLE OPERATION VIEW

SCALE: 1/2"=1'-0"

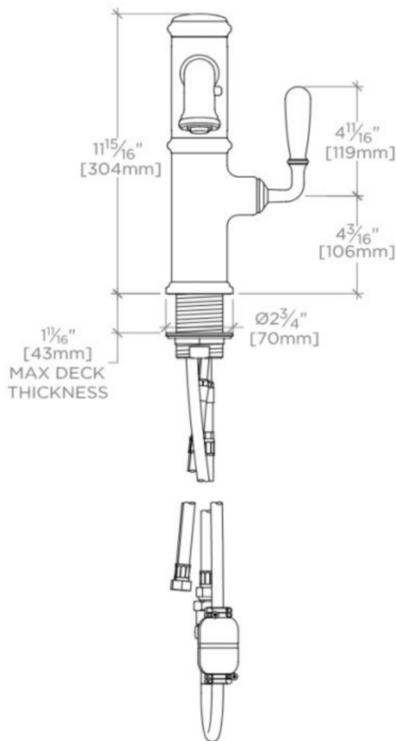

FRONT VIEW

SCALE: 1/2"=1'-0"

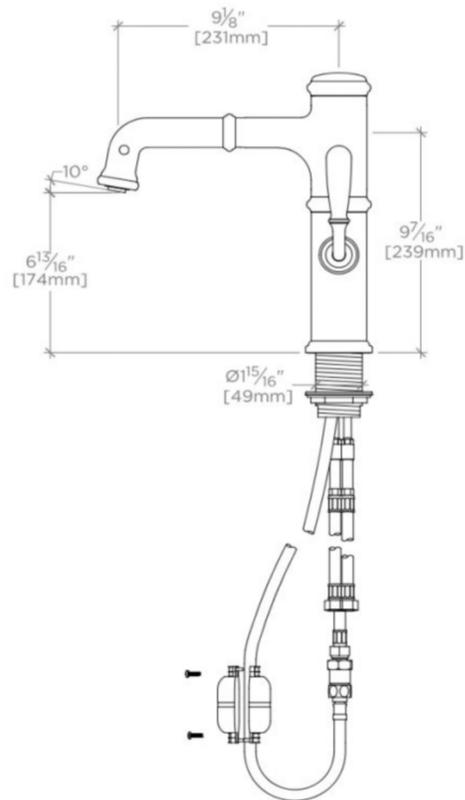

SIDE VIEW

SCALE: 1/2"=1'-0"