

## FORO

FRKM70

Foro Two Hole Gooseneck Kitchen Faucet with Metal Lever Handle & Pull Down Spray



### TECHNICAL DETAILS

Deck Thickness Maximum: 3"  
Deck Thickness Minimum: 1/4"  
Fittings Hole Diameter: 1 3/8"  
Flow Restriction Options: 1.75  
Handle Turn Angle: Quarter Turn  
Inlet Connection Size: 3/8"  
Inlet Connection Type: Compression Connector Hoses  
Restricted Maximum Flow Rate: 1.75 gpm  
Valve Material: Ceramic  
Water Pressure Maximum: 85.0 psi  
Water Pressure Minimum: 20.0 psi  
Water Pressure Recommended: 45.0 psi

### INSPIRATION

A mix of historical references, including finely etched vintage silver, come together in this twist on classical design - a wonderfully elegant formal statement.

### PRODUCT FEATURES

Metal Lever handle with pull down spray. Swivel spout.

Spray is operated by a trigger to switch between aerated stream and jet spray. The trigger returns to stream when water is turned off and stays locked in spray without having to hold it closed. Sprayer face has rubber nozzles for easy cleaning.

Features signature engraving detail

Available to install Handle control on left or right side of spout. Handles tilts to open and swings to the left for hot


# WATERWORKS

## FORO

## FRKM70


Foro Two Hole Gooseneck Kitchen Faucet with Metal Lever Handle & Pull Down Spray

NOTE: RIGHT AND LEFT HAND INSTALLATION IS POSSIBLE

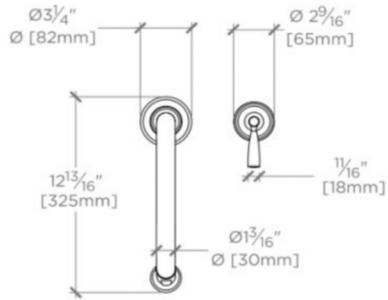


TOP VIEW

SCALE: 1"=1'-0"

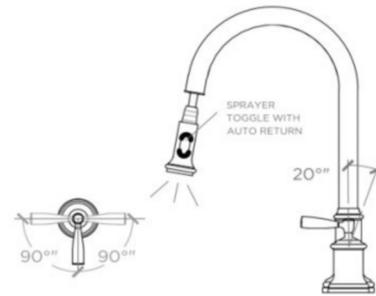


SPRAY AND HANDLE OPERATION VIEW

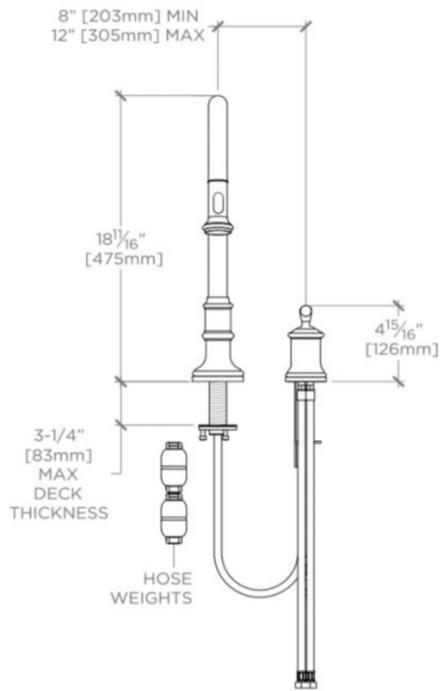

FRONT VIEW

SCALE: 1"=1'-0"

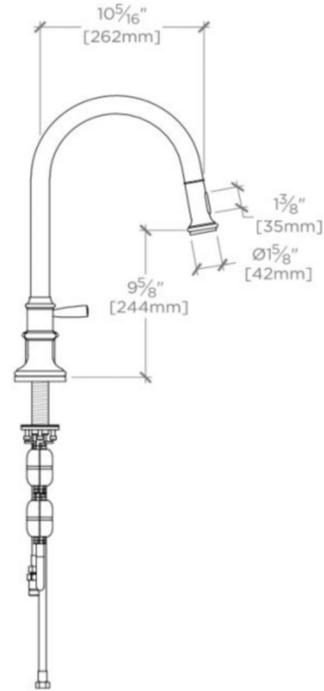

SIDE VIEW

SCALE: 1"=1'-0"