


LUDLOW

LDS201

Ludlow 10" Rain Showerhead with 12" Ceiling Mounted Shower Arm

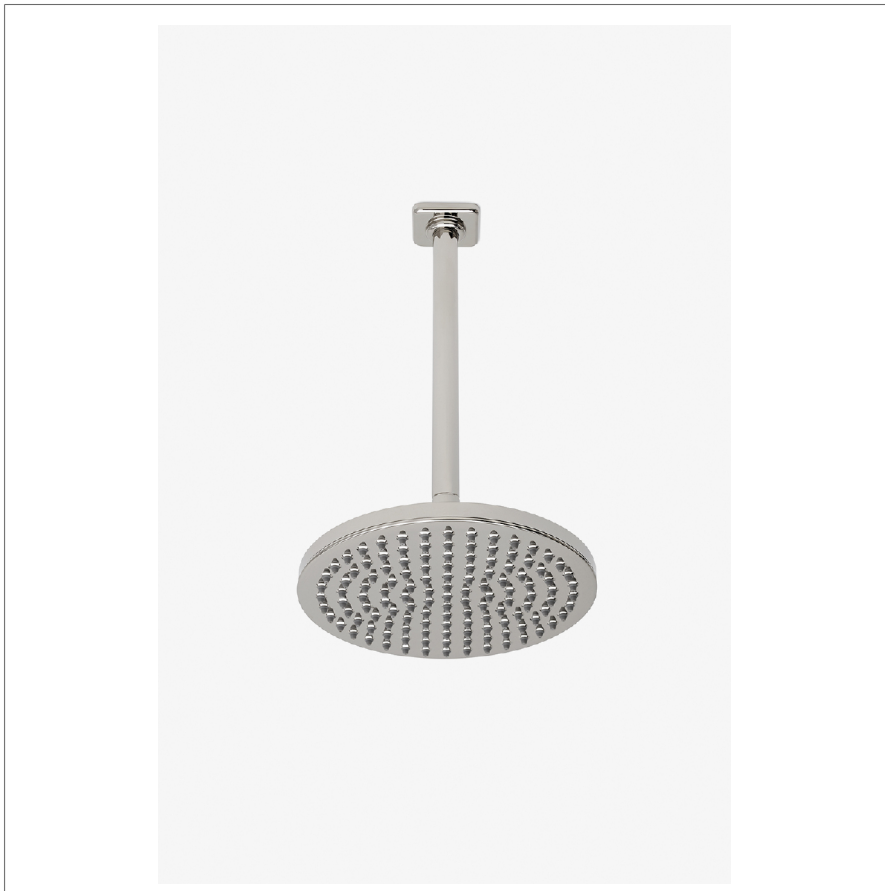

SHOWN IN LUDLOW 10" RAIN SHOWERHEAD WITH 12" CEILING MOUNTED SHOWER ARM | LDS201

TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed
Fittings Hole Diameter: 1 1/4"
Flow Restriction Options: 1.5, 1.75, 2.0
Inlet Connection Size: 1/2"
Inlet Connection Type: Male NPT
Pivot: Y
Primary Material: Brass
Restricted Maximum Flow Rate: 1.75 gpm
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 20.0 psi
Water Pressure Recommended: 45.0 psi

INSPIRATION

Our fresh take on American industrial design comes in three styles, each of them clean-lined, and distinct to Waterworks.

CODES & STANDARDS

LDS201X, ASME A112.18.1/CSA B125.1, CEC(1.5GPM & 1.75GPM Only), WaterSense(1.5GPM, 1.75GPM & 2.0GPM Only), DOE, State of MA

PRODUCT FEATURES

Made of Brass

Features a swivel 10" rain showerhead with easy clean rubber nozzles

Includes a 12" ceiling mounted shower arm

Stocked in Brass, Chrome and Nickel

Rain showerhead available in 1.75gpm (6.6L/min) flow rate

CERTIFICATIONS




PRODUCT (NOTES)

WATERWORKS

LUDLOW

LDS201


Ludlow 10" Rain Showerhead with 12" Ceiling Mounted Shower Arm

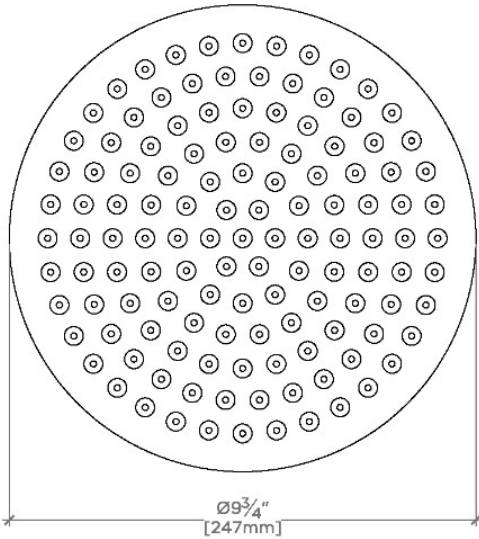

CEILING VIEW


SCALE: 3"=1'-0"

STYLE NO.	DIM "A"	DIM "B"
LDS200	10 ⁵ / ₁₆ " [261mm]	6 ⁹ / ₁₆ " [167mm]
LDS201	16 ⁵ / ₁₆ " [414mm]	12 ⁹ / ₁₆ " [319mm]
LDS202	22 ⁵ / ₁₆ " [566mm]	18 ⁹ / ₁₆ " [472mm]

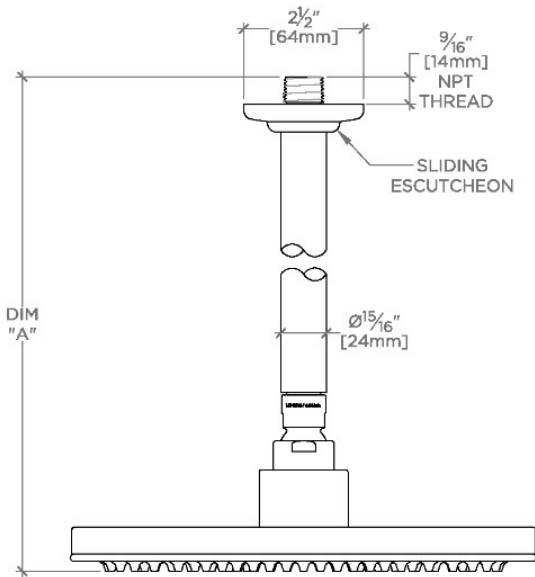

FRONT VIEW

SCALE: 3"=1'-0"

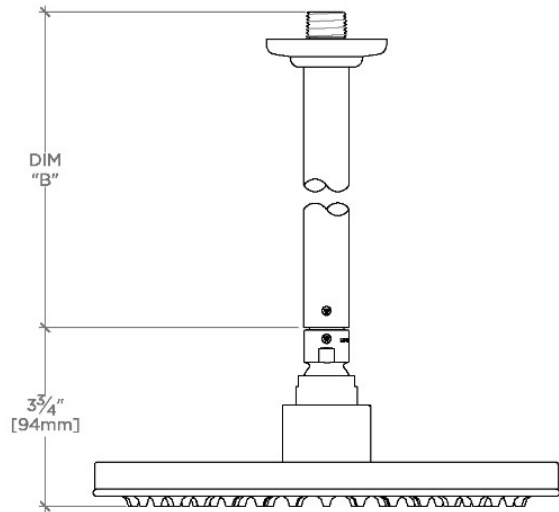

SIDE VIEW

SCALE: 3"=1'-0"