


JULS 77

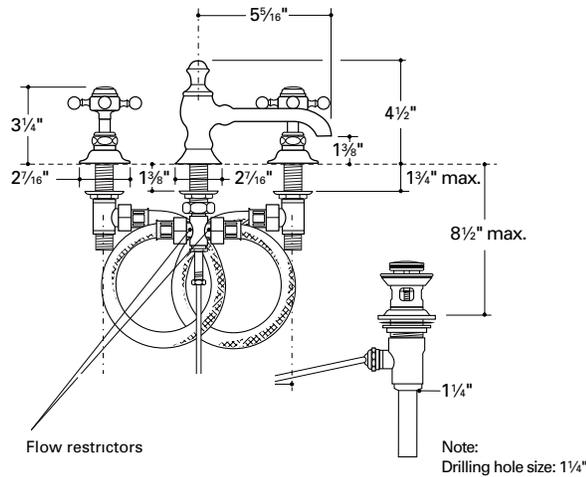

INSTALLATION GUIDELINES

- Use only a protected, smooth-jawed, or strap wrench on any finished surface.
- If possible, install this faucet assembly on the lavatory before setting.
- To remove trim from valve body: Pull out index assembly (held in place by friction O-ring), exposing the screw for the handle. The cover and escutcheon should be hand tight.
- DO NOT use putty on deck fittings. Upper and lower washers are provided.
- When you screw the escutcheon onto the deck valve body, expose several threads above it. Next, screw down the valve cover until it seats. Then move up the escutcheon until it loosely meets the bottom of the cover. Finally, tighten the bottom lock nut to secure the valve to the deck.
- Once the spout is securely mounted, install the flexible hoses between the spout and valve bodies using the gaskets provided.
- The upper waste assembly can be set with putty.
- Check for leaks.
- Adjust the vertical pop-up rod so that the knob rests $\frac{1}{32}$ " above the spout when the waste is in the full open position. If rod hits the trap, cut excess.
- Basin nuts are provided.
- The flow-restriction devices are located on both inlets of the spout's tee assembly.
- If further assistance is required, please contact Product Support at 1-800-927-2120 (8am-7pm EST).

These guidelines have been prepared for the professional contractor to aid in the installation of:
JULIA LAVATORY FAUCET WITH CROSS HANDLES (JULS 19)

All dimensions are based on original specifications and are subject to change and variation. Please consult your Design Associate for current specifications.