

UNIVERSAL

UNTS34

Universal Wall Mounted Tub Spout



SHOWN IN UNIVERSAL WALL MOUNTED TUB SPOUT | UNTS34

TECHNICAL DETAILS

ADA Compliance: Yes
Adjustable Versus Fixed Spray: Fixed Spray
Depth/Width: 7.675"
Escutcheon Primary Material: Brass
Fittings Hole Diameter: 1 1/4"
Inlet Connection Size: 3/4"
Inlet Connection Type: Female NPT
Installation Type: Wall Mounted
Length: 2 1/2"
Primary Material: Brass
Spout Swivel: N
Suggested Application: Bath
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 20.0 psi
Water Pressure Recommended: 45.0 psi

INSPIRATION

Featuring enduring designs that complement any Waterworks element, this collection spans fittings to accessories, bringing exquisite proportion and balance to any environment.

CODES & STANDARDS

ASME A112.18.1/CSA B125.1, CEC, State of MA, WRAS

PRODUCT FEATURES

Create a refined environment for your daily ritual by installing an exquisitely proportioned Universal tub spout

A clean, universal aesthetic is applicable to all bath environments (traditional to modern)

A wall mounted tub spout works seamlessly with Waterworks' thermostatic or diverter shower systems

CERTIFICATIONS




PRODUCT (NOTES)


UNIVERSAL

UNTS34


Universal Wall Mounted Tub Spout

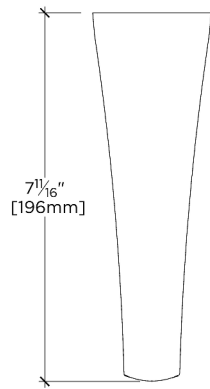

TOP VIEW SCALE: 3"=1'-0"



FRONT VIEW SCALE: 3"=1'-0"

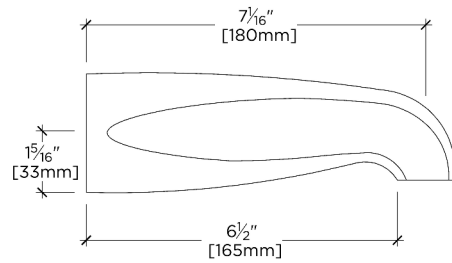

SIDE VIEW SCALE: 3"=1'-0"